


UNITED STATES DEPARTMENT OF AGRICULTURE  
NATURAL RESOURCES CONSERVATION SERVICE

**GEORGIA STANDARD DRAWINGS - WINTER FEEDER FACILITY FOR 80 HEAD CONSTRUCTED WITH 6" X 8" POSTS SPACED 10' O.C. AND ENGINEERED TRUSSES SPACED 5' O.C.**

- The following drawings were prepared in accordance with Practice Code 313 - Waste Storage Facility and Georgia Building Code (International Building Code 2000). This building is designed to
  - sustain wind speeds of 100 mph with no snow load  
or
  - sustain wind speeds of 90 mph with a ground snow load of 10 psf.
- Engineered trusses shall be designed to sustain the above listed conditions and 2964 lbs uplift at each truss to girder connection.
- This design is intended for 12' walls without the option of a sidedshed.
- This design is not intended for construction on an isolated hill, ridge, or escarpment in any region of the state.
- Any changes to these drawings must be approved by an engineer with job approval Level IV or greater.

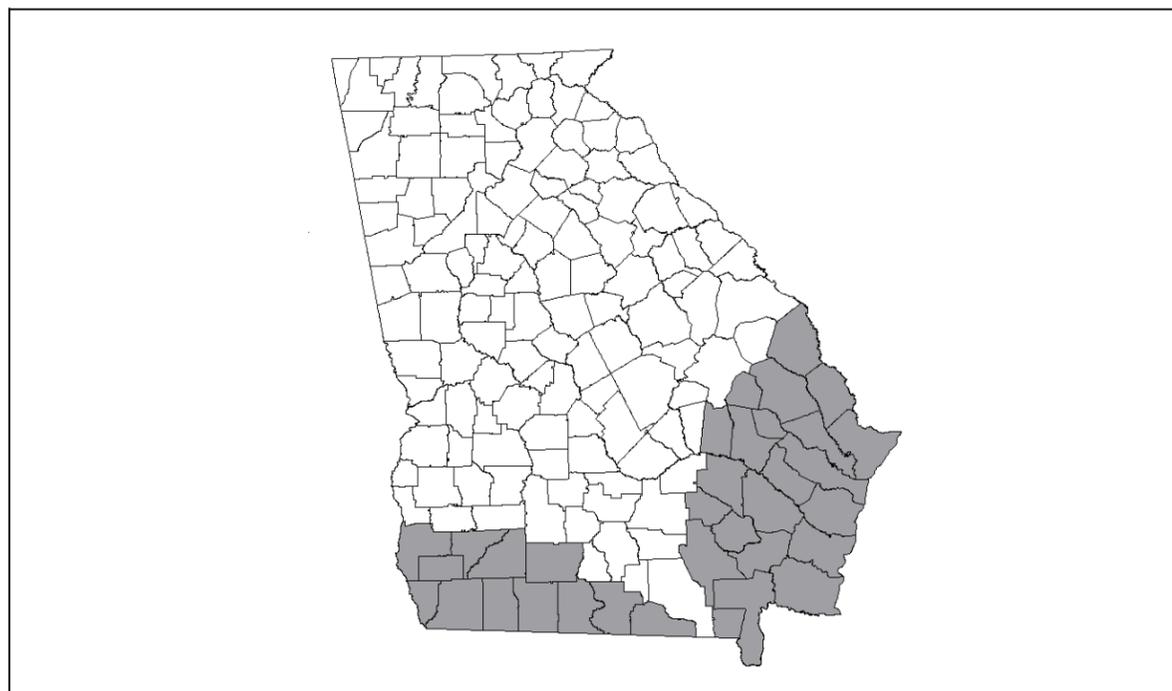

This design is not intended for use in counties subject to hurricane wind loads shaded gray above.

\_\_\_\_\_ WINTER FEEDER FACILITY  
\_\_\_\_\_ COUNTY, GEORGIA

PRE-CONSTRUCTION CERTIFICATION:

THE \_\_\_\_\_ WINTER FEEDER WILL BE CONSTRUCTED IN ACCORDANCE WITH THE FOLLOWING DRAWINGS AND PRACTICE CODE 313. ALL CHANGES HAVE BEEN APPROVED BY AN ENGINEER WITH JOB APPROVAL AUTHORITY LEVEL IV OR GREATER. ALL ADDITIONS HAVE BEEN APPROVED BY NRCS.

OWNER	DATE	NRCS REPRESENTATIVE	DATE	ENGINEER (IF REQUIRED)	DATE
-------	------	---------------------	------	------------------------	------

AS-BUILT CERTIFICATION:

THIS PRACTICE HAS BEEN CONSTRUCTED IN ACCORDANCE TO THESE PLANS AND MEETS NRCS STANDARDS AND SPECIFICATIONS.

NRCS REPRESENTATIVE	DATE	ENGINEER (IF REQUIRED)	DATE
---------------------	------	------------------------	------

INDEX TO DRAWINGS:


- SHEET 1 - COVER SHEET
- SHEET 2 - ISOMETRIC VIEW  
GENERAL NOTES
- SHEET 3 - PLAN VIEW
- SHEET 4 - SIDE WALL DETAIL  
FIBER REINFORCED CONTRACTION JOINT DETAIL  
MECHANICAL POST ANCHOR DETAIL  
CONCRETE POST FOOTING DETAIL
- SHEET 5 - WOOD TREATMENT TABLE  
TRUSS TO POST CONNECTION DETAIL  
TRUSS TO GIRDER CONNECTION DETAIL  
HURRICANE STRAP DETAILS  
Y-BRACING DETAIL
- SHEET 6 - TRUSS BRACING DETAILS

WASTE STORAGE FACILITY:  
JOB CLASS: \_\_\_\_\_

REVISIONS		
DATE	APPROVED	TITLE
06/11	J. HOLLOWAY	STATE ENGINEER


Date	09/05
Designed	B. KIMSEY
Drawn	W. BROWN S. GOSS
Checked	H. MCFARLAND B. KIMSEY
Approved	H. MCFARLAND

**GEORGIA WINTER FEEDER**  
**80 HEAD**  
 (12' Walls, 6"x8" Posts Spaced 10' o.c.)

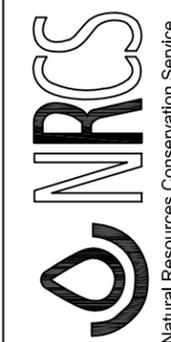

File Name  
ga-eng-313-wf3  
Drawing Name  
Cover  
06/17/2011 8:57 AM  
Sheet 1 of 6

NOTE: USE 29 GAUGE GALVANIZED METAL  
(INSTALL ACCORDING TO MANUFACTURER'S SPECIFICATIONS)

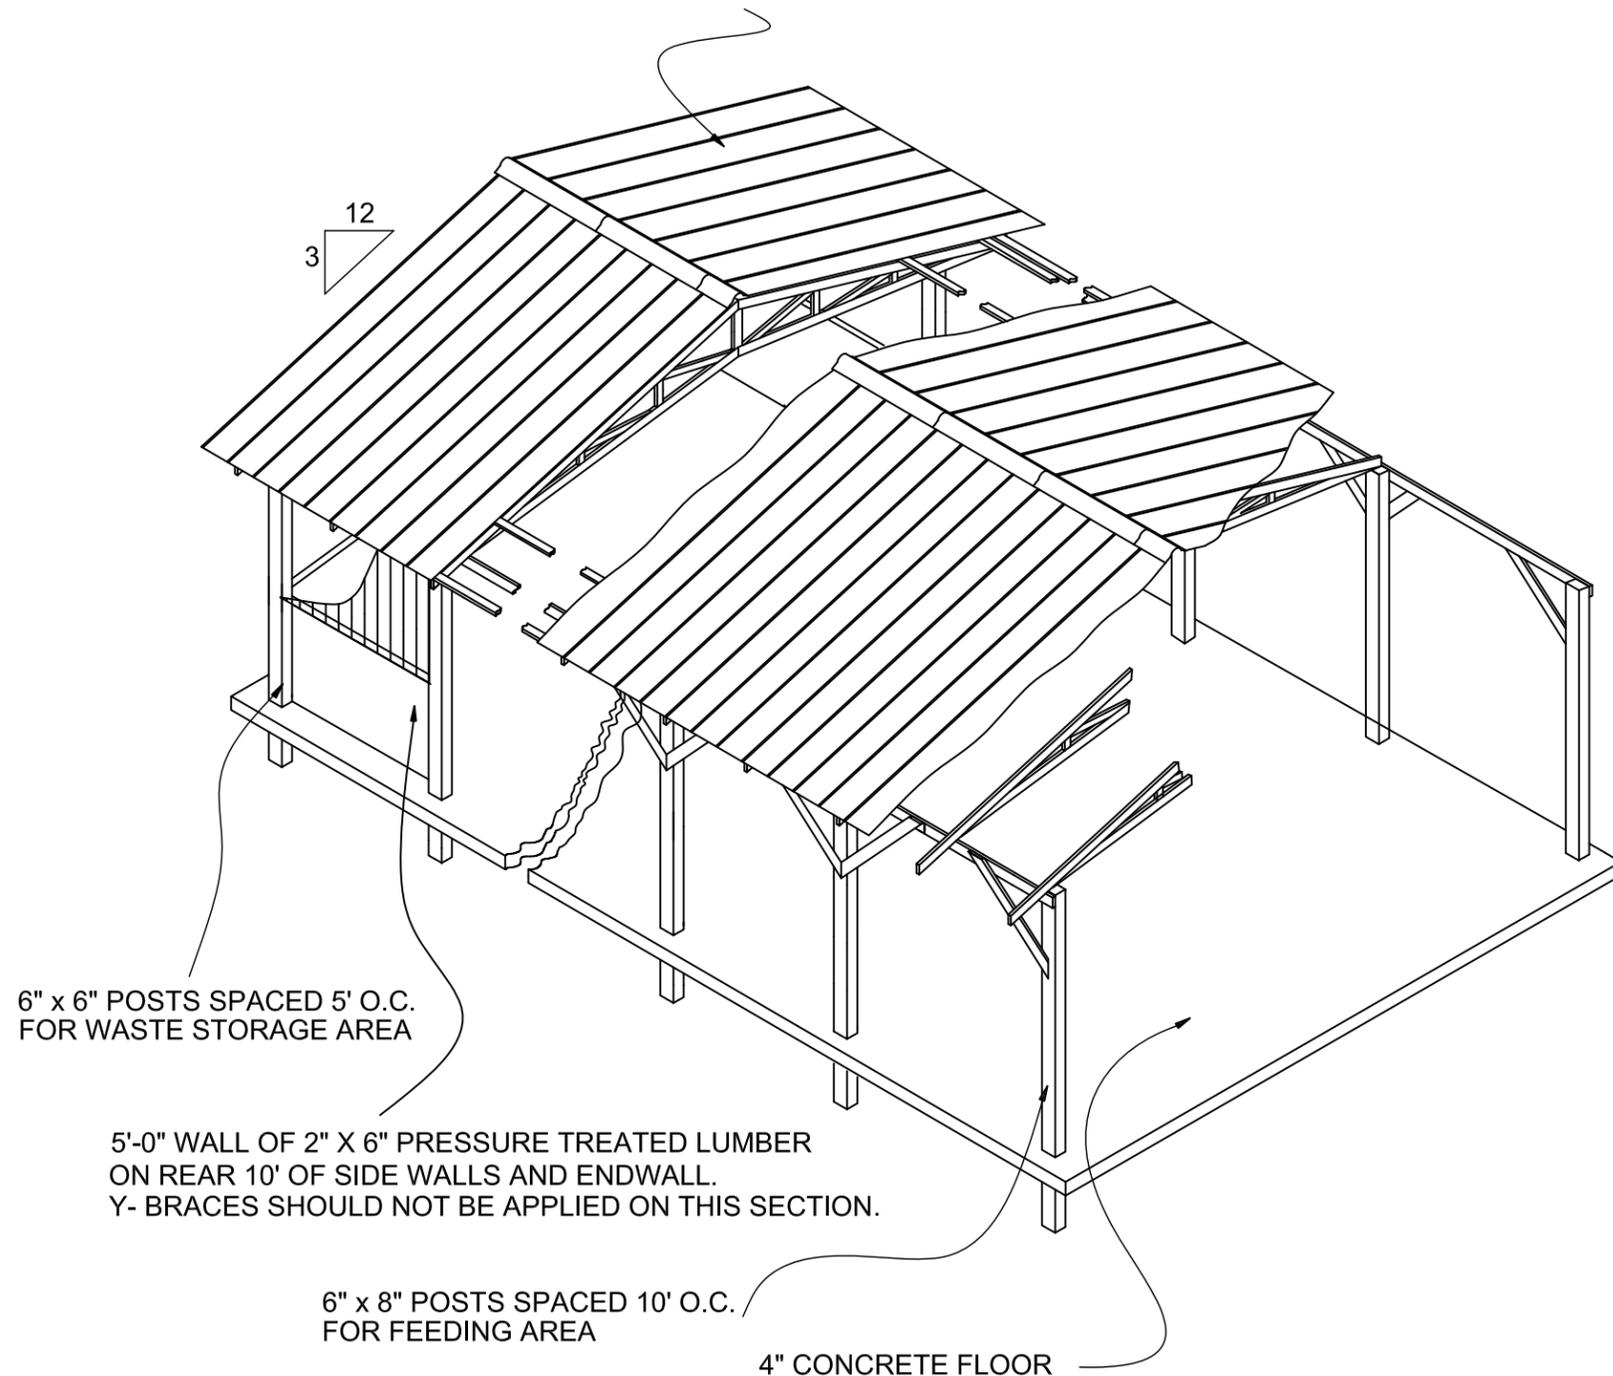


**ISOMETRIC VIEW**  
NOT TO SCALE

**NOTES:**

1. ENCLOSE BOTH GABLE ENDS.
2. ALL ENTRANCE AREAS SHOULD BE STABILIZED USING PRACTICE STANDARD 561 - HEAVY USE AREA.
3. ALL POSTS SHALL BE SET IN CONCRETE WITH A CONCRETE FOOTING PAD (SEE CONCRETE POST FOOTING DETAIL ON SHEET 4).
4. THE BUILDING SITE SHALL BE CLEARED AND GRUBBED AS REQUIRED. PROPER DRAINAGE SHALL BE PROVIDED AROUND THE ENTIRE BUILDING SO THAT RUNOFF WATER DOES NOT ENTER OR POND NEAR BUILDING. DESIGN FOR ROOF RUNOFF IN ACCORDANCE WITH PRACTICE CODE 558 - ROOF RUNOFF MANAGEMENT OR STABILIZE SOIL AROUND BUILDING USING PRACTICE CODE 342 - CRITICAL AREA PLANTING.
5. CONCRETE FLOORS AND FOOTINGS SHALL BE PLACED ON FIRM SOIL. ALL LOOSE SOIL SHALL BE REMOVED. IF FILL MATERIAL IS USED, PLACE IN 9" THICK LAYERS AND COMPACT WITH SHEEPSFOOT ROLLER OR OTHER EQUIVALENT COMPACTION METHOD.
6. TRUSSES AND MANUFACTURED BEAMS SHALL BE DESIGNED BY A PROFESSIONAL ENGINEER LICENSED IN GEORGIA AND WILL BE INSTALLED AS DESIGNED. DESIGNS STAMPED BY PROFESSIONAL ENGINEER SHALL BE PROVIDED TO NRCS FOR REVIEW.
7. ALL LUMBER, INCLUDING THE POSTS, IN CONTACT WITH LITTER OR CONCRETE SHALL BE PRESSURE TREATED (SEE WOOD TREATMENT TABLE ON SHEET 5).
8. ALL DIMENSION LUMBER SHALL BE SOUTHERN PINE NO. 2 OR BETTER.
9. ALL NAILS, BOLTS, AND OTHER CONNECTORS SHALL BE OF HOT-DIPPED ZINC COATED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE, OR COPPER. NAILS SHALL HAVE SPIRAL OR RINGED (ANNULAR) SHANKS. ALL REFERENCES TO "GALVANIZED" IN THIS SET OF DRAWINGS REFERS TO THE ABOVE LISTED COATINGS.
10. POWER SUPPLY TO THE BUILDING IS RECOMMENDED FOR NIGHT OPERATIONS AND REPAIR WORK.
11. ALL DISTURBED AREAS SHALL BE VEGETATED USING PRACTICE CODE 342 - CRITICAL AREA PLANTING.
12. ROOFING SHALL BE 29 GAUGE GALVANIZED METAL. SEALANT SHALL BE APPLIED TO ALL LAPS.
13. CALL BEFORE YOU DIG: 1-800-282-7411 OR 770-623-4344.

Date	09/05
Designed	B KIMSEY W BROWN
Drawn	W BROWN S GOSS
Checked	H MCFARLAND B KIMSEY
Approved	H MCFARLAND

**GEORGIA WINTER FEEDER**  
**80 HEAD**  
 (12' Walls, 6"x8" Posts Spaced 10' o.c.)

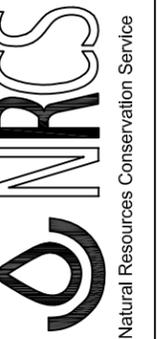

File Name  
ga-eng-313-wf3

Drawing Name  
Isometric

REVISIONS		
DATE	APPROVED	TITLE

Designed	B KIMSEY	Date	09/05
Drawn	W BROWN		
Checked	S GOSS		10/05
Approved	H MCFARLAND		10/05
	B KIMSEY		10/05
	H MCFARLAND		10/05


**GEORGIA WINTER FEEDER**  
**80 HEAD**  
 (12' Walls, 6"x8" Posts Spaced 10' o.c.)



File Name	ga-eng-313-wf3
Drawing Name	Plan
Sheet	3 of 6

29 GAUGE CORRUGATED GALVANIZED SHEET METAL SIDING OR EQUIVALENT (BOTH SIDES). TO IMPROVE AIR CIRCULATION, A 2.0 FT. OPENING SHALL BE INSTALLED BETWEEN THE SIDING AND ROOF OVERHANG.

5'-0" WALL CONSTRUCTED OF PRESSURE TREATED 2" x 6" LUMBER ON BACK 15' OF SIDE WALLS AND ACROSS ENDWALL.

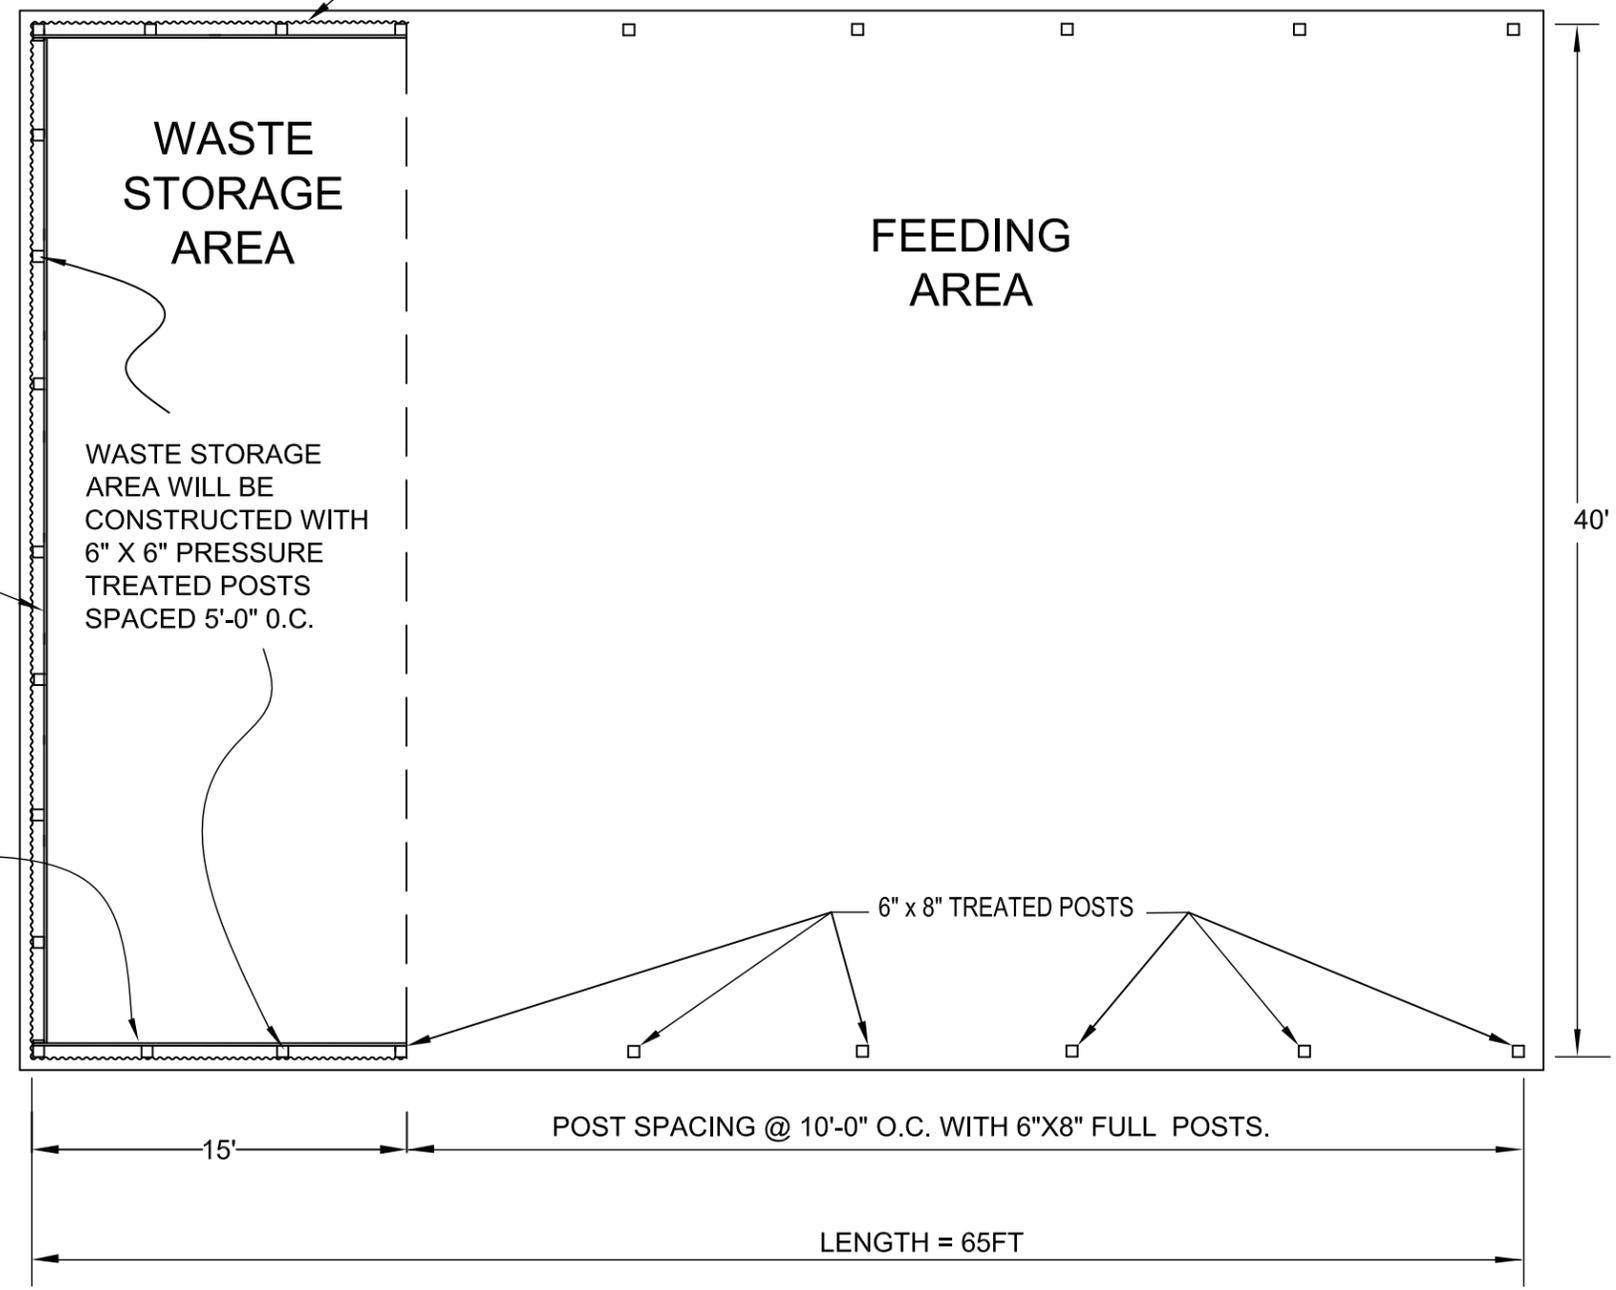

WASTE STORAGE AREA WILL BE CONSTRUCTED WITH 6" X 6" PRESSURE TREATED POSTS SPACED 5'-0" O.C.

6" x 8" TREATED POSTS

POST SPACING @ 10'-0" O.C. WITH 6"X8" FULL POSTS.

LENGTH = 65FT


CONCRETE QUANTITY:  
 (1) FLOOR : 34.74 CY  
 (2) POST HOLES : 20.38 CY

**PLAN VIEW**  
 NOT TO SCALE


**NOTES:**

1. ALL POSTS WILL EXTEND INTO THE GROUND A MINIMUM OF 3'-8" AS SHOWN IN THE POSTHOLE DETAIL ON SHEET 4
2. FIBER-REINFORCED CLASS 3000 CONCRETE @ RATE OF 1.5 LB FIBER PER CUBIC YARD OF CONCRETE SHALL BE APPLIED TO FEEDING AND WASTE STORAGE AREA.

REVISIONS		
DATE	APPROVED	TITLE

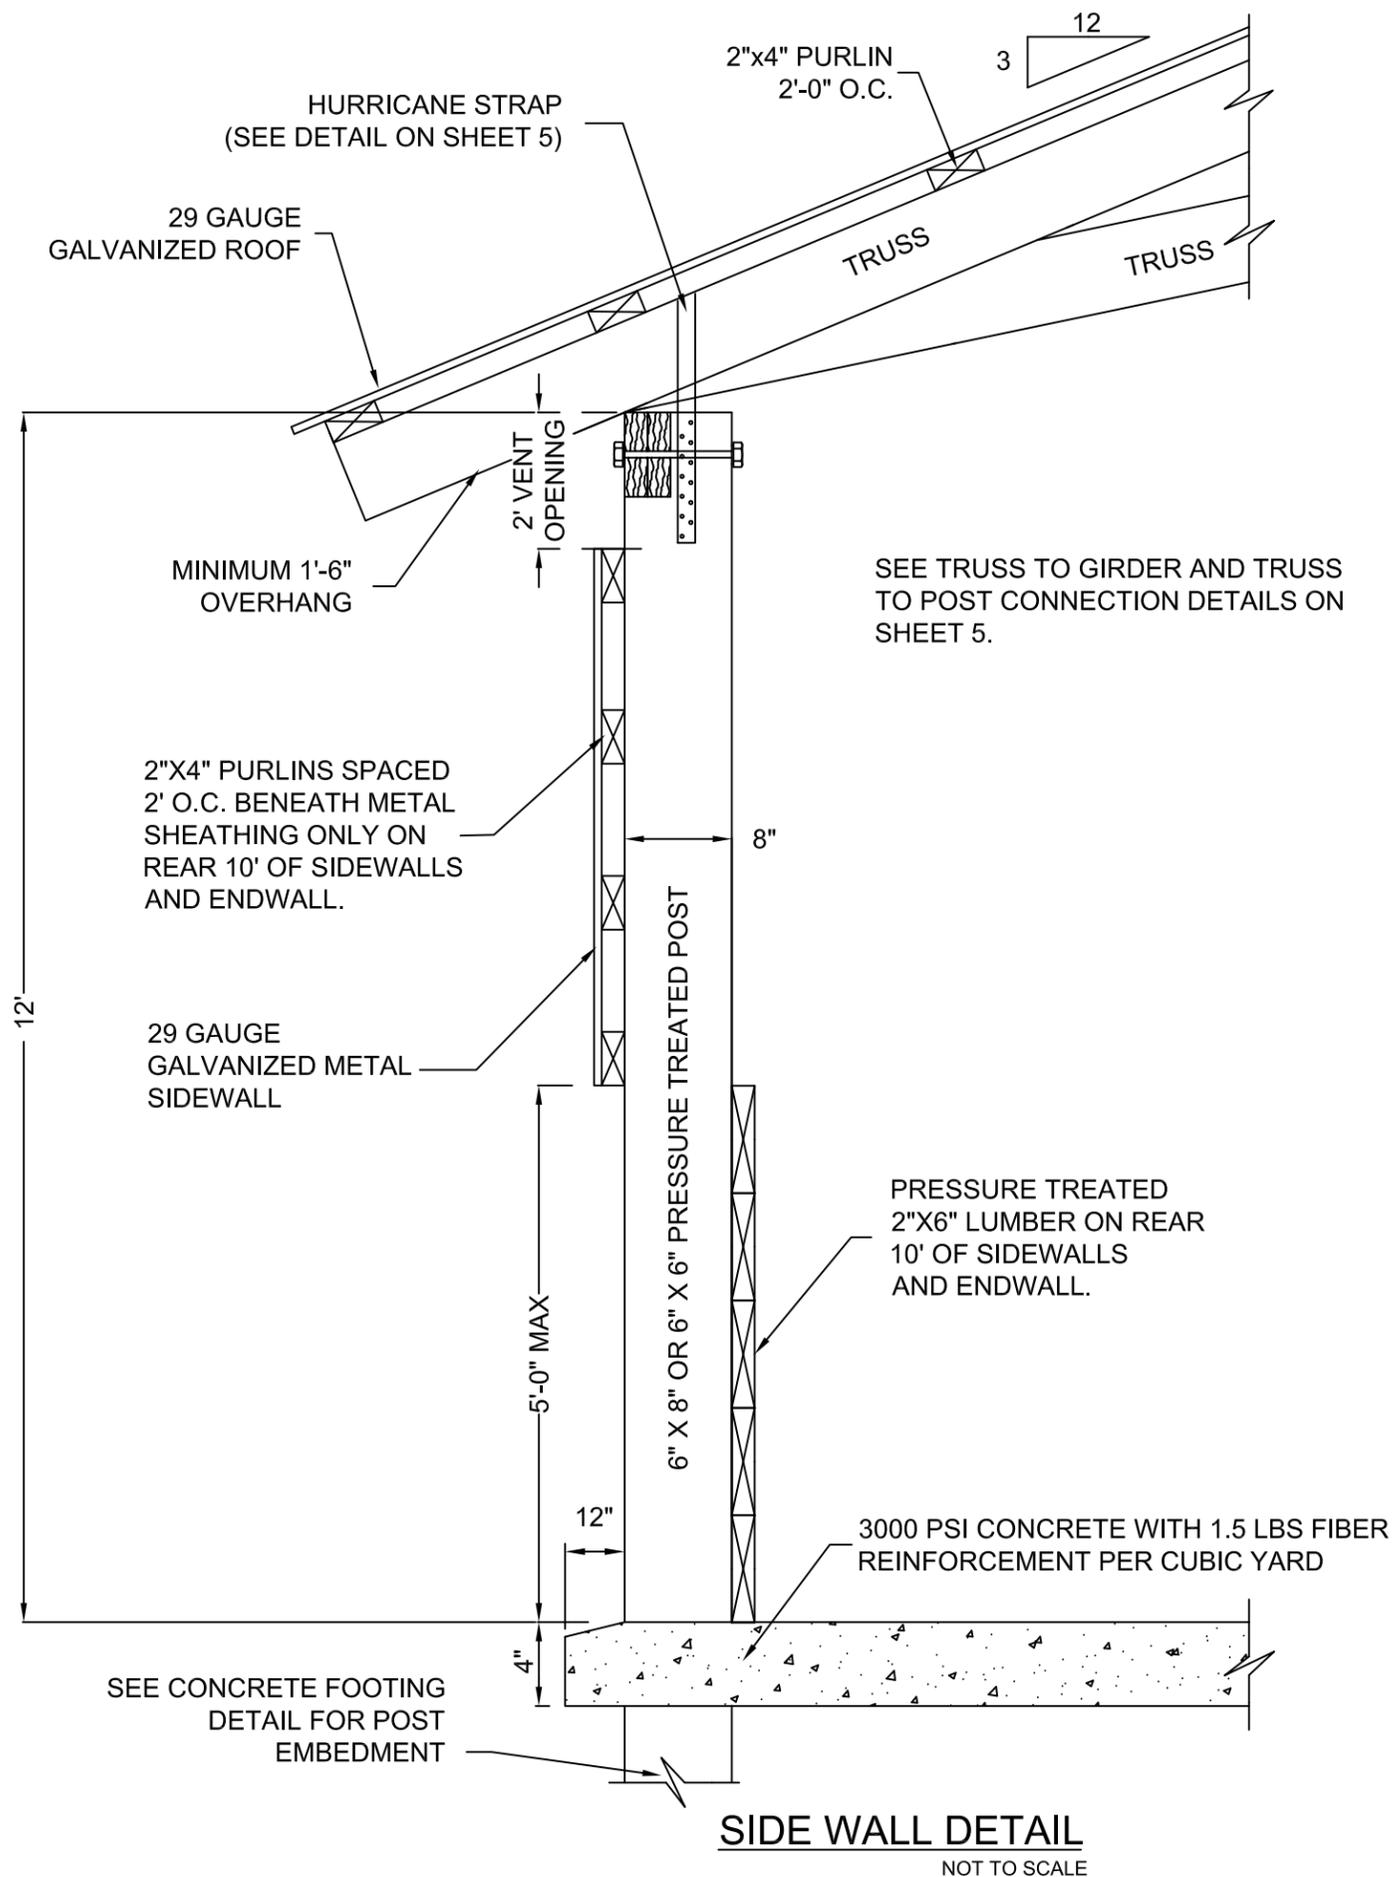

**SIDE WALL DETAIL**  
NOT TO SCALE

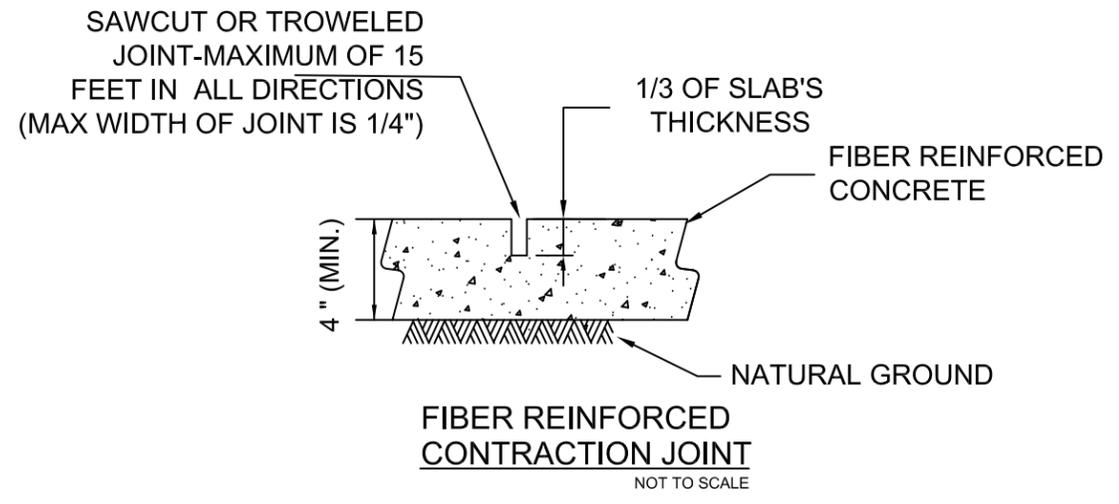


**FIBER REINFORCED CONTRACTION JOINT**  
NOT TO SCALE



- NOTES:**
1. EXAMPLE CONNECTOR SHOWN AT LEFT.
  2. MINIMUM UPLIFT RESISTANCE REQUIRED IS 3100 LB.
  3. INSTALL ACCORDING TO MANUFACTURER'S SPECIFICATIONS.


**MECHANICAL POST ANCHOR DETAIL**  
NOT TO SCALE

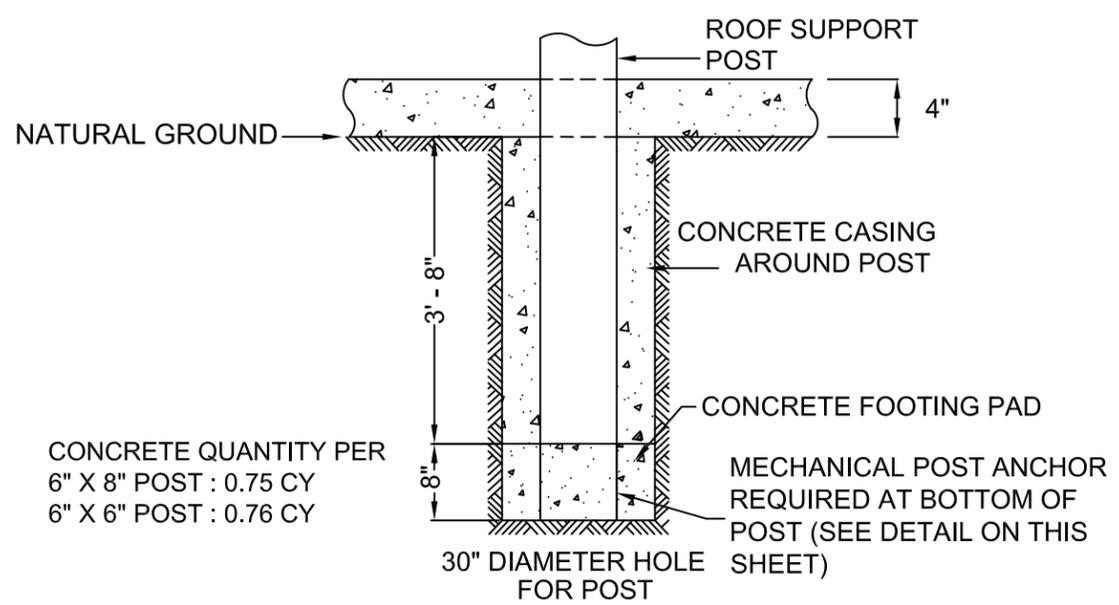

**CONCRETE POST FOOTING DETAIL**  
NOT TO SCALE

Date	09/05
Designed	B KIMSEY
Drawn	W BROWN
Checked	S GOSS
Approved	H MCFARLAND
	10/05
	10/05
	10/05


**GEORGIA WINTER FEEDER**  
**80 HEAD**  
(12' Walls, 6"x8" Posts Spaced 10' o.c.)

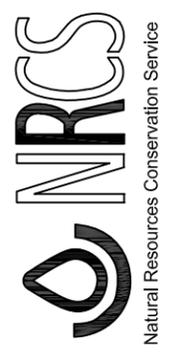


File Name  
ga-eng-313-wf3

Drawing Name  
Sidewall

REVISIONS		
DATE	APPROVED	TITLE

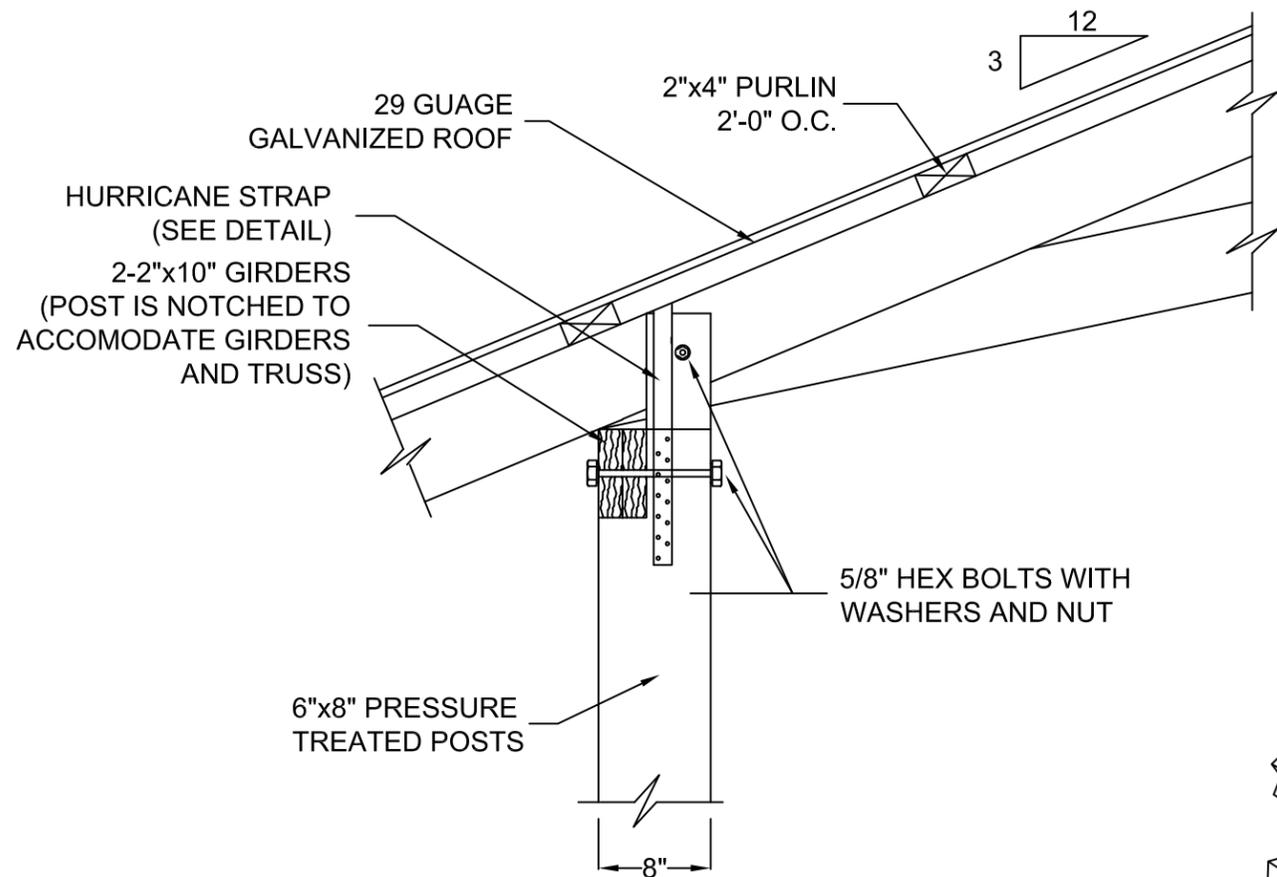

**TRUSS TO POST CONNECTION DETAIL**  
NOT TO SCALE

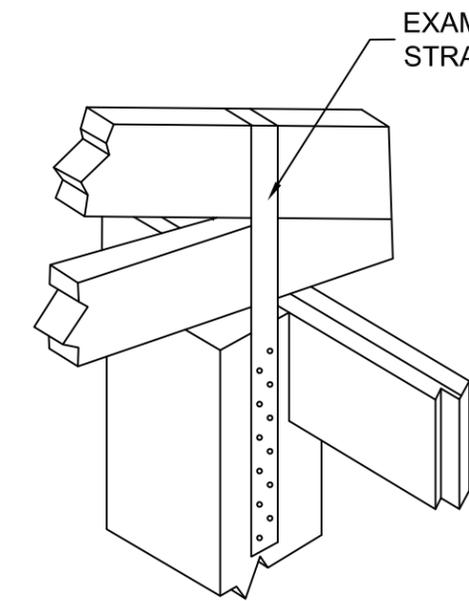


**HURRICANE STRAP**  
NOT TO SCALE


**NOTES:**

1. USE HURRICANE STRAP AT POST TO TRUSS CONNECTION AS SHOWN AT LEFT WITH MINIMUM UPLIFT RESISTANCE OF 2068 LBS.
2. USE MANUFACTURED HURRICANE STRAPS AT TRUSS TO GIRDER CONNECTIONS AS SHOWN AT RIGHT WITH MINIMUM UPLIFT RESISTANCE OF 821 LBS.
3. MANUFACTURER'S SPECIFICATIONS SHALL BE PROVIDED TO NRCS.
4. INSTALL STRAPS ACCORDING TO MANUFACTURER'S SPECIFICATIONS.


NOTE: ALL BOLTS AND NAILS ARE GALVANIZED.

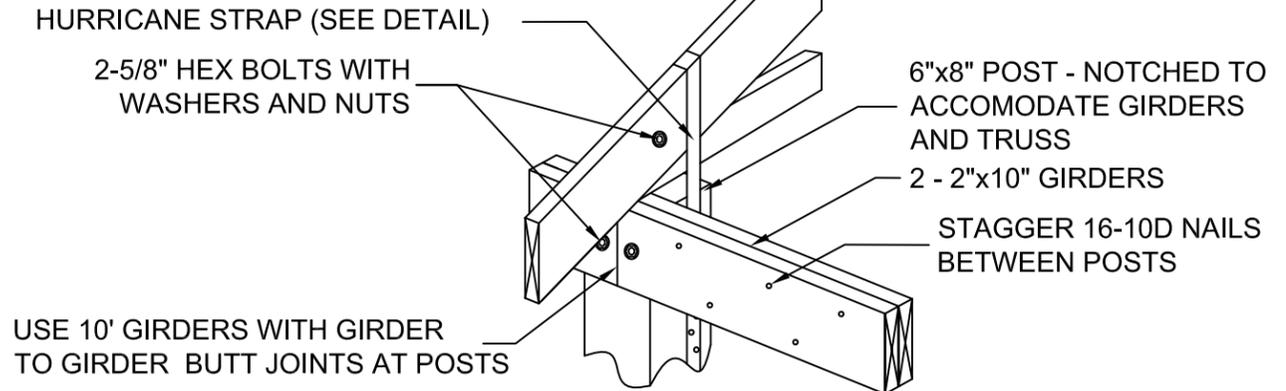

**TRUSS TO GIRDER CONNECTION (WITH POST)**  
NOT TO SCALE

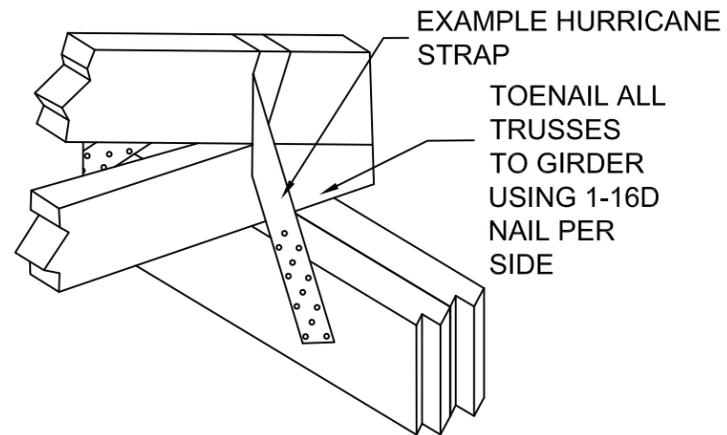

**TRUSS TO GIRDER CONNECTION (WITHOUT POST)**  
NOT TO SCALE

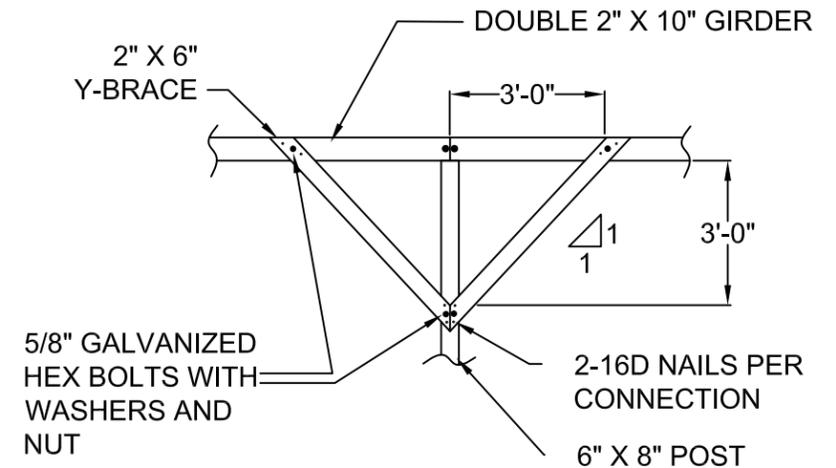

**Y - BRACING (USED ON 6x8 POSTS)**  
NOT TO SCALE

**WOOD TREATMENT TABLE**

USE	MINIMUM RETENTION RATES IN PCF				
	CCA	ACQ-C/D	CBA-A	CA-B	MCA
GROUND CONTACT OR FRESH WATER	0.40	0.40	0.41	0.21	0.15
IMPORTANT STRUCTURAL MEMBERS	0.60	0.60	0.61	0.31	0.23

CCA - CHROMATED COPPER ARSENATE  
 ACQ-C/D - ALKALINE COPPER QUATERNARY  
 CBA-A & CA-B - COPPER AZOLE  
 MCA - MICRONIZED COPPER AZOLE

**NOTES:**

1. ALL WOODEN WALLS, HALF POSTS, AND BIN FRONT WOOD SHALL MEET THE GROUND CONTACT RATES.
2. ALL SUPPORT POSTS SHALL MEET THE IMPORTANT STRUCTURAL MEMBER RATES.

Date	Designed	Drawn	Checked	Approved
09/05	B. KIMSEY	W. BROWN	S. GOSS	H. MCFARLAND
10/05			H. MCFARLAND	
10/05			B. KIMSEY	
10/05			H. MCFARLAND	

**GEORGIA WINTER FEEDER**  
**80 HEAD**  
 (12' Walls, 6"x8" Posts Spaced 10' o.c.)



File Name  
ga-eng-313-wf3\_rev 102010

Drawing Name  
Details


REVISIONS		
DATE	APPROVED	TITLE
10/2010	J. HOLLOWAY	STATE ENGINEER

10/29/2010 2:41 PM

Sheet 5 of 6

Date	09/05
Designed	B. KIMSEY W. BROWN
Drawn	W. BROWN S. GOSS
Checked	H. MCFARLAND B. KIMSEY
Approved	H. MCFARLAND

**GEORGIA WINTER FEEDER**  
**80 HEAD**  
(12' Walls, 6"x8" Posts Spaced 10' o.c.)

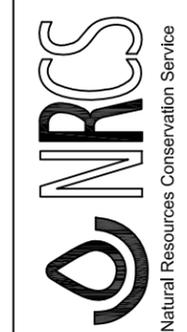


File Name  
ga-eng-313-wf3

Drawing Name  
Bracing

**NOTE:**

- BRACING REQUIREMENTS SHOWN ON THIS PAGE ARE THE MINIMUM REQUIRED BY NRCS.
- BRACING SHALL BE INSTALLED AS THE TRUSSES ARE ERECTED.
- UNLESS SPECIFIED OTHERWISE, ALL BRACING SHALL CONSIST OF 2" X 4" STRESS-GRADED LUMBER CONNECTED WITH TWO 16D DEFORMED SHANK NAILS TO EACH TRUSS MEMBER THE BRACE CROSSES.
- EXCEPT FOR TOP CHORD BRACING, ALL CONTINUOUS AND DIAGONAL BRACING SPLICES SHALL OVERLAP BETWEEN TWO TRUSSES (SEE WEB MEMBER BRACING DETAIL BELOW).
- ADDITIONAL TEMPORARY BRACING REQUIRED BY THE CONTRACTOR DURING CONSTRUCTION SHALL BE REMOVED WHEN CONSTRUCTION IS COMPLETE.
- CONTACT YOUR AREA ENGINEER IF YOU HAVE ANY QUESTIONS REGARDING TRUSS BRACING.

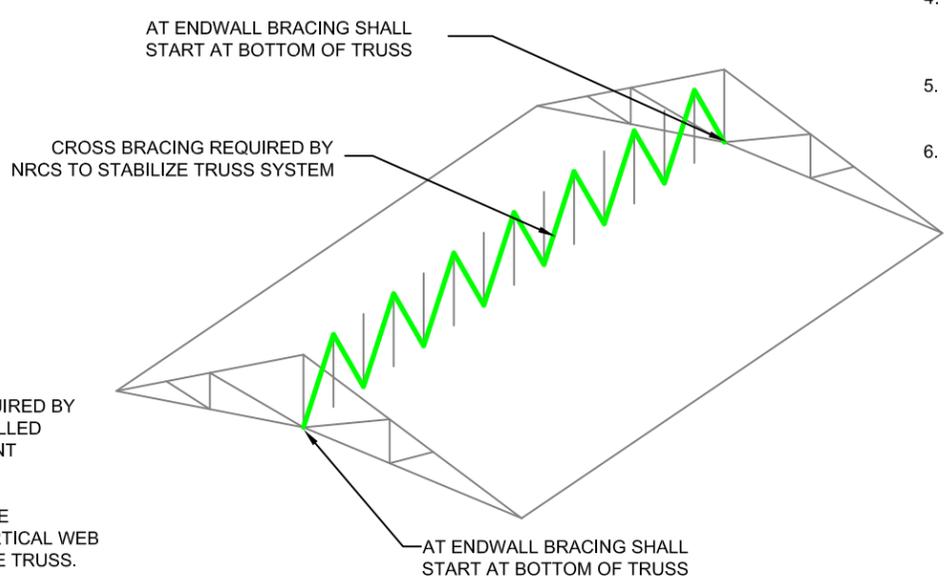


**ISOMETRIC VIEW OF VERTICAL CROSS BRACING**

**NOTE:**


- CROSS BRACING (REQUIRED BY NRCS) SHALL BE INSTALLED BETWEEN ALL ADJACENT TRUSSES.
- THIS BRACING SHALL BE ATTACHED TO THE VERTICAL WEB AT THE CENTER OF THE TRUSS.
- IF THERE IS NO VERTICAL WEB AT THE CENTER OF THE TRUSS THEN BLOCKING SHALL BE ADDED AS NECESSARY TO INSTALL THE BRACE.

**NOTE:**

- BOTTOM CHORD BRACING IS NORMALLY SPECIFIED BY THE TRUSS DESIGNER ON THE TRUSS DESIGN DRAWING.
- THE MINIMUM BOTTOM CHORD BRACING REQUIRED BY NRCS SHALL CONSIST OF THREE EQUALLY SPACED CONTINUOUS LATERAL BRACES.
- LATERAL BRACING SHALL BE REINFORCED WITH DIAGONAL BRACING EVERY 20 FEET AS SHOWN. THIS IS AN NRCS REQUIREMENT AND WILL NOT BE SHOWN ON THE TRUSS DESIGN DRAWING.

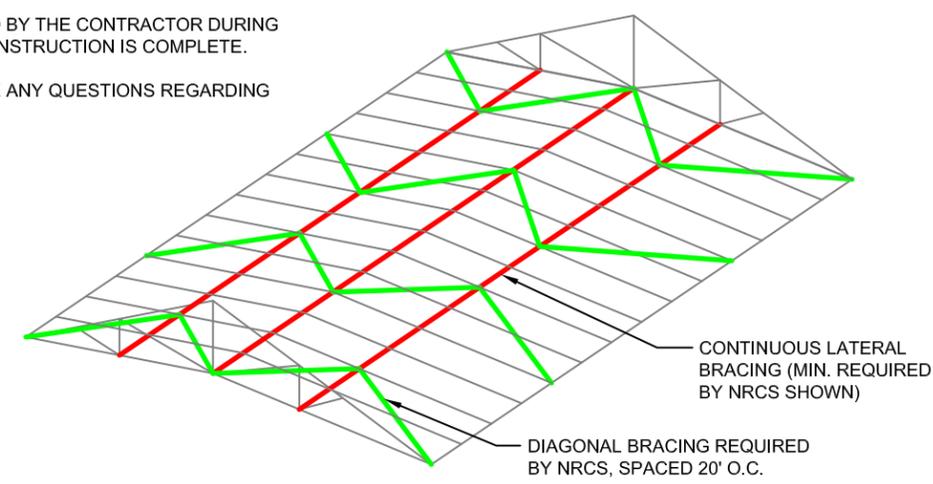

**ISOMETRIC VIEW OF BOTTOM CHORD BRACING**

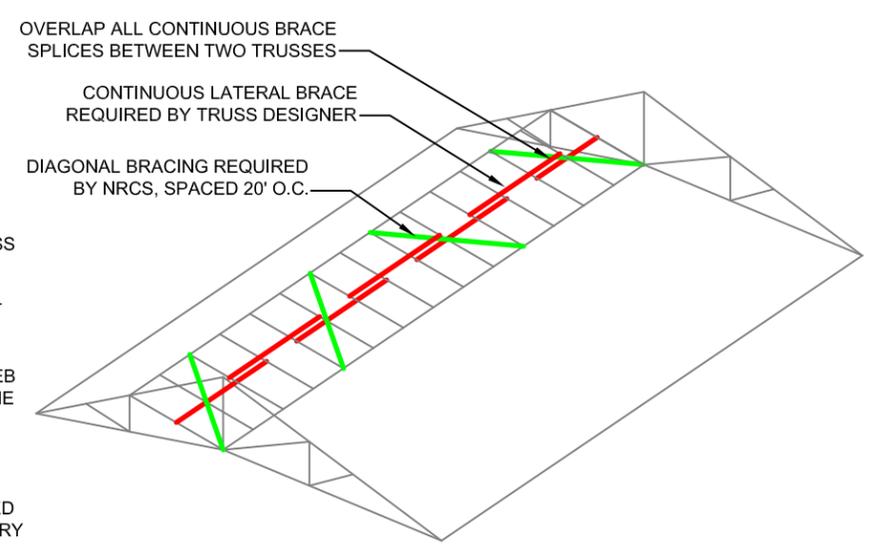


**ISOMETRIC VIEW OF WEB MEMBER BRACING**

**NOTE:**

- WEB MEMBER BRACING SHALL CONSIST OF BRACING AS SPECIFIED BY THE TRUSS MANUFACTURER ON THE TRUSS DESIGN DRAWING.
- NORMALLY THIS WILL CONSIST OF CONTINUOUS LATERAL BRACES INSTALLED AT THE CENTER OF COMPRESSION WEB MEMBERS. IN SOME CASES THE BRACING MAY CONSIST OF "L" OR "T" SCAB BRACING.
- ALL CONTINUOUS LATERAL BRACES SHALL BE REINFORCED WITH DIAGONAL BRACING EVERY 20 FEET AS SHOWN. THIS IS AN NRCS REQUIREMENT AND WILL NOT BE SHOWN ON THE TRUSS DESIGN DRAWING.

**NOTE:**

- TOP CHORD BRACING SHALL CONSIST OF 2" X 4" PURLINS (SOUTHERN PINE #2 OR BETTER) SPACED 2' O.C. AS SHOWN ON SHEET 4.
- TEMPORARY DIAGONAL BRACING SHALL ALSO BE REQUIRED IF ROOFING IS NOT INSTALLED IMMEDIATELY OVER THE PURLINS.

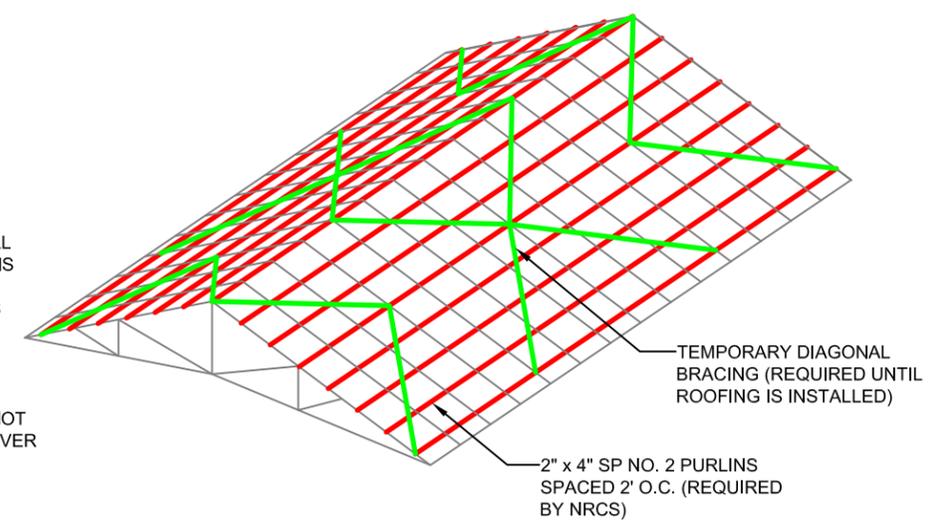

**ISOMETRIC VIEW OF TOP CHORD BRACING**

REVISIONS		
DATE	APPROVED	TITLE