



Wood Duck Nesting Boxes

Alabama Guide Sheet No. AL645F



Twenty-six species of ducks are found in the coastal and inland waters of Alabama. The wood duck is a resident species found statewide throughout the year. When natural cavities are scarce or absent, wood ducks may not reproduce successfully. They readily accept and nest in nest boxes that can provide safer nesting than natural cavities because they provide predator guards.


A wood duck nest box should be constructed of unplanned cedar, cypress, or other weather-resistant lumber. It should *NEVER* be constructed from treated, painted, stained, or creosoted lumber. The following diagrams illustrate the proper dimensions. The entrance hole should be oval shaped with the broadest distance horizontal. On the inside front of the box, beneath the hole, tack a strip of screen or hardware cloth to provide the ducklings a means of escaping the box. A predator guard should always be placed at least 36 in. above the water line.

Materials


25 nails, 8 or 10 penny, zinc coated
 1 spike, 4+ inches
 1 lag bolt, ¼ in., 6 in. long
 1 hinge, 3 in. cabinet + screws
 18 in. strip of hardware cloth at least 3 in. wide.
 4 in. x 4 in. post, 16 ft. long (cypress, cedar or preservative treated wood)
 Sawdust or woodchips to form a 3 in. nest base in each box

Estimated Cost: less than \$25.00

Installation

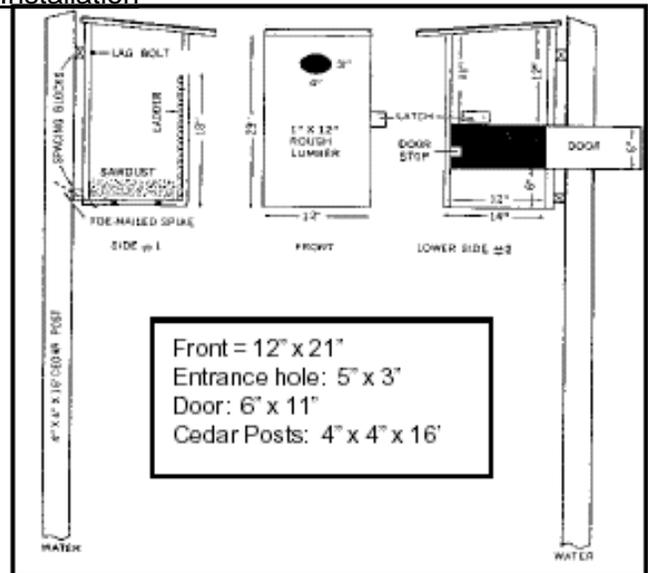


- Use rust proof screws or nails that are long enough to hold securely despite rough handling and weathering.
- Bore four ¼ in. drainage holes through the floor.
- Tack a strip of ¼ in. mesh hardware cloth cut 18 in. x 3 in. from the bottom of the box to the hole. This is necessary for the ducklings to be able to climb out the nest.
- Spray the inside of the box with Lysol or other disinfectant prior to the nesting season to discourage wasp and bees.

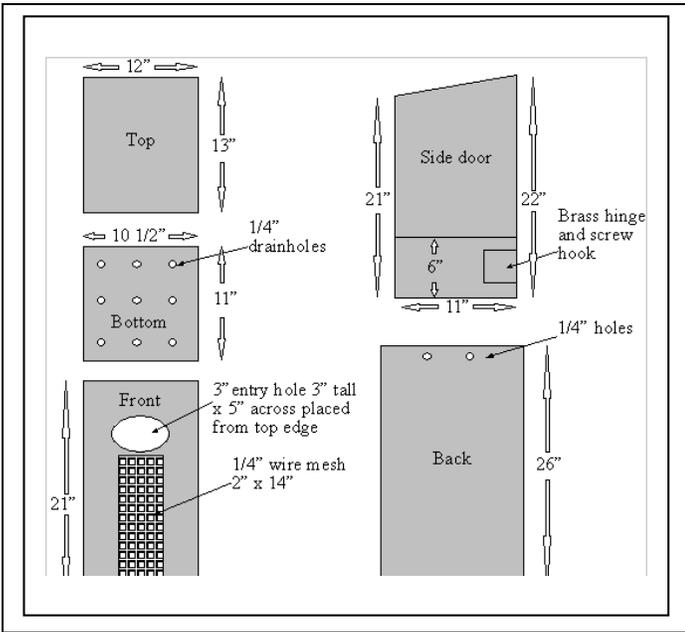

Precautions should be taken to prevent nest disturbance.

Entrance Hole Dimensions

It is important to make the entrance hole large enough to accommodate the largest cavity nesters that are found in the area. An oval entrance of 3 in. by 5 in. will accommodate wood ducks and hooded mergansers.

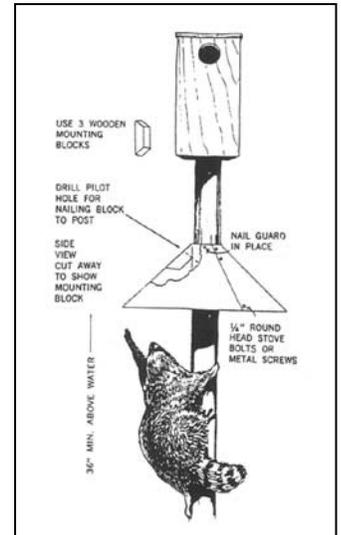


Predator Guard

Materials


- 3 ft. x 8 ft. piece sheet of 26-gauge sheet metal
- 3 wood mounting blocks
- 2 stove bolts or metal screws
- 6 nails

Installation

When installing the guard, overlap the cut edge to the dotted line. Make circular cuts in a clockwise direction. These type of predator guards work best on posts with a diameter of up to 6 inches. The guard is secured to the post with wooden mounting blocks and galvanized nails. The lower edge of the cone should be at least 36 in. above the water.

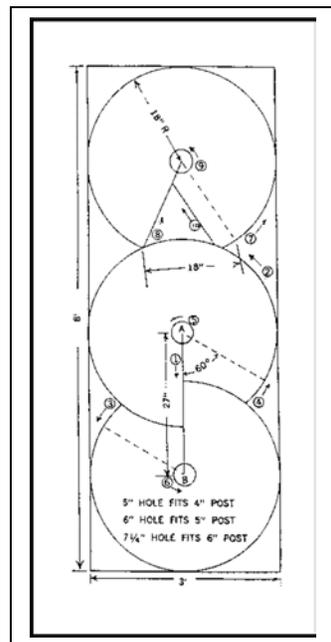

Raccoons and many snake species are responsible for the destruction of many duck nests in natural cavities and nest boxes. Proper

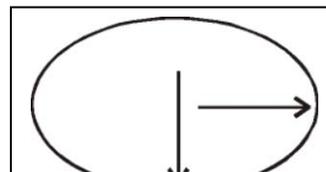

The United States Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, gender, religion, age, disability, political beliefs, sexual orientation, and marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact the USDA's TARGET Center at (202) 720-2600 (voice and TDD).

To file a complaint of discrimination, write the USDA, Director, Office of Civil Rights, Room 326W, Whitten Building, 14th and Independence Avenue, SW, Washington, D.C. 20250-9410 or call (202)720-5964 (voice or TDD). USDA is an equal opportunity provider and employer. 2/2012