


Landowner

Location

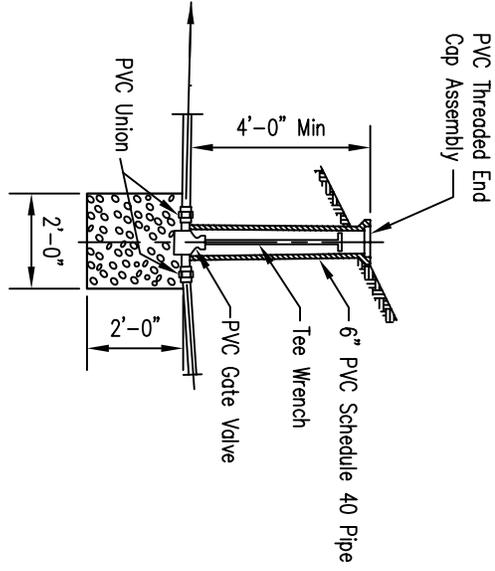

**DETAIL A**  
GRAVEL DRAIN

**BILL OF MATERIAL**

QUANTITY	ITEM	LENGTH
1	2" PVC Schedule 40 Pipe	
1	2" PVC End Cap	
1	2" PVC 90 Degree Elbow	
2	2" PVC Female Union	
1	6" PVC Schedule 40 Pipe	
1	6" PVC Threaded End Cap Assembly	
1	2" PVC Gate Valve	
1	Tee Handle Wrench	
	24" Perforated Corrugated Plastic Tubing (CPT)	
	Rubber Anti-Seep Collars	
	PVC Cement (Joints)	
	Pit Run Sand And Gravel (Drain)	0.34 Cu. Yd.
	Coarse Gravel Mix (Collector)	
	Concrete (Base)	0.2 Cu. Yds.
	Marking Post (Optional)	

Drawing adapted from Illinois



**POND DEWATERING SYSTEM**