## CONSTRUCTION NOTES

### GENERAL NOTES

- 1. ALL ITEMS SHALL BE CONSTRUCTED TO THE DIMENSIONS AND ELEVATIONS SHOWN ON THE DRAWINGS. ANY CHANGES SHALL BE APPROVED BY THE NRCS REPRESENTATIVE ON SITE.
- 2. ALL PERMITS, EASEMENTS, AND RIGHTS OF WAY ARE THE RESPONSIBILITY OF THE LANDOWNER.
- 3. IT IS THE EXCAVATION CONTRACTORS RESPONSIBILITY TO CALL "DIG SAFE" AND TO COMPLY WITH ALL VERMONT LAWS AND REGULATIONS REGARDING THE LOCATION AND WORK AROUND UNDERGROUND UTILITIES. DIG SAFE (888) 344-7233.
- 4. ALL CONSTRUCTION ACTIVITIES SHALL BE DONE IN A MANNER THAT MINIMIZES SEDIMENT FROM ENTERING ANY WATER BODIES, INCLUDING DRAINAGE WAYS, SEE VT D.E.C. SEDIMENT AND EROSION
- 5. CONSTRUCTION MAY NOT BEGIN UNTIL THE CONTRACTOR, LANDOWNER, AND NRCS HAVE A PRE-CONSTRUCTION MEETING IN ORDER TO DISCUSS THE DETAILS OF THE PROJECT.
- 6. IT SHALL BE THE CONTRACTOR'S AND LANDOWNER'S RESPONSIBILITY TO NOTIFY NRCS AT LEAST TWO DAYS IN ADVANCE OF:
  - A. START OF CONSTRUCTION.
  - B. BACKFILL OPERATIONS (NRCS SHALL INSPECT SUBGRADE)

### CONCRETE DISPOSAL NOTES:


- 7. CONCRETED AREAS SHOWN IN THE PLAN VIEW SHALL BE REMOVED AND DISPOSED OF OFF SITE. WASTE CONCRETE SHALL NOT BE PLACED IN ANY WETLAND, WETLAND BUFFER, FLOODPLAIN, OR WATERWAY.
- CONCRETE MAY NOT BE BURIED IN THE WASTE FACILITY CLOSURE PRIOR TO BACKFILL.
- BURIAL OF WASTE CONCRETE IN ALTERNATIVE LOCATIONS MAY REQUIRE ADDITIONAL PERMITS FROM THE VERMONT AGENCY OF AGRICULTURE.

### **EARTHWORK NOTES:**

- 10. ALL SOD, MANURE, & ORGANIC MATTER SHALL BE REMOVED TO REVEAL CLEAN SUBGRADE. ANY TOPSOIL SHOULD BE STRIPPED AND STOCKPILED TO BE USED AS FINISH ON DISTURBED AREAS.
- 11. LIQUID ORGANIC MATTER AND ORGANIC LADEN SOILS SHALL BE LAND APPLIED IN ACCORDANCE WITH THE CURRENT NUTRIENT MANAGEMENT PLAN. SEE DETAILS SHEET.
- 12. FILL SHALL NOT CONTAIN MANURE, VEGETATION, SOD, FROZEN MATERIAL, BRUSH, ROOTS, STONES LARGER THAN 6 INCHES IN DIAMETER, OR OTHER OBJECTIONABLE MATERIAL.
- 13. FILL SHALL NOT BE PLACED ON FROZEN SURFACES.
- 14. FILL SHALL BE PLACED IN UNIFORM LAYERS NOT TO EXCEED 9 INCHES PRIOR TO COMPACTION.
- 15. THE MOISTURE CONTENT OF THE FILL SHALL BE SUFFICIENT TO OBTAIN FIRM COMPACTION.
- 16. COMPACTION SHALL BE ACCOMPLISHED BY THE ROUTING OF CONSTRUCTION EQUIPMENT OVER THE FILL WITH NOT LESS THAN 2 PASSES OF THE CONSTRUCTION EQUIPMENT. ONE "PASS" SHALL BE CONSIDERED SUCH THAT THE ENTIRE SURFACE OF EACH LAYER WILL BE TRAVERSED BY NOT LESS THAN 1 TRACK OF THE CONSTRUCTION EQUIPMENT.
- 17. SITE SHALL BE GRADED TO DRAIN FREELY (NO PONDED WATER WHEN CONSTRUCTION IS COMPLETE). TOPSOIL SHALL BE REPLACED OVER THE CONSTRUCTION AREA UPON COMPLETION OF BACKFILL.
- 18. UNDER NO CIRCUMSTANCES SHALL MATERIAL BE DUMPED IN WETLANDS. FLOODPLAINS, OR WATER CONVEYANCES.

# FINISH WORK NOTES:

19. ALL AREAS DISTURBED BY CONSTRUCTION SHALL BE SEEDED AND MULCHED ACCORDING TO CONSTRUCTION SPECIFICATION #52.

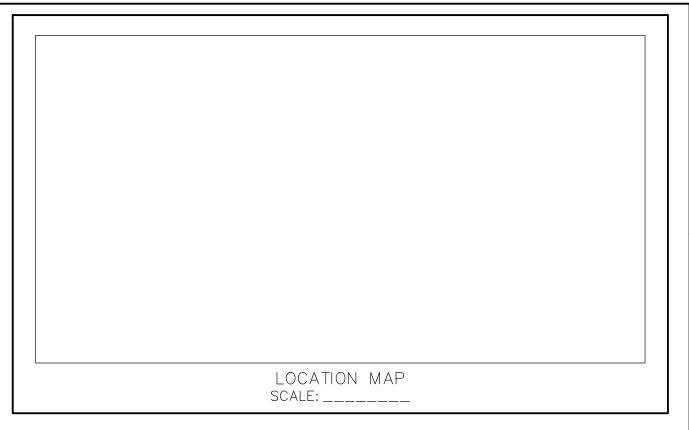

## BILL OF MATERIALS

ITEM #	ITEM	QUANTITY	UNIT	CONSTRUCTION SPECIFICATIONS
1.	SITE PREPARATION	FOR	JOB	1, 5
2.	EARTHWORK - MANURE REMOVAL (SPREADING)		C.Y.	11
3.	EARTHWORK — STRIPPING & STOCKPILING		C.Y.	11
4.	EARTHWORK — BACKFILL		C.Y.	11
5.	SEEDING & MULCHING		ACRE	52




CLASS W 겅 HAZARD LOV


S CLOSURE BILL OF


≽ ≼ FACILI' WASTE STRU

ile Name

Drawing Name VT-360-001-2021

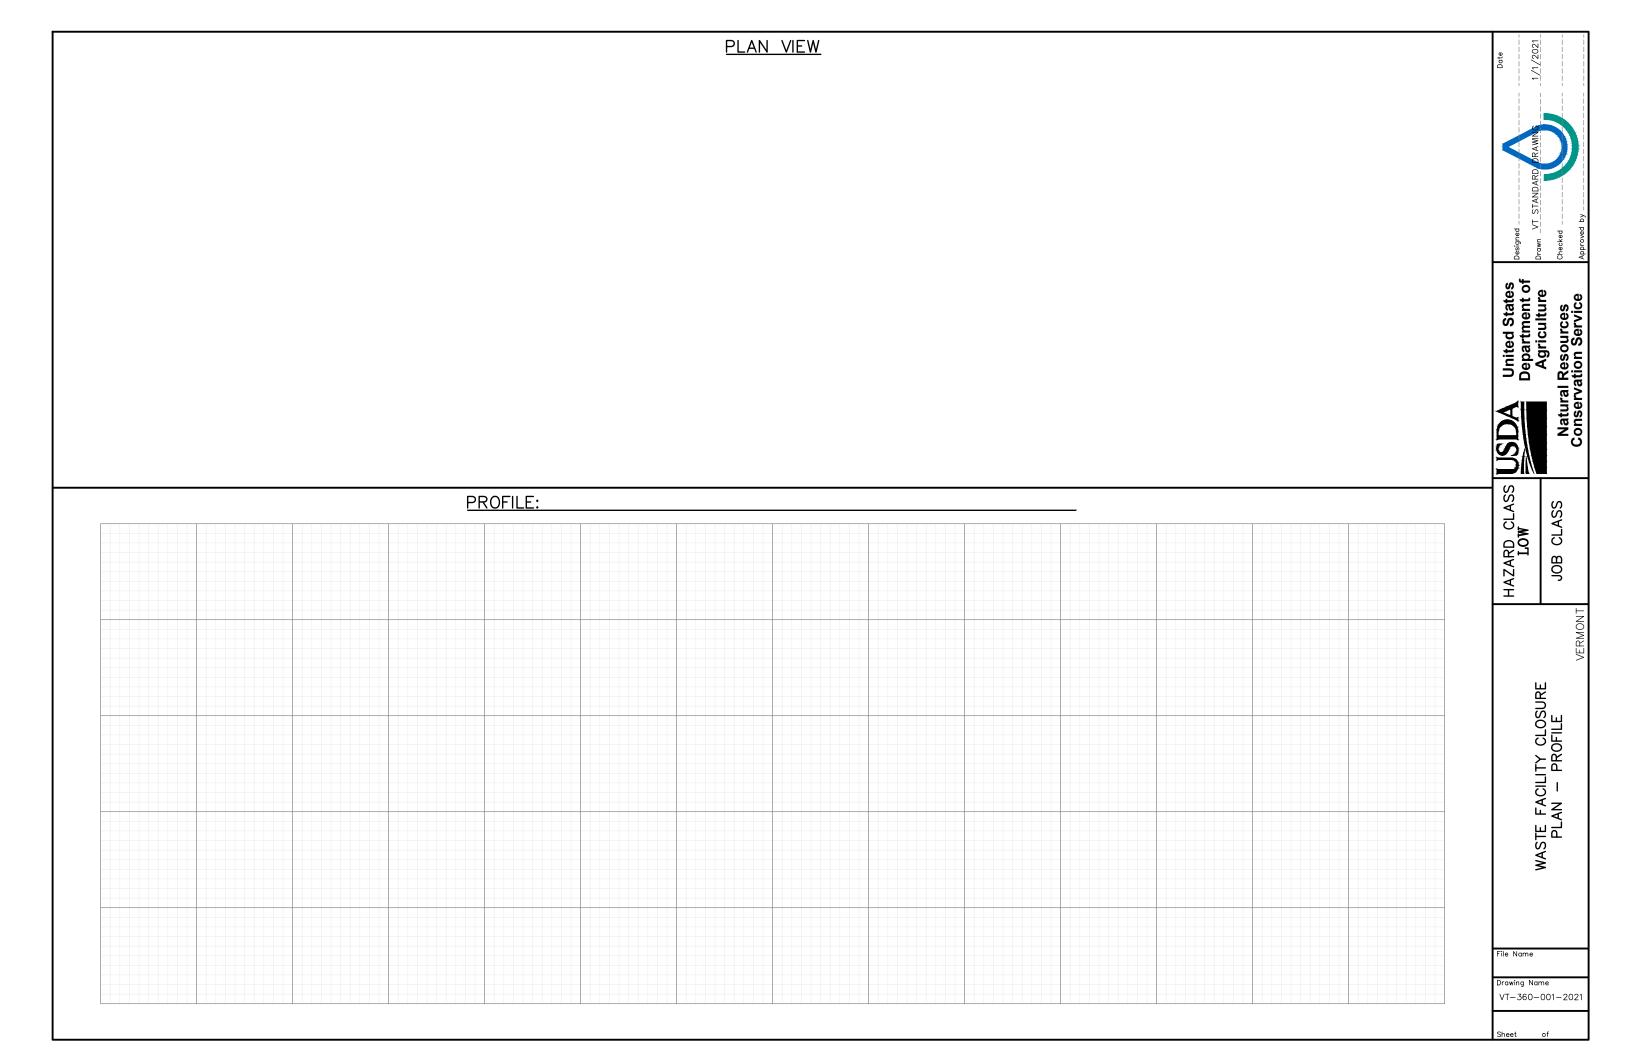

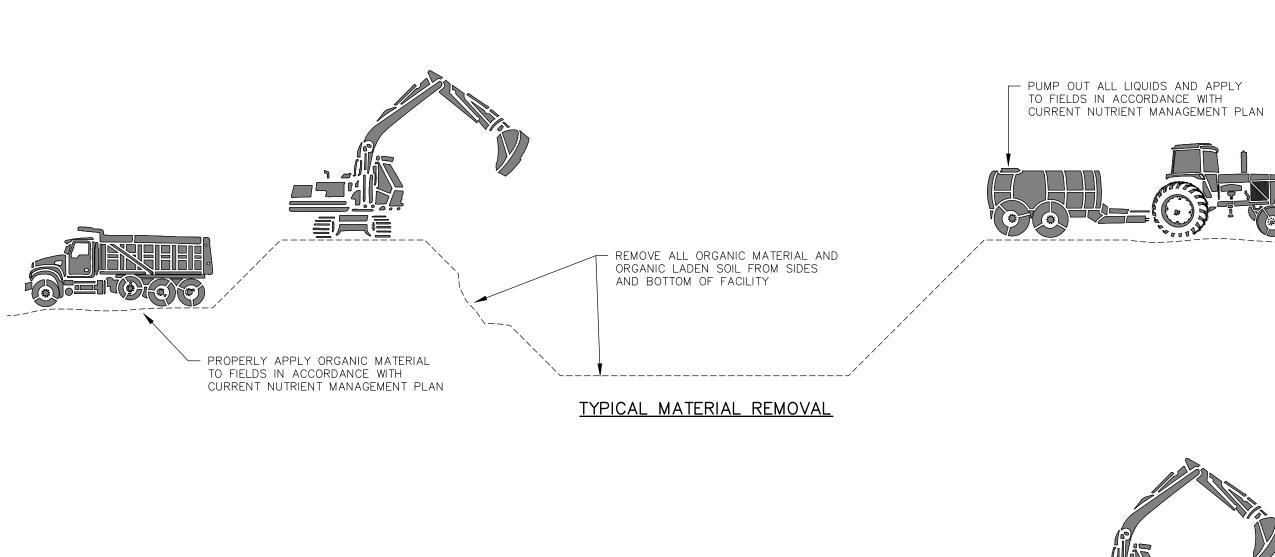

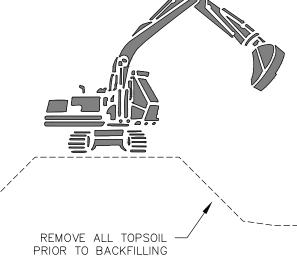



SITE SHALL BE GRADED TO DRAIN FREELY (NO PONDED WATER)

TYPICAL MATERIAL FILLING

WASTE FACILITY CLOSURE SECTION DETAILS

United States Department of Agriculture

HAZARD CLASS LOW

CLASS

JOB

File Name

Drawing Name VT-360-001-2021

heet o