



Two Loops Twisted Of Either A 9-Gauge Smooth Malleable Galvanized Wire, 12-Gauge Double-Stranded Or A 12 1/2-Gauge Galvanized High-tensile Wire. (Refer to Georgia Fence Standard 382) (Typ.)

DOUBLE H-BRACE END POST DETAIL
Not to Scale

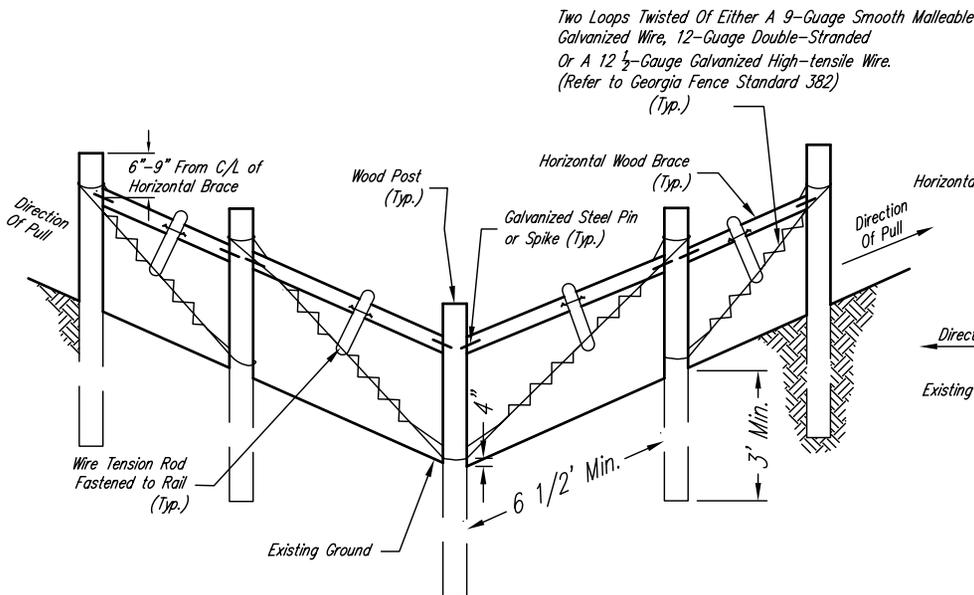

Two Loops Twisted Of Either A 9-Gauge Smooth Malleable Galvanized Wire, 12-Gauge Double-Stranded Or A 12 1/2-Gauge Galvanized High-tensile Wire. (Refer to Georgia Fence Standard 382) (Typ.)

DOUBLE H-BRACE CORNER DETAIL
Not to Scale

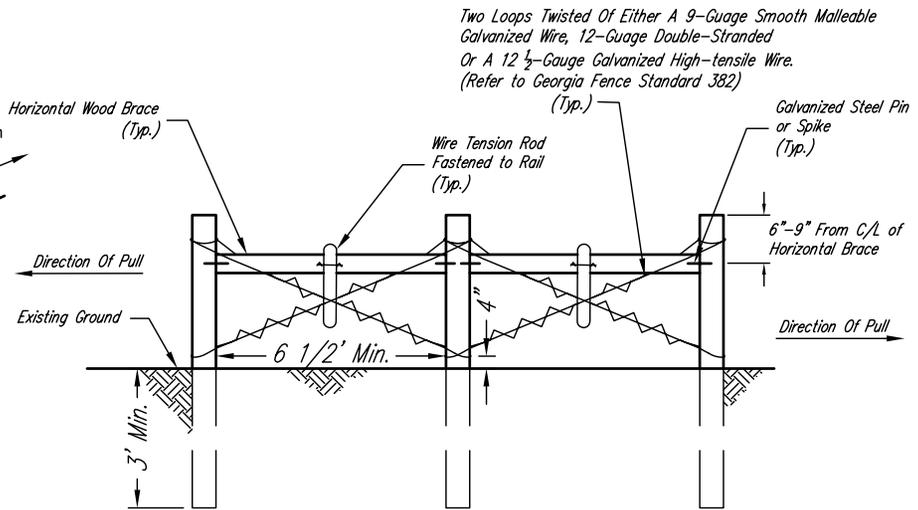

Two Loops Twisted Of Either A 9-Gauge Smooth Malleable Galvanized Wire, 12-Gauge Double-Stranded Or A 12 1/2-Gauge Galvanized High-tensile Wire. (Refer to Georgia Fence Standard 382) (Typ.)

DOUBLE H-BRACE PULL POST DETAIL
Not to Scale

| | |
|--------------|----------------|
| File Name | |
| Drawing Name | |
| Date | |
| Designed | |
| Drawn | |
| Checked | |
| Approved | |
| | 00/00/00 00:00 |
| | Sheet 2 of 3 |

FENCING — GEORGIA
DOUBLE H-BRACE