


# 5 POST, H-BRACE CORNER, WITHOUT DEADMAN

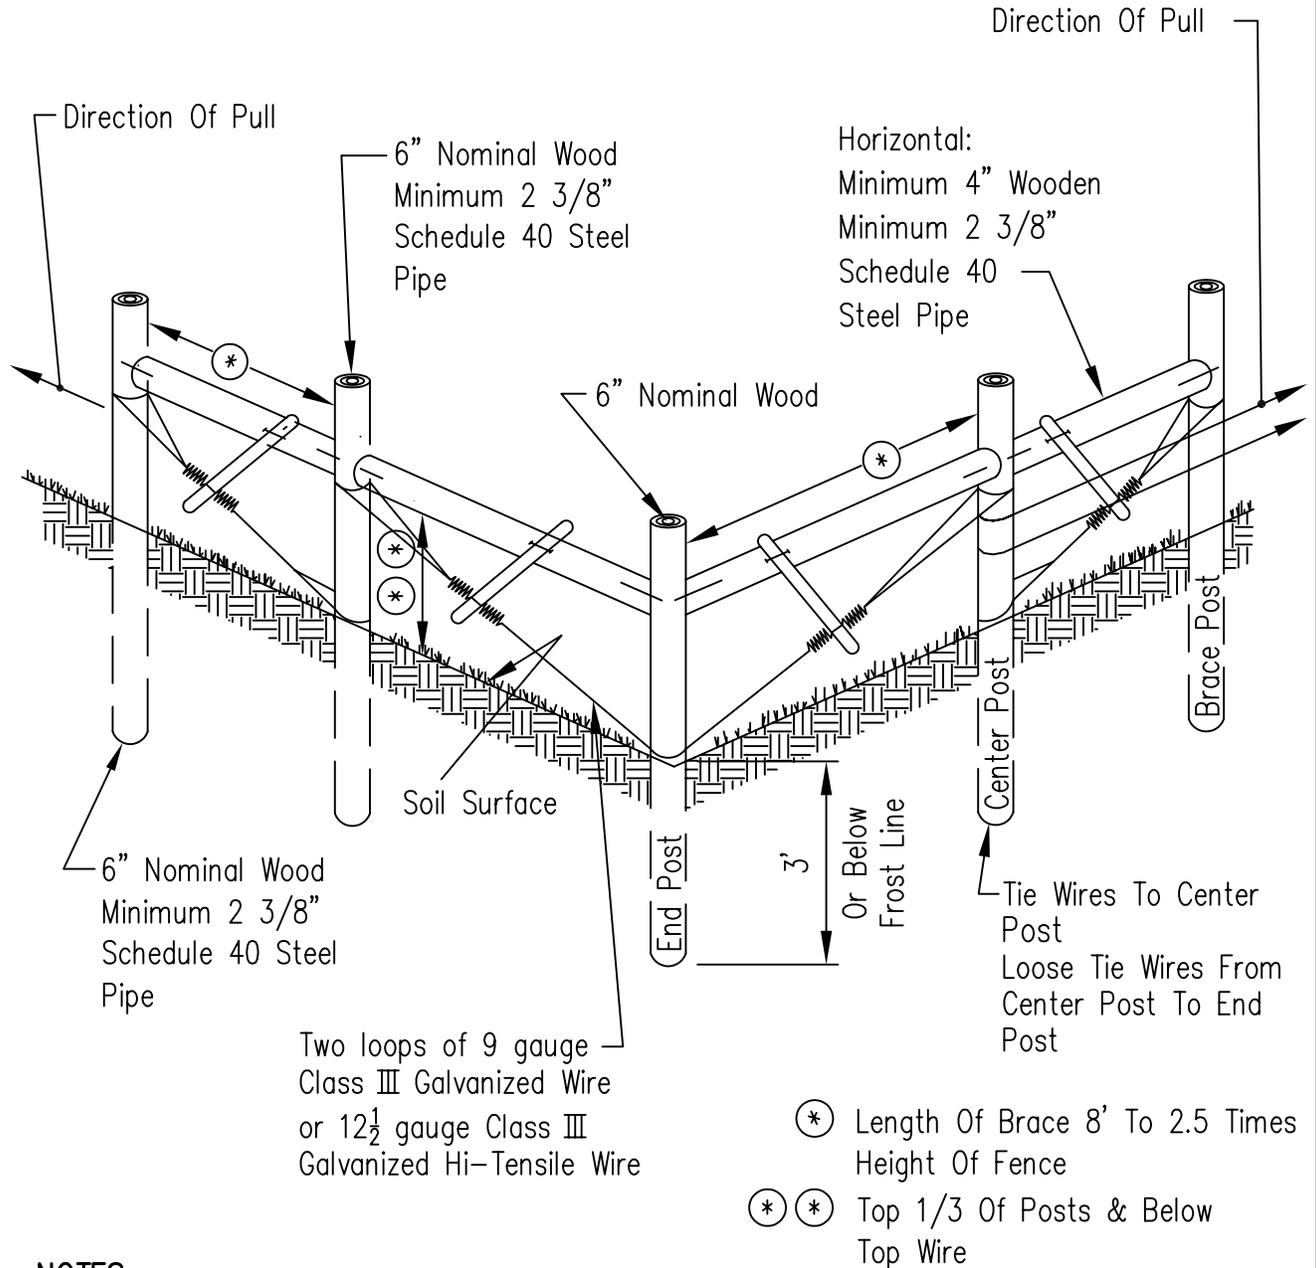

## NOTES:

1. Post must be new red cedar, blueberry juniper, osage orange, black locust, treated pine, treated hardwood or steel pipe (concrete in place). Used minimum 2 3/8" Schedule 40 Steel pipe is acceptable and must be primed painted and equal to or better than new.
2. Use "western-union" splices, figure "8" knots or crimping sleeves for malleable or Hi-Tensile wire.
3. Double H applied w/depth restriction <3', coarse textured soils or >6 strands Hi-Tensile fence

REFERENCE  
 Project \_\_\_\_\_  
 Designed \_\_\_\_\_ Date \_\_\_\_\_  
 Checked \_\_\_\_\_ Date \_\_\_\_\_  
 Approved \_\_\_\_\_ Date \_\_\_\_\_



STANDARD DWG. NO.  
**IL-805**  
 SHEET 1 OF 1  
 DATE 12-06