


H-BRACE PULL ASSEMBLY

4" Nominal Wooden Minimum. 2 3/8" Schedule 40 Steel Pipe, Capped. 8' To 2.5 X Height Of Fence Minimum Length & Placed Within Top 1/3 Of Posts & Below Top Wire

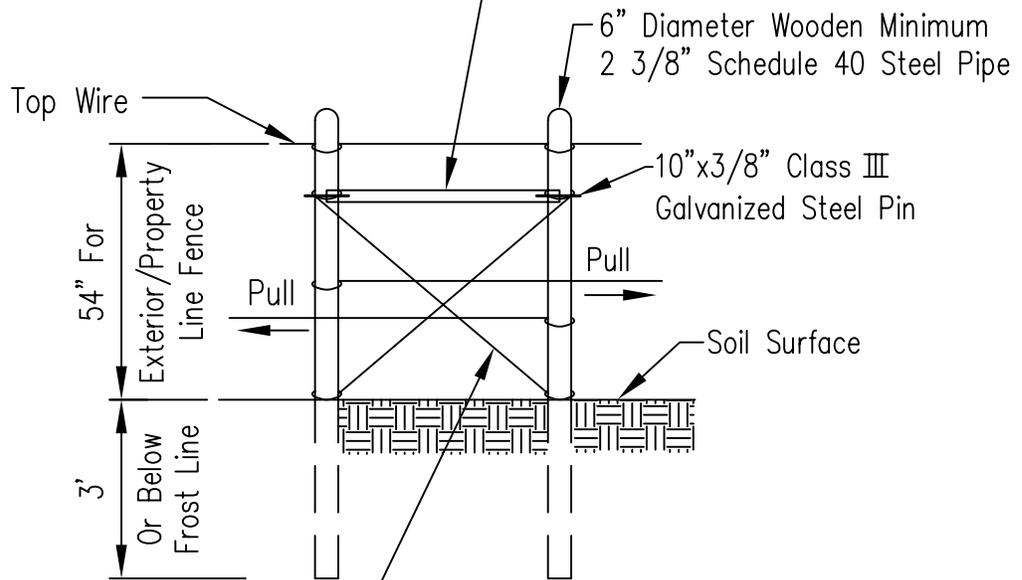

Two Loops Twisted Of Either 9-Gauge Smooth Class III Galvanized Wire, or 12 1/2-Gage Class III Galvanized Hi-Tensile Wire.

NOTE:

When tying wire to H-Brace pull assembly ensure wire is tied to post furthest from direction of pull.

REFERENCE	
Project	_____
Designed	_____ Date _____
Checked	_____ Date _____
Approved	_____ Date _____



STANDARD DWG. NO.
IL-811A
SHEET 1 OF 1
DATE 12-06