

HUTCHISON WESTERN

HEADQUARTERS • DENVER

Denver Offices and Warehouse at 7460 Highway 85 ■ Fax (303) 289-3286
Post Office Box 1158, Adams City, Colorado 80022 ■ Telephone (303) 287-2826

May 5, 2009

Mr. Charles Melton, P.E.
USDA-NRCS
101 South Main
Temple, Texas 76501

Dear Charles:

The Steel Stock Tanks manufactured by Hutchison Western are constructed of 20 gauge galvanized G90, ASTM A653, steel. This applies to both the side walls and the bottoms.

Very sincerely,

Ken Suarez
SW Regional Sales Manager





PO BOX 2144 • KERRVILLE, TEXAS • 78029-2144
PH: 830)367-5988 • FAX: 830)367-3343 • Toll Free: 888)211-5877

April 30, 2009


400 Gallon Round Water Trough

I Bob Barker certify that the 8ft X 1½ ft (400 gallon) round water trough manufactured by C&M Precast meets all the minimum material and manufacturing requirements (including ACI 318 certification by a private engineer) set by the Natural Resources Conservation Service Conservation Practice Standard for Watering Facility dated October 2008.

Bob Barker

A handwritten signature in cursive script that reads 'Bob Barker', followed by a horizontal line extending to the right.

Owner & President

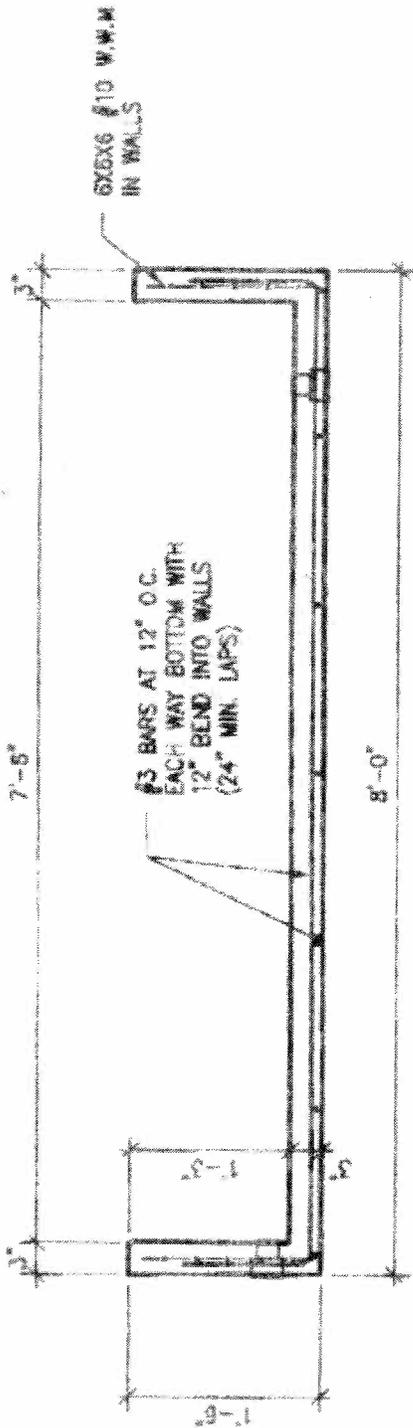

400 GALLON WATER TROUGH

SCALE: 3/4" = 1'-0"

NOTES: 1) CONCRETE SHALL BE 5000 PSI STRENGTH AT 28 DAYS WITH 4 POUNDS OF FORTA FIBER PER CY AND REBAR AS DETAILED. 2) 2" INLETS AND OUTLETS.



APRIL 27, 2009

<p>HILL COUNTRY STRUCTURAL, INC STRUCTURAL ENGINEERING CONSULTANTS 803 FM 2092, SUITE #122 PRELONCHING, TEXAS 75824 TEL. (832)990-4700 FAX (832)990-4716</p>	<p>ROUND WATER TROUGH CAM PRECAST CONCRETE, CO KENNELLVILLE, TEXAS</p>	<p>DATE: APRIL 27, 2008 JOB NO.: FILENAME: ALSTEM 3.18</p>	<p>SHEET NO.: S1</p>
--	--	--	----------------------



PO BOX 2144 • KERRVILLE, TEXAS • 78029-2144
PH: 830)367-5988 • FAX: 830)367-3343 • Toll Free: 888)211-5877


April 30, 2009

500 Gallon Round Water Trough

I Bob Barker certify that the 8ft X 2ft (500 gallon) round water trough manufactured by C&M Precast meets all the minimum material and manufacturing requirements (including ACI 318 certification by a private engineer) set by the Natural Resources Conservation Service Conservation Practice Standard for Watering Facility dated October 2008.


Bob Barker

Owner & President

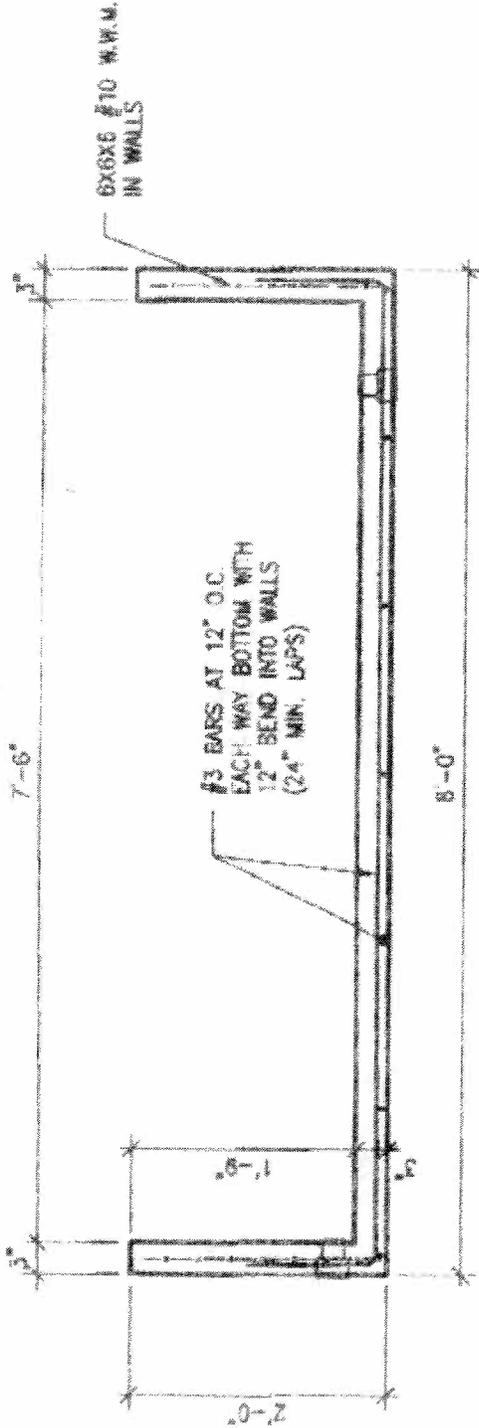

500 GALLON WATER TROUGH
 SCALE: 3/4" = 1'-0"

NOTES: 1) CONCRETE SHALL BE 5000 PSI STRENGTH AT 28 DAYS WITH 4 POUNDS OF FORTA FIBER PER CY AND REBAR AS DETAILD. 2) 2" INLETS AND OUTLETS.

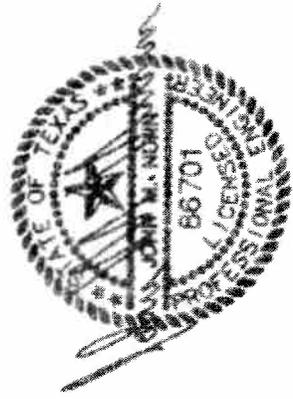

APRIL 27, 2009

HILL COUNTRY STRUCTURAL, INC STRUCTURAL ENGINEERING CONSULTANTS 603 FM 2963, SUITE #1202 FREDERICKSBURG, TEXAS 78624 TEL: (830)990-4700 FAX: (830)990-4716	ROUND WATER TROUGH CAN PRECAST CONCRETE, CO KERRVILLE, TEXAS	DATE: APRIL 27, 2008 JOB NO.: FILENAME: ASTM 313 SHEET NO.: S1
--	--	--