


Waste Storage Facility Flow Chart

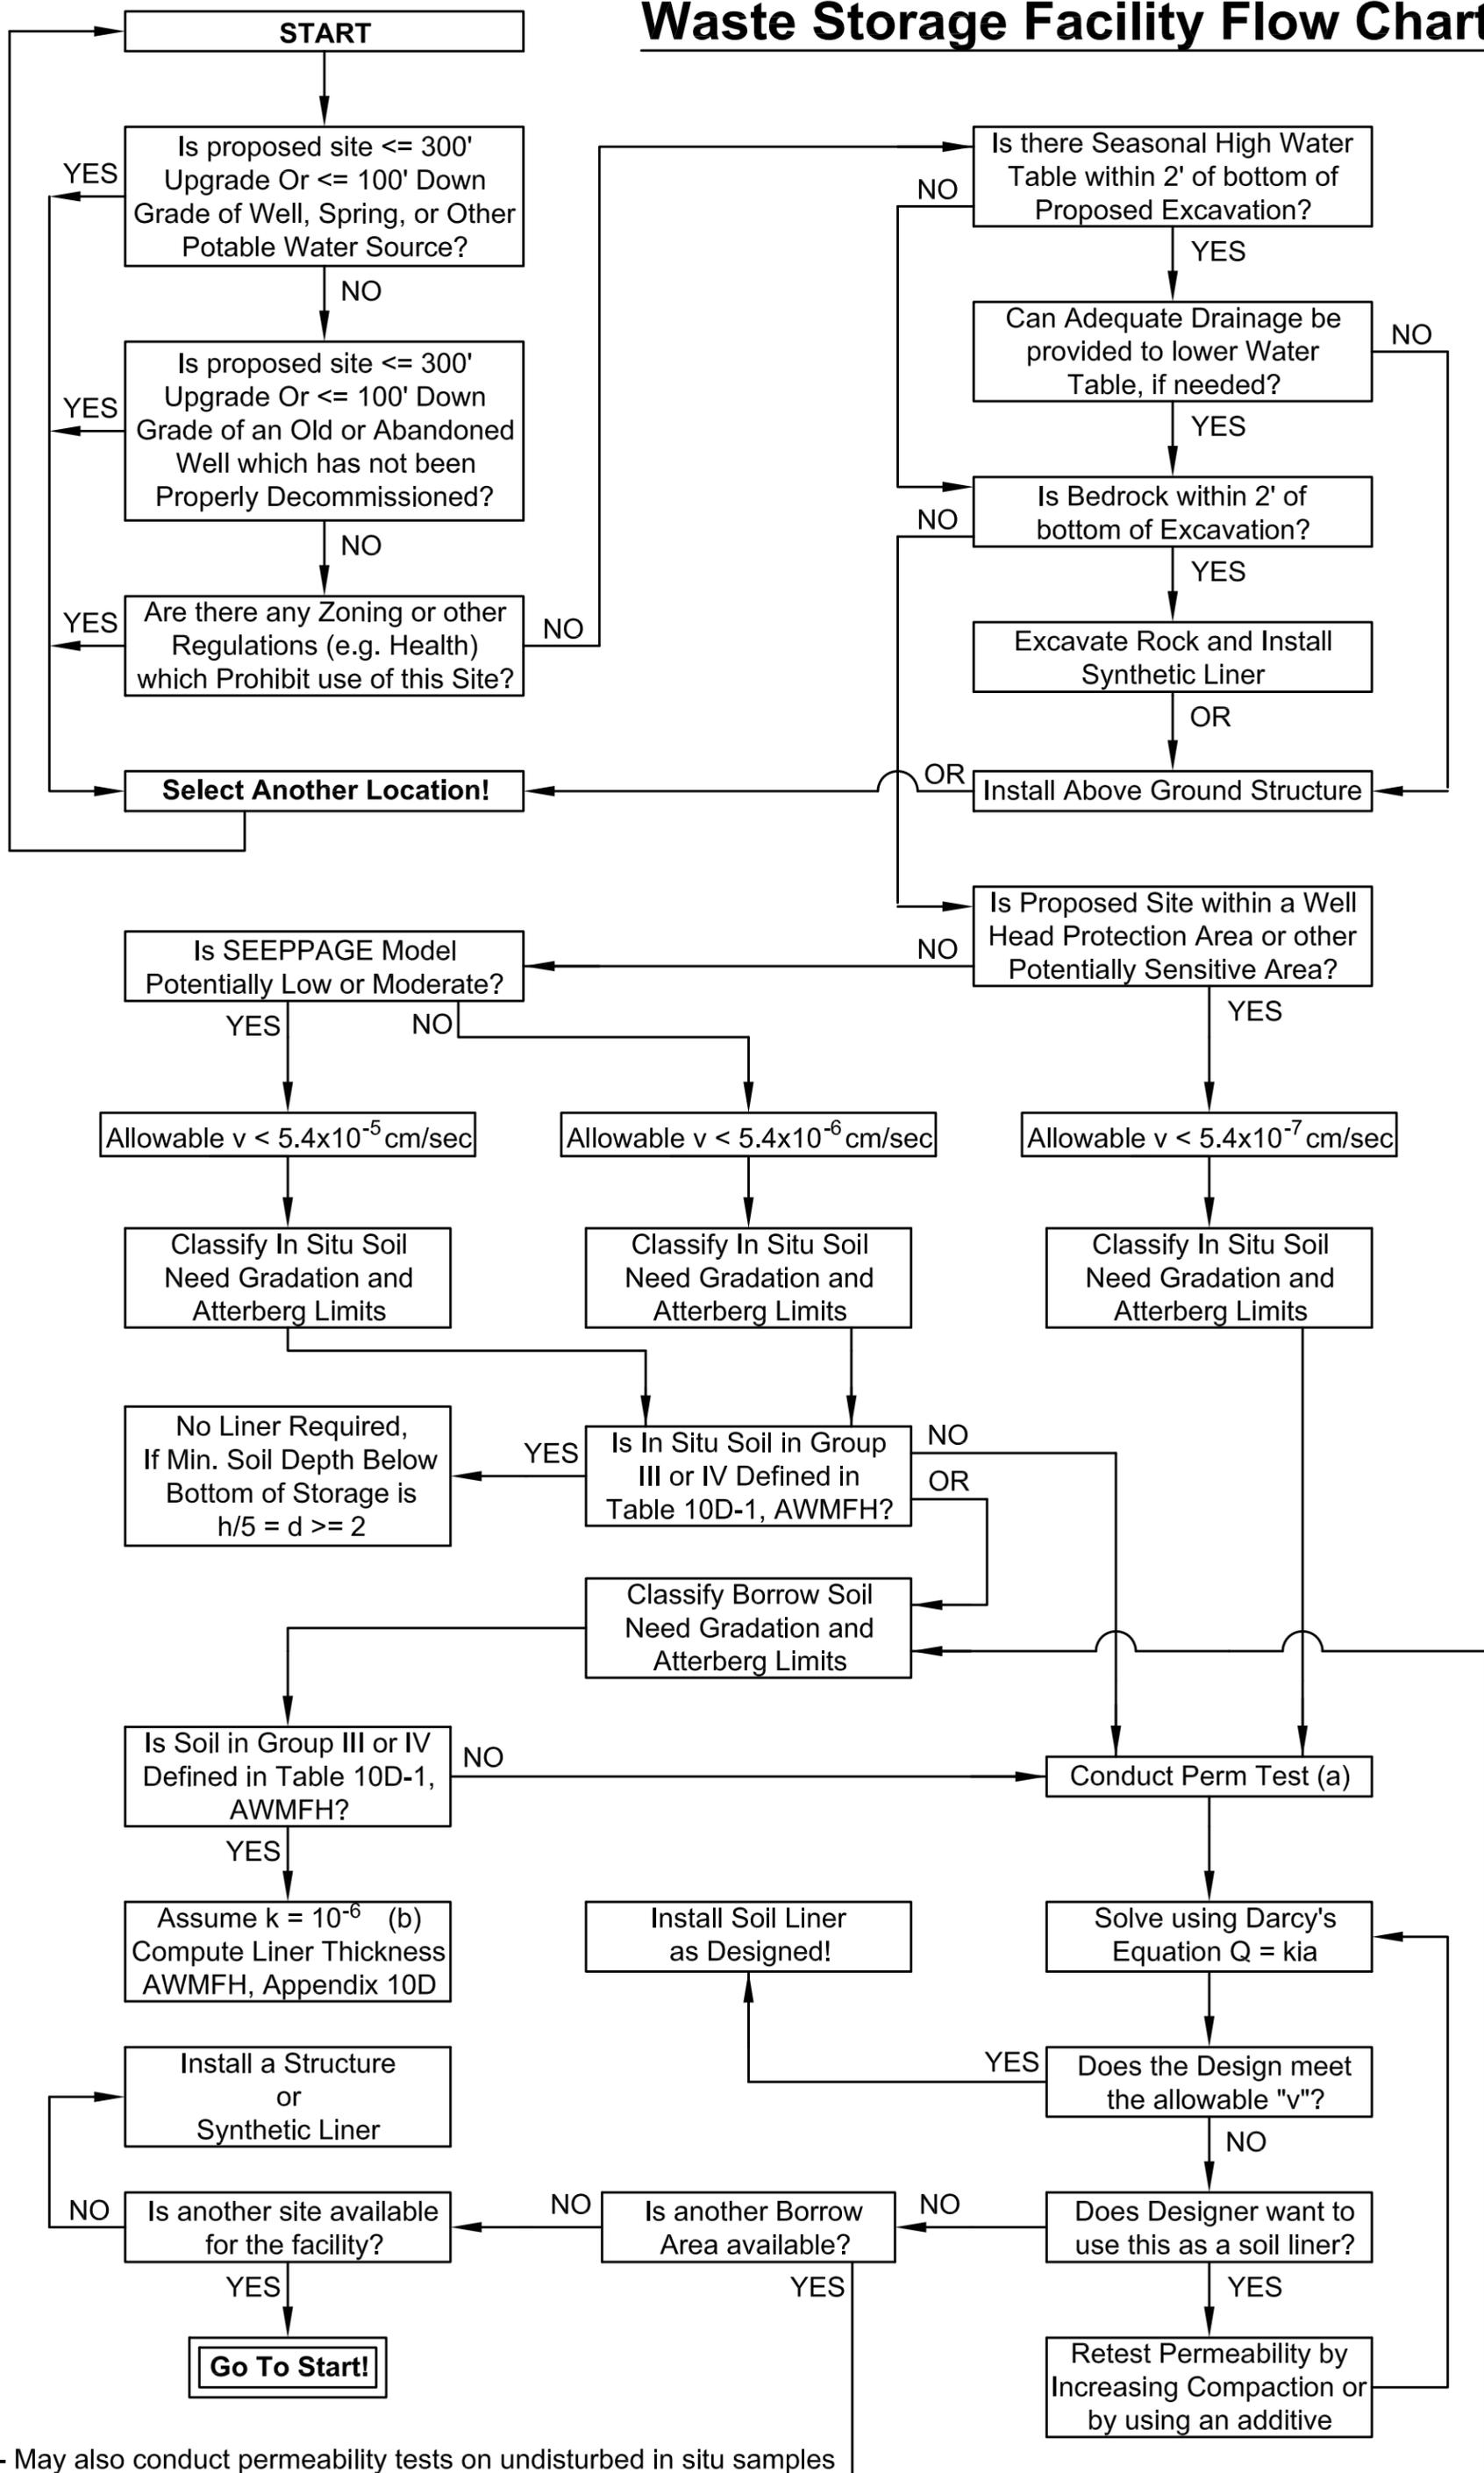

(a) - May also conduct permeability tests on undisturbed in situ samples
 (b) - 95% Proctor at 0 to +3% of Optimum Moisture
 v - Specific Discharge (cm/sec)
 k - Coefficient of Permeability (cm/sec) - Obtained through Lab Test
 d - Depth of Soil Liner (Feet)
 h - Total Storage Depth (Feet)