


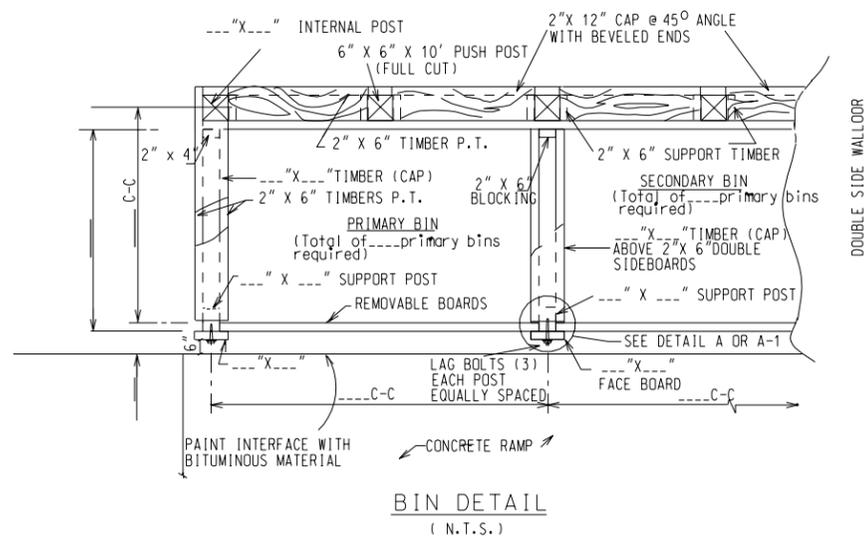


Note: Truss location at end support posts may be adjusted toward outer edge of post to allow gable end to join with metal roof. Roof shall extend out over gable metal or be flush and finished with 4" or 6" rake metal trim. Brace gable end with 2" x 4" from of gable to purlin 2/3 distance to next truss. Braces shall be on 4' center.

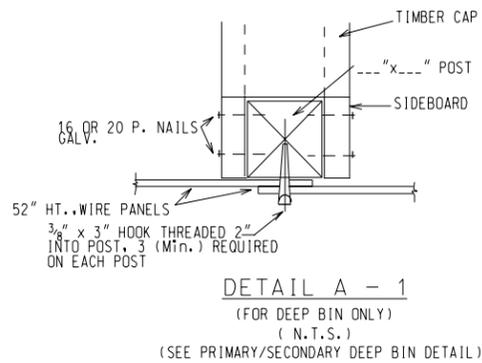

NOTE:
 SUPPORT POSTS -----X----- FULL CUT
 STEEL TRUSS INFORMATION
 INSIDE POST TO INSIDE POST-----
 CENTER LINE TO CENTER LINE POST-----
 OUTSIDE TO OUTSIDE POST-----
 TRUSS POST SEAT BRACE
 EVE OVERHANG FROM OUTSIDE POST-----

Date _____
 Designed _____
 Drawn _____
 Checked _____
 Approved _____

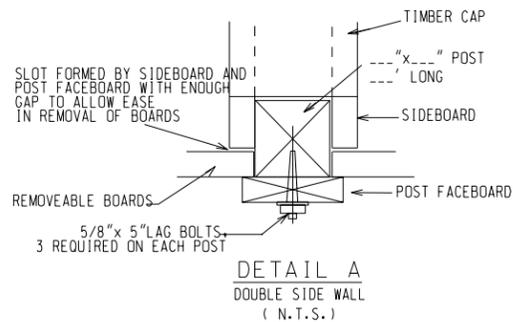

File No. _____
 Drawing No. _____
 Sheet of _____

WASTE STORAGE FACILITY
 BIN SIDE BY SIDE COMPOST FACILITY

STANDARD DWG. NO. FL-313D1

DATE 12/02 SHEET OF _____

REVISIONS		
DATE	APPROVED	TITLE