




FLOOR PLAN  
(N.T.S.)

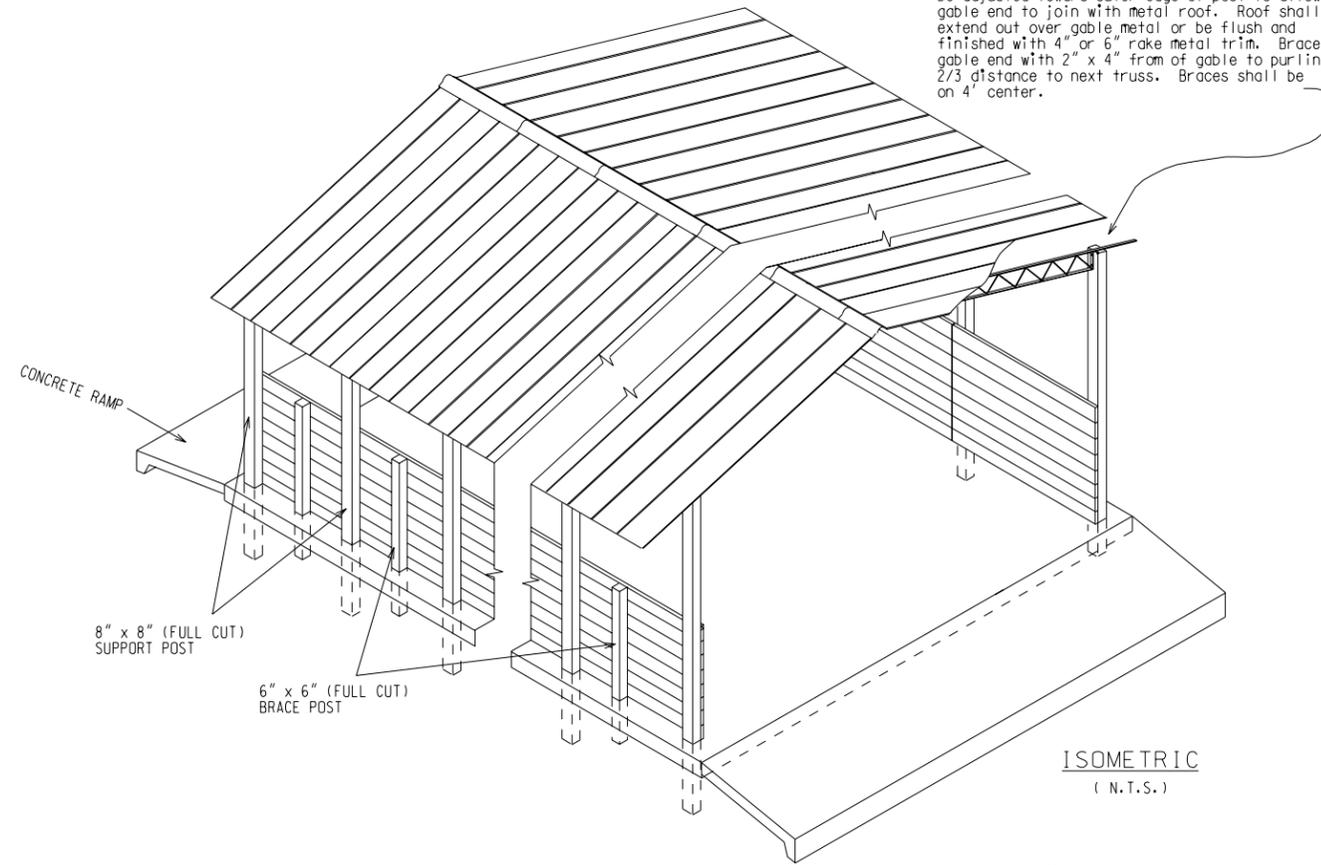


Note: Truss location at end support posts may be adjusted toward outer edge of post to allow gable end to join with metal roof. Roof shall extend out over gable metal or be flush and finished with 4" or 6" rake metal trim. Brace gable end with 2" x 4" from of gable to purlin 2/3 distance to next truss. Braces shall be on 4' center.

NOTES:  
All wood sizes are nominal dimensions, unless otherwise noted. Nails shall be 15d galvanized except as noted.

NOTE:  
SUPPORT POSTS ---X--- FULL CUT  
STEEL TRUSS INFORMATION  
INSIDE POST TO INSIDE POST ---  
CENTER LINE TO CENTER LINE POST ---  
OUTSIDE TO OUTSIDE POST ---  
TRUSS POST SEAT BRACE  
EVE OVERHANG FROM OUTSIDE POST ---

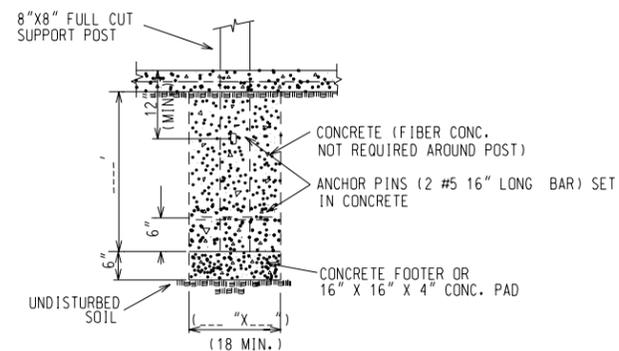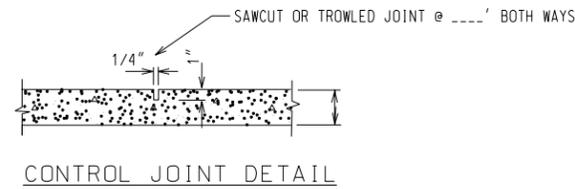

POST EMBEDMENT DETAIL FOR SUPPORT POST  
(N.T.S.)

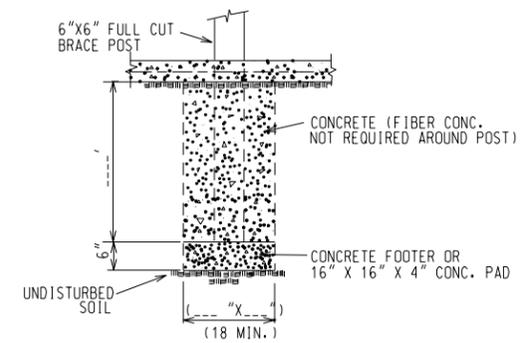


POST EMBEDMENT DETAIL FOR BRACE POST  
(N.T.S.)

COMPOST AND LINEAR STACK WASTE STORAGE FACILITY	
STANDARD DWG. NO.	FL-313E1
DATE	12/02
SHEET	OF

REVISIONS		
DATE	APPROVED	TITLE

Date	
Designed	
Drawn	
Checked	
Approved	



File No.	
Drawing No.	
Sheet	of