


LINE PANEL

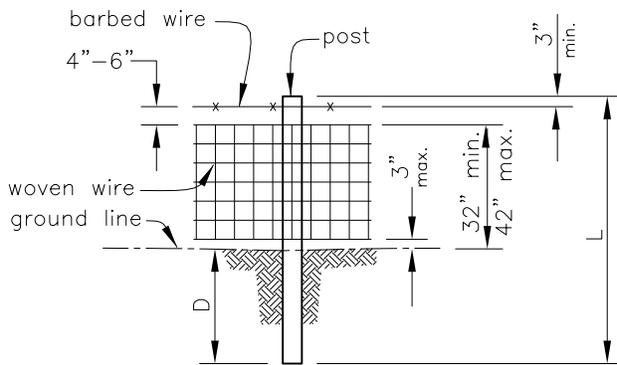

WOVEN WIRE W/ONE BARB DETAIL

**WOVEN WIRE** One barbed wire will be above woven wire. Top and bottom wires shall be 11 gauge or heavier and line and stay wires shall be 14 1/2 gauge or heavier. There will be a minimum of 6 horizontal wires with a max. of 12 inch spacing between vertical stay wires. The label shall indicate the wire meets ASTM A-116 or ASTM A-584 standards.

LINE	Wood:	L = 6 ft. min. D = 2 ft. min. Dia. = 3 in. min.	Steel:	L = 6 ft. min. D = 22 in. min. Standard "T" or "U"; ≥ 1.25 lbs/ft of length
	CORNER OR GATE OR BRACE	Wood: L = 7 ft. min. D = 3 ft. min. Dia. = 6 in. min.	Steel:	L = 7 ft. min. D = 3 ft. min. Dia. = Round 2-3/8 in. O.D. or Angle iron 2-1/2 x2-1/2 x1/4 (in.)
STAYS	Wood: 1-1/2 in. dia. min. Fiberglass: Any manufactured for this purpose Wire: 9 1/2 gauge, zinc coated			

**NOTE:**  
Sheep & Goats only – minimum height is 39 inches.

Reindeer & Bison – minimum height is 60 inches and all posts will be one foot longer.

Bison – Woven wire 47 inches high with one or two barbed wire on top. Post spacing is 16.5 feet without stay and 20 feet with one stay.

Drawing not to scale. Standardized drawing must be adapted to the specific site.



Designed _____	Date _____	File Name AK382-008.dwg
Drawn B DALLAS	3/07	Drawing Name
Checked _____		3/8/2007 3:03PM
Approved _____		Sheet of