



LINE PANEL

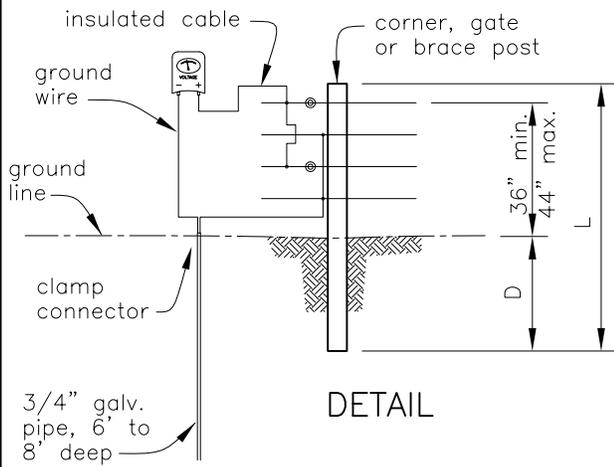

DETAIL

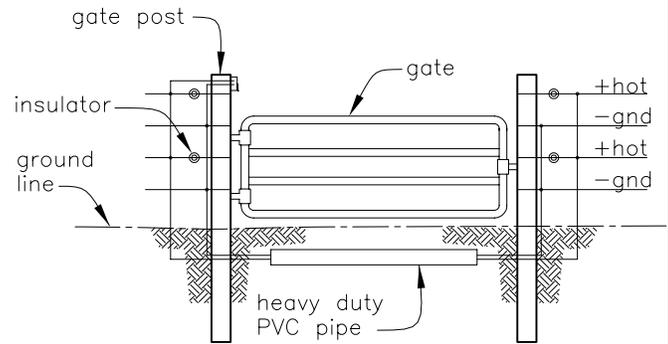

ROAD CROSSING DETAIL

LINE POSTS: Fiberglass ("T"-shaped, 1-1/4"x1-1/4" min.)
 Wood insultimber (1 in. square)
 Steel (> 1.01 lb/ft)
 Wood (3 in. dia. min.)

L = 6 ft. min.
 D = 18 in. min.

CORNER, GATE, Fiberglass ("T"-shaped, 1-1/4"x1-1/4" min.)
 BRACE POSTS: Wood insultimber (2"x1-1/2")
 Steel (> 1.25 lb/ft)
 Wood (6 in. dia. min.)

L = 7 ft. min.
 D = 3 ft. min.

ENERGIZERS: 110-volt or 220-volt line-powered
 12-volt battery
 solar-powered

STAYS: Wood
 Fiberglass

FASTENERS: Porcelain insulators
 UV stabilized plastic insulators

GALVANIZING shall be at least Class III as per ASTM A-121.

Drawing not to scale. Standardized drawing must be adapted to the specific site.



Designed _____	Date _____	File Name AK382-011.dwg
Drawn B DALLAS	3/07	Drawing Name
Checked _____		3/9/2007 10:04AM
Approved _____		Sheet of