




**LEGEND**

- Use electric fence taps, crimps or clamps for connections shown.
- (+) Positive
- (-) Negative

**ISOMETRIC OF ENERGIZER ASSEMBLY**

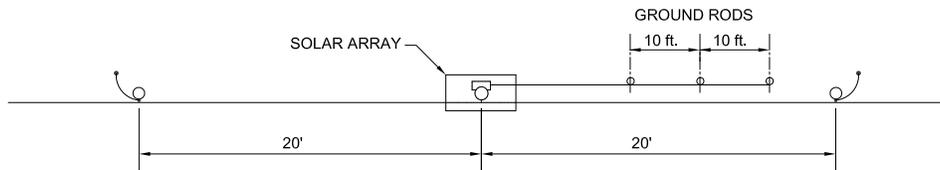

**SITE PLAN**

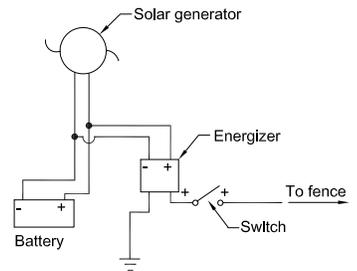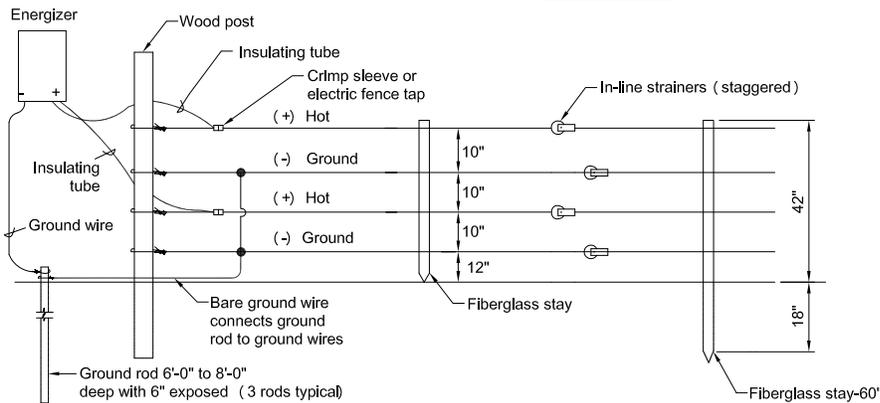

**WIRING DIAGRAM**

**TYPICAL 4 WIRES-HOT/GROUND SYSTEM**

**NOTES:**

1. Use 4" tube Insulator on line posts and Insulating tube or Insulated cable for other applications.
2. Fiberglass stays may be fiberglass t-posts or round non-metallic rods with clip attachments.
3. Ground rods shall be located a minimum of 24 ft from the following:
  - A. Ground rods connected to another electrical system.
  - B. Telephone ground rods.
  - C. Underground metal piping system.
  - D. Metal support or other element of a structure which rests upon or has been driven into the soil.



**ENERGIZER ASSEMBLIES**

Designed _____	Date _____	File Name _____
Drawn _____		Drawing Name AL-ECS-382-14
Checked _____		Rev. 5/16
Approved _____	5/12	Sheet of _____