



LATERAL BRACING AND BEARING PAD DETAILS

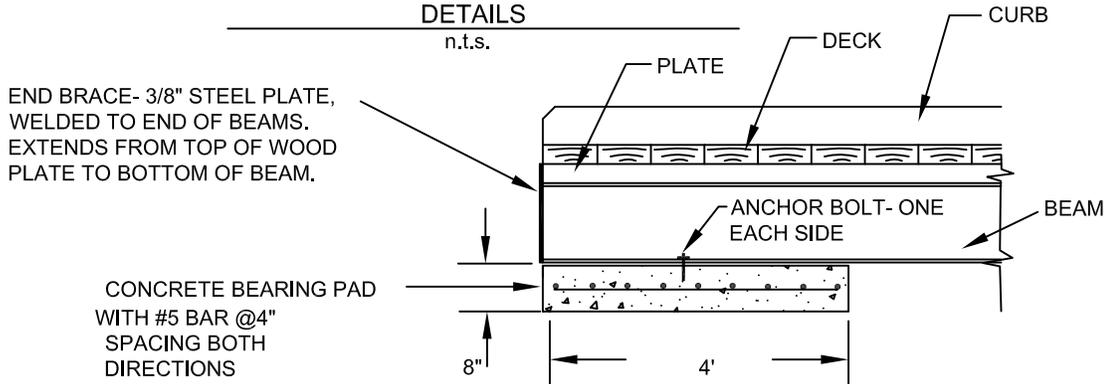


BEAMS SHALL BE ANCHORED TO BEARING PAD USING 2- 1/2"x 6" ANCHOR BOLTS SET ADJACENT TO BEAM FLANGE. OVERLAP WASHER OR 1/4" STEEL PLATE ON FLANGE. USE 3" MINIMUM WASHER OR PLATE.

LATERAL BRACING: L 2 1/2" x 2 1/2" x 3/8" STEEL ANGLE @ 10' INTERVALS ACROSS THE CLEAR SPAN

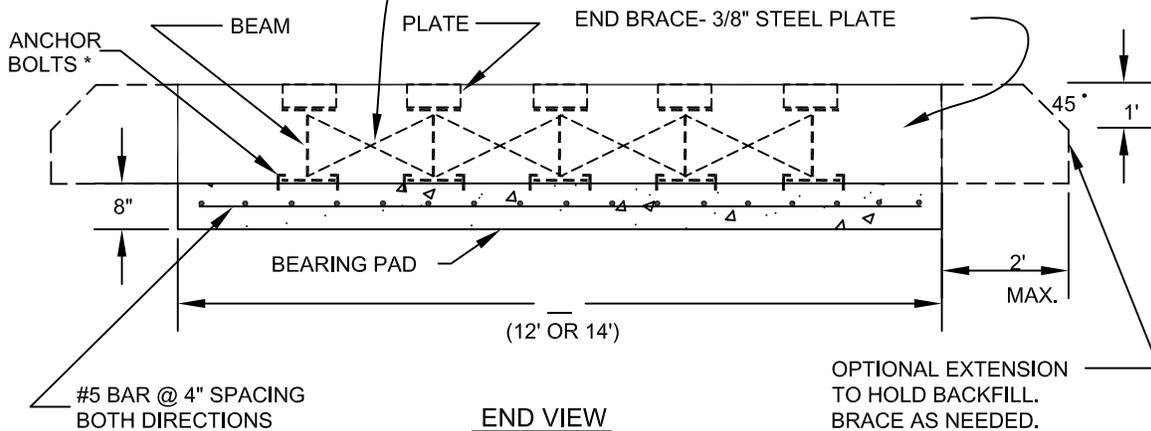

* (20) 1/2" X 6" ANCHOR BOLTS W/ 3" WASHERS OR PLATES

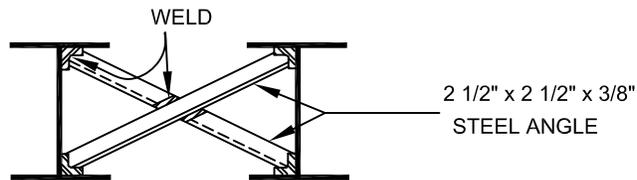

DETAIL
LATERAL BRACING