

**NATURAL RESOURCES CONSERVATION SERVICE
CONSERVATION PRACTICE STANDARD**

TERRACE

(Ft, m)

Code 600

Definition

An earth embankment, a channel, or a combination ridge and channel, constructed across the slope.

Scope

This standard applies to the planning and design of all types of terraces. It does not apply to diversions.

Purpose

To: (1) Reduce slope length, (2) reduce erosion, (3) reduce sediment content in runoff water, (5) intercept and conduct surface runoff at a nonerosive velocity to a stable outlet, (6) retain runoff for moisture conservation, (7) prevent gully development, (8) re-form the land surface, (9) improve farmability, or (10) reduce flooding.

Conditions where practice applies

This practice applies where:

1. Water erosion is a problem,
2. There is a need to conserve water,
3. The soils and topography are such that terraces can be constructed and farmed with reasonable effort,
4. A suitable outlet can be provided, or

5. Runoff and sediment can damage land or improvements downstream or impair water quality.

Design Criteria

Spacing

Spacing which best fits the topography, crops, and farm machinery shall be used within criteria permitted in this section. The horizontal spacing does not have to be less than 90 feet. The maximum spacing shall be determined by the following method with consideration given to the conservation cropping system used by the operator.

$$V.I. = XS + Y \text{ or } H.I. = (XS + Y)^{100/S}$$

Where V.I. = Vertical interval in feet
 H.I. = Horizontal interval in feet
 S = Land slope in feet per 100 feet
 X = Rainfall variable = 0.4
 Y = Soil-cover-management variable with values from 1.0 to 4.0

A "Y" value of 1.0 should be selected for easily erodible soils with tillage systems that provide little or no cover during periods of intense rainfall.

A value of 4.0 shall be used for erosion-resistant soils with tillage systems that leave a large amount of cover (1.5 tons of straw equivalent) on the surface.

The following will be used as a guide in the selection of “Y” values:

<u>Conservation Cropping System</u>	<u>Values of Y</u>		
	Easily Erodible Soils	Moderately Erodible Soils	Erosion Resistant Soils
A. Continuous Row Crop, fall fallow	1.0	1.5	2.0
B. Continuous Row Crop with residue left (1.0 ton/acre straw equivalent shredded)	1.5	2.0	2.5
C. Continuous Row Crop with residue left (1.0 ton/acre straw equivalent shredded) and winter cover	2.0	2.5	3.0
D. Continuous Row Crop with residue left (1.5 ton/acre straw equivalent shredded)	2.0	2.5	3.0
E. Continuous Row Crop with residue left (1.5 ton/acre straw equivalent shredded) and winter cover	2.5	3.0	3.5
F. Row Crops (Reduced Tillage)	2.75	3.25	3.75
G. Row Crops (No Till)	3.0	3.5	4.0

Soils with “K” factors of 0.41 and above shall be considered to be easily erodible soils. Soils with “K” factors of 0.23 to 0.40 shall be considered as moderately erodible soils. Soils with “K” factors of 0.22 and less shall be considered as erosion resistant soils.

See Table 1 for spacing for varying values of “Y” and slope.

The maximum horizontal spacing determined shall not be exceeded. The terrace spacing may be increased as much as 10% to provide better alignment or location, to adjust for farm machinery, or to reach a satisfactory outlet.

A value of 2.5 shall be used if one of the factors indicated is favorable and the other unfavorable. Other values between 1.0 and 4.0 may be used according to the estimated quality of the factors. The horizontal spacing does not have to be less than 90 ft.

2. Universal Soil Loss Equation (USLE). The spacing shall not exceed the slope length determined by using the allowable soil loss, the most intensive use planned,

the expected level of management, and the terrace P factor (table 1).

In no case shall the maximum horizontal spacing exceed that shown in Table 2 for the conditions shown. The maximum limits may not be exceeded when making the adjustments indicated below. Spacing may be increased as much as 10 percent to provide better alignment or location, to adjust for farm machinery, or to reach a satisfactory outlet. Spacing may be increased an additional 10 percent for terraces with underground outlets. The spacing shall be adjusted to provide for an even number of trips for anticipated row crop equipment and maximum opportunity for changing row widths. The likelihood of benching of steep slopes by tillage, land forming, and erosion shall be considered when determining the terrace interval.

For level terraces used for erosion control and water conservation, the spacing shall be determined as indicated earlier, but the maximum horizontal spacing shall not exceed 600 ft (180 m). An x value of 0.8

(0.24) may be used for all level terraces used primarily to impound water. Figures 1 and 2 show the horizontal interval or erosion length to be used in calculating terrace spacing (Figure 3).

For terraces on non-cropland, the maximum spacing shall be governed by the capacity requirement.

Table 1.-- Terrace P factors

Horizontal Interval		Closed Outlets ¹	Open outlets with percent grade of: ²		
(ft)	(m)		0.1 - 0.3	0.4 - 0.7	0.8
Less than 110	Less than 33	0.5	0.6	0.7	1.0
110-140	33-42	0.6	0.7	0.8	1.0
140-180	43-54	0.7	0.8	0.9	1.0
180-225	55-68	0.8	0.8	0.9	1.0
225-300	68-90	0.9	0.9	1.0	1.0
More than 300	More than 90	1.0	1.0	1.0	1.0

NOTE: If contouring or stripcropping P factors are appropriate, they can be multiplied by the terrace P factor for the composite P factor.

1 "P" factors for closed outlet terraces also apply to terraces with underground outlets and to level terraces with open outlets.

2 The channel grade is measured on the 300 ft. of terrace or the one-third of total terrace length closest to the outlet, whichever distance is less.

Table 2. Maximum horizontal spacing for terraces

Percent Slope	USLE R Factor of						With Contour Stripcropping		For Concentrated Flow Control	
	0 - 35		35 - 175		More than 175		Ft	M	Ft	M
	Ft	M	Ft	M	Ft	M				
0-2	700	210	500	150	450	130	600	180	700	210
2-4	700	210	400	120	300	90	600	180	700	210
4-6	600	180	400	120	200	60	600	180	600	180
6-9	400	120	300	90	150	45	400	120	500	150
9-12	400	120	250	75	150	45	250	75	500	150
12-18	250	75	200	60	150	45	150	45	400	120
More than 18	250	75	200	60	150	45	150	45	300	90
Minimum spacing required, all slopes	200	60	150	45	90	27	90	27	200	60

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

NRCS, LA
January 1982

Alignment. Terraces shall be parallel if feasible and as parallel as practicable. Curves shall be long and gentle to accommodate farm machinery. Land forming, extra cut or fill along the terrace line, multiple outlets, variations in grade, channel blocks, and other methods shall be used to achieve good alinement.

Field efficiency may be used to compare alternative terrace systems. Field efficiency is the ratio of time required to farm the field being planned, to that required to farm a rectangular field of the same acreage ½ mile long.

Capacity. The terrace shall have enough capacity to control the runoff from a 10-year frequency, 24-hour storm without overtopping. For terraces with underground outlets, the capacity shall be increased by the estimated 10-year sediment accumulation, unless provisions are made to maintain the design capacity through maintenance. Terrace systems designed to provide flood protection or to function with other structures shall have

adequate capacity to control a storm of a frequency consistent with the potential hazard. When the capacity is determined by the formula $Q = AV$ and the V is calculated by using Manning's formula, an n value of 0.06 shall be used for bare channels; and SCS-TP-61, Handbook for Channel Design for Soil and Water Conservation, or equivalent, shall be used for vegetated channels.

Cross section

The terrace cross section shall be proportioned to fit the land slope, the crops grown, and the farm machinery used. The ridge height shall include a reasonable settlement factor. The ridge shall have a minimum width of 3 feet at the design elevation. The minimum cross sectional area of the terrace channel shall be 8 square feet for land slopes of 5 percent or less; 7 square feet for slopes from 5 to 8 percent; and 6 square feet for slopes from 8 to 12 percent. The opening at the outlet end of terraces shall have a cross section equal to that specified for the terrace channel.

Terrace Spacing
Using
Terrace Spacing Formula of
 $H.I. = (0.4S + Y)^{100}/S$

Slope %	Values of Y									
	1.0	1.5	2.0	2.5	2.75	3.0	3.25	3.50	3.75	4.0
1	140	190	240	290	315	340	365	390	415	440
2	90	115	140	165	178	190	203	215	228	240
3	90	90	107	124	132	140	148	157	165	173
4	90	90	90	103	108	115	121	128	134	140
5	90	90	90	90	95	100	105	110	115	120
6	90	90	90	90	90	90	94	98	103	107
7	90	90	90	90	90	90	90	90	90	97
8	90	90	90	90	90	90	90	90	90	90

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

NRCS, LA
January 1982

End closures. Level terraces may have open ends, partial end closures, or complete end closures. Partial and complete end closures shall be used only on soils and slopes where the

stored water will be absorbed by the soil without appreciable crop damage or where underground outlets are provided.

Figure 1.

Horizontal Interval for Steep Back-slope Terraces

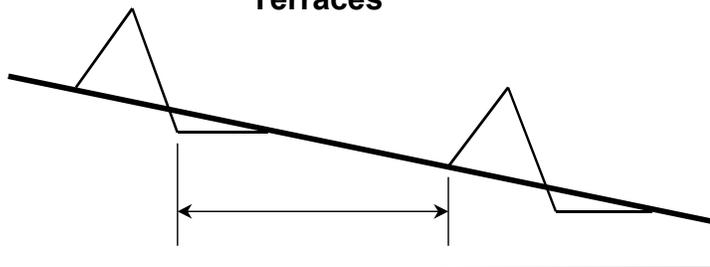


Figure 2.

Horizontal Interval for Broad-Based Terraces


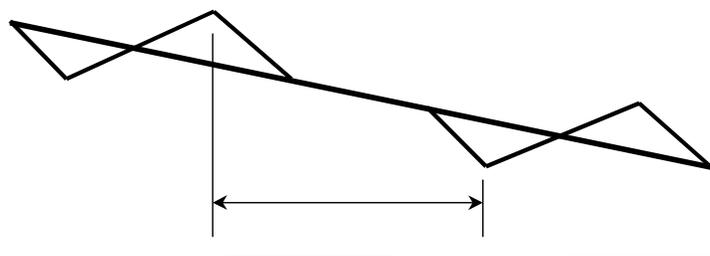


Figure 3.

Terrace Spacing

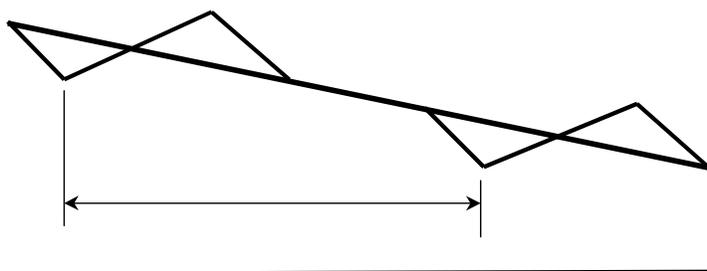

If terraces with closed or partly closed ends are specified, the end closures must be installed before the terraces are completed. The end closures shall be designed so that the water flows over the end closure before overtopping

the terrace ridge.

Partial end closures shall not be more than half the effective height of the terrace ridge. Complete end closures are more than half the height of the ridge. The cross section of the closures may be

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

NRCS, LA
January 1982

less than the terrace cross section.

Channel grade. Channel grade shall be determined by one of the following methods:

1. Maximum channel grade in the lower reaches of the channel shall not exceed 0.6 percent.
2. Maximum channel velocity for farmed channels shall be nonerosive for the soil and planned treatment. Maximum velocity for erosion-resistant soils is 2.5 ft/s (0.75 m/s); for average soils, 2.0 ft/s (0.6 m/s); and for easily erodible soils, 1.5 ft/s (0.45 m/s). Velocity shall be computed by Manning's formula, using an n value of 0.035.
3. Maximum channel velocities for permanently vegetated channels shall not exceed those used for grassed waterways.

Channel grades may be uniform or variable. Channel velocity shall not exceed that which is For short distances and in upper reaches, channel grades or velocities may be increased to improve alignment. If terraces have an underground outlet, water and sediment will pond in the channel, thus reducing the velocity non-erosive for the soil and planned treatment.

and allowing steeper channel grades near the outlet. Minimum grades shall be such that ponding in the channel because of minor irregularities will not cause serious damage to crops or delay field operations.

Terrace length. The volume of water stored in level terraces is proportional to the length. Therefore, it is necessary that the length be held within reason so that damage in case of a break is minimized. Level terrace length shall not exceed 3,500 ft. (1,000 m) unless the channel is blocked at intervals not exceeding 3,500 ft. (1,000 m) unless the channel is blocked at intervals not exceeding 3,500 ft (1,000m). Normally, the gradient terrace length is controlled by the capacity and the non-erosive velocity requirements.

Outlets. All terraces must have adequate outlets.

Vegetated outlets may be used for gradient or open-end level terraces. Such an outlet may be a grassed waterway or other vegetated area.

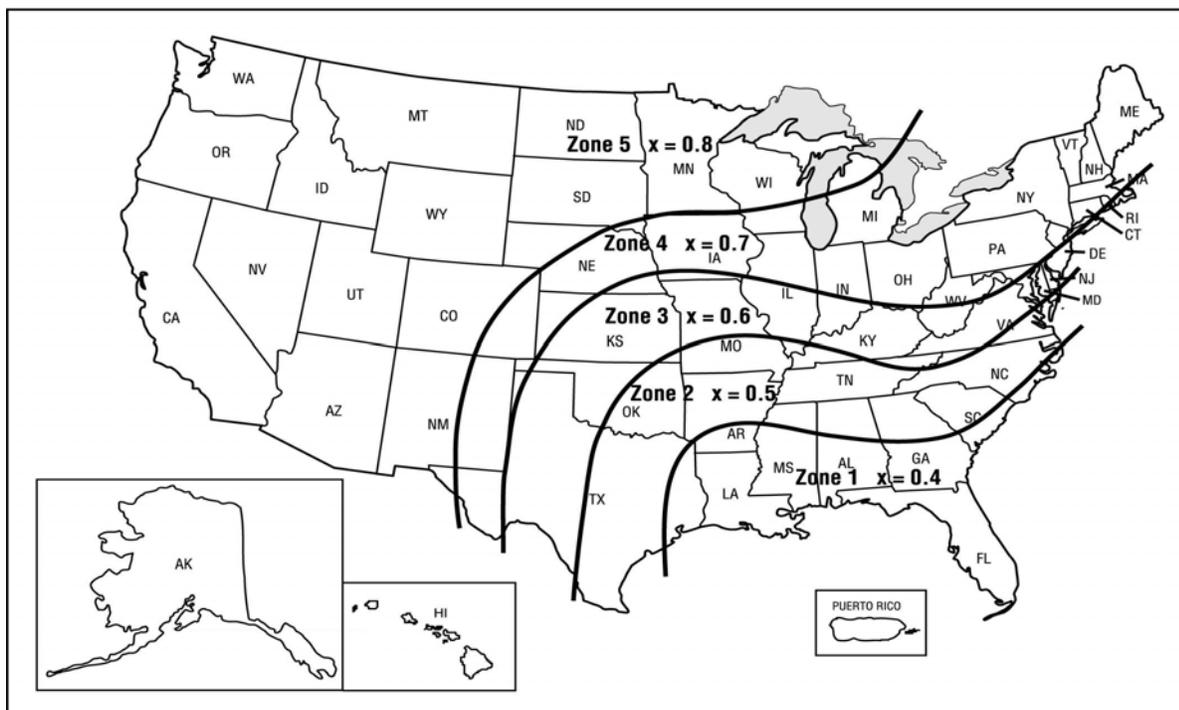


Figure 4 – Values of x in equation $V.I. = xs + y$ or $H.I. = (xs + y)(100/s)$.

must convey runoff water to a point where the out-flow will not cause damage. Outlets shall be installed and vegetated before the terrace is constructed if necessary to provide a stable nonerodible outlet or to insure establishment of vegetative cover. The water surface in the terrace shall not be lower than the water surface in the outlet at their junction when both are operating at design flow.

Underground outlets may be used on gradient or level terraces. The outlet consists of an intake and an underground conduit. An orifice plate, increase in conduit size, or other features shall be installed as needed to control the release rate and prevent excessive pressure when more than one terrace discharges into the same conduit. The discharge, when combined with the storage, shall be such that a 10-year-frequency, 24-hour storm will not overtop the terrace, and growing crops will not be damaged significantly by standing water. The release time shall not exceed 48 hours for the design storm. Shorter periods may be necessary for some crops, depending on soil characteristics and water tolerance of crops to be grown.

The underground conduit shall meet the requirements specified for underground outlets (620) or for subsurface drains (606). Conduits must be installed deep enough to prevent damage from tillage equipment. The inlet shall consist of a vertical perforated pipe of a material suitable for the intended purpose. The inlet shall be located uphill of the front slope of the terrace ridge, if farmed, to permit passage of farm machinery and, if necessary, to provide for the anticipated accumulation of sediment and subsequent raising of the terrace ridge. The outlet of the conduit shall have adequate capacity for the design flow without causing erosion. Blind inlets may be used where they are effective, usually in well-drained soils.

Soil infiltration may be used as the outlet for level terraces. Soil infiltration must permit drainage of the design storm from the terrace channel within a reasonable period so that crops are not significantly damaged by standing water.

Combinations of different types of outlets may be used on the same system to maximize water conservation and to provide for economical installation of a more farmable system.

Safety and maintenance

A program shall be established for maintaining terrace capacity, storage, ridge height, and outlets. Each inlet for underground outlets must be kept clean and sediment buildup redistributed so that the inlet is in the lowest place. Inlets damaged or cut off by farm machinery must be replaced or repaired immediately.

Terrace ridges, especially those with steep back slopes, can be very hazardous. For this reason, some farmers prefer steep front slopes, thus keeping machinery away from the steep back slopes. All cut and fill slopes that are to be farmed must be no steeper than those on which farm equipment can operate safely. Any hazards must be brought to the attention of the responsible person.

Vegetation. All areas to be vegetated shall be established to grass as soon as practicable after construction. The sod shall be maintained and trees and brush controlled by chemical or mechanical means.

Plans and specifications

Plans and specifications for installing terraces shall be in keeping with this standard and shall describe the requirements for applying the practice to achieve its intended purpose.

Terrace Specifications

Construction

All dead furrows, ditches, or gullies shall be filled before constructing the terrace or shall be part of the construction. All old terraces, fence rows, hedge rows, trees, and other obstructions shall be removed, as necessary, to install a farmable system.

The terraces shall be constructed according to planned alignment, grade, and cross section with the specified overfill for

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

NRCS, LA
January 1982

settlement and the channel graded to drain reasonably well.

Any ditch or depression at the bottom of the back slope shall be filled and smoothed so that drainage will be away from the terrace and not parallel to it.

Provisions must be made to prevent piping if underground conduits are located under terrace ridges. Mechanical compaction, water packing, trench sidewall sloping, and installation and backfill of conduit trenches early enough to allow adequate settlement are methods that can be used. The materials used for the inlet and the conduit shall be suitable for the purpose intended (see standard 606). Terrace ridges constructed across gullies or depressions shall be compacted by machinery travel or by other suitable means to insure proper functioning of the terrace.

The surface of the finished terrace shall be reasonably smooth and present a workmanlike finish.

If necessary, topsoil shall be stockpiled and spread over excavations and other areas to facilitate restoration of productivity.

If vegetation is required, seedbed preparation, fertilizing, seeding, and mulching shall comply with specifications in technical guide.