



Livestock Fence


Multi-Strand High Tensile Fence

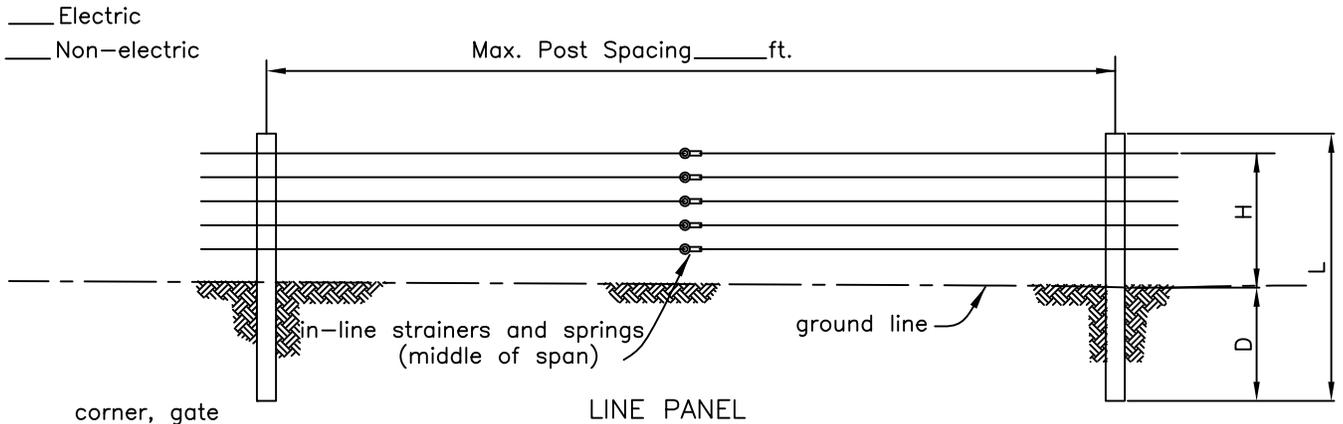

LINE PANEL

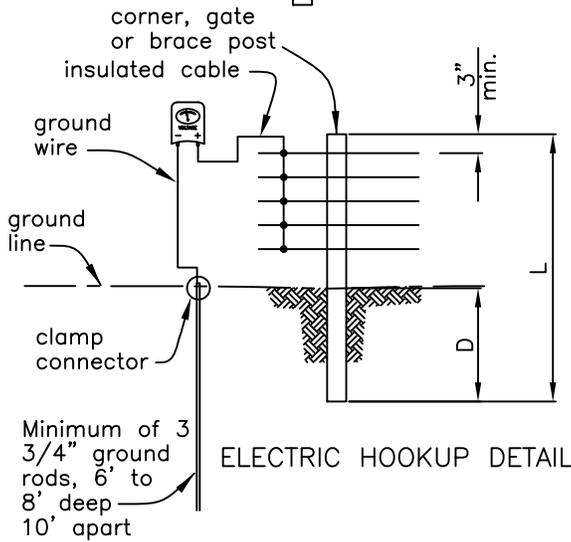

ELECTRIC HOOKUP DETAIL

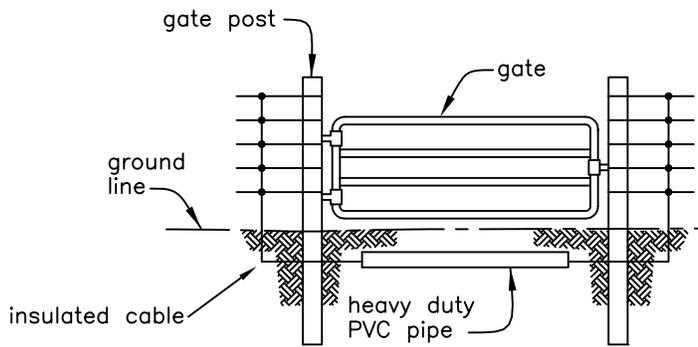

ELECTRIC ROAD CROSSING DETAIL

LINE POSTS: Wood L = \_\_\_\_ ft. min.  
D = 2 ft. min.  
Dia. = 3 in. min.

CORNER, GATE, BRACE POSTS: Wood L = \_\_\_\_ ft. min.  
D = 4 ft. min.  
Dia. = 6 in. min.

ENERGIZERS: 110-volt or 220-volt line-powered  
12-volt battery solar-powered

FASTENERS: Porcelain insulators  
Plastic insulators

WIRE: 12 1/2 gauge high tensile  
Galvanizing shall be at least class III as per ASTM A121  
Fence height H = \_\_\_\_ ft. min.  
Number of wires \_\_\_\_  
Wire Spacing from ground line (in) \_\_\_\_\_

SPACER/BATTEN: Wood  
Fiberglass  
Max. spacing interval \_\_\_\_ ft.

SPECIES for all wood: Red or White Cedar  
Black Locust  
Any pressure treated species

SPECIAL INSTRUCTIONS:

\_\_\_\_\_

\_\_\_\_\_

Drawing not to scale. Standardized drawing must be adapted to the specific site.