# CORRUGATED ALUMINUM RISER – NONPERFORATED

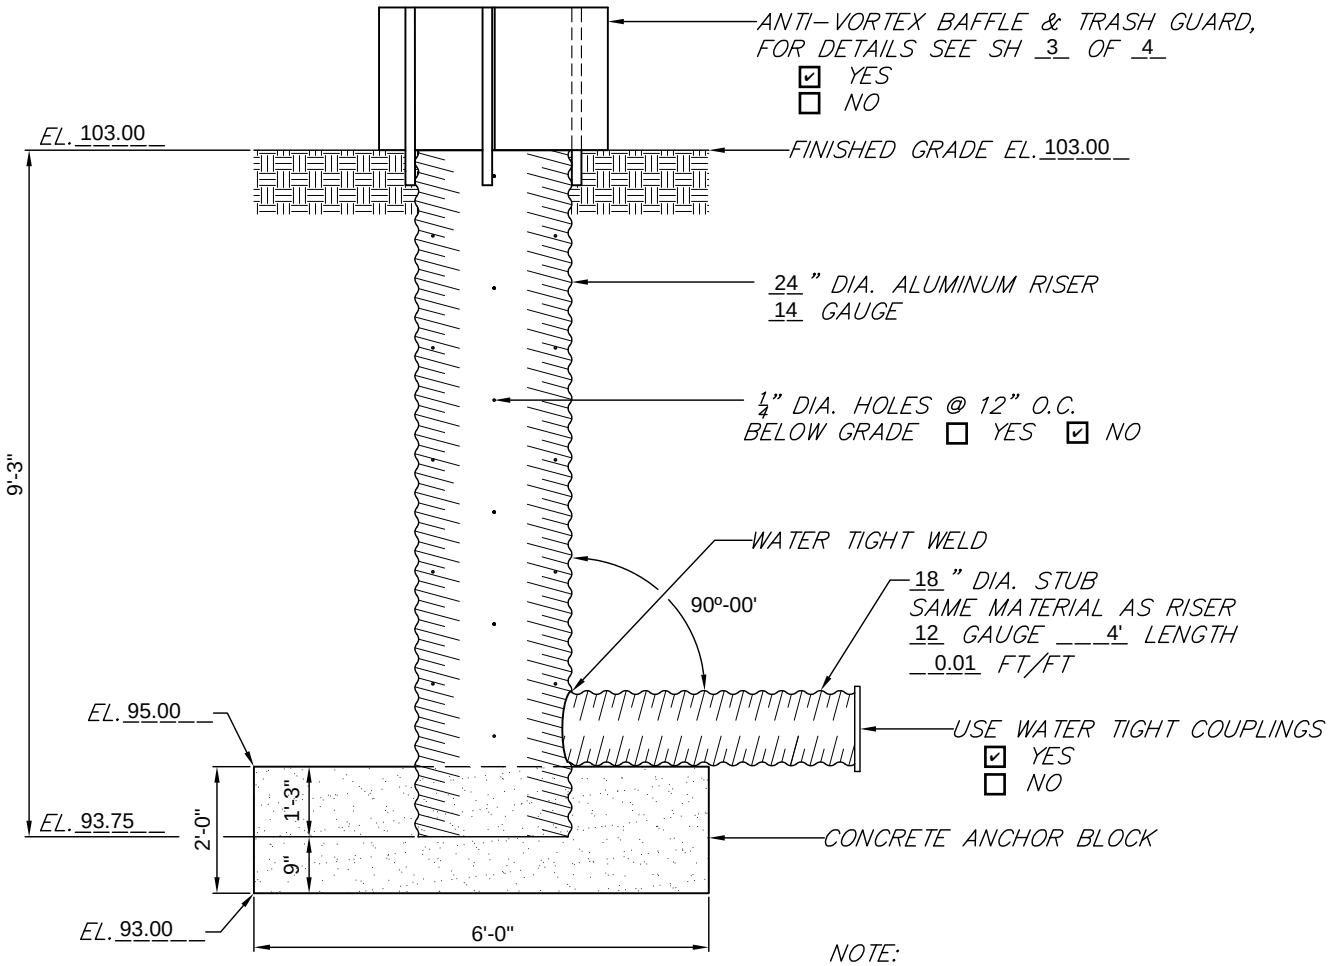


NOTE:
WATERTIGHT COUPLING BANDS WILL BE USED IN LIEU OF WELDED FLANGES FOR 15" DIA. AND LARGER PIPES.

6 ' x 6 ' x 2 ' ANCHOR BLOCK
3000 PSI CONCRETE
2.7 CU YDS REQ'D
DELIVERED TO THE SITE BY READY MIX TRUCK: _____

## RISER DETAIL

ENGINEERING JOB APPROVAL IV

DRAWING NOT TO SCALE

NRCS
Natural Resources Conservation Service
United States Department of Agriculture

JOE SMITH FARMS
GSS "A"
OBION COUNTY, TENNESSEE
RISER DETAILS

| | | Date |
|---|---|---|
| Designed | BRYAN | 9/13 |
| Drawn | BRYAN | 9/13 |
| Checked | | |
| Approved | | |

FILE NAME

DRAWING NUMBER
TN-ENG-410-1d

Sheet 2 of 4