
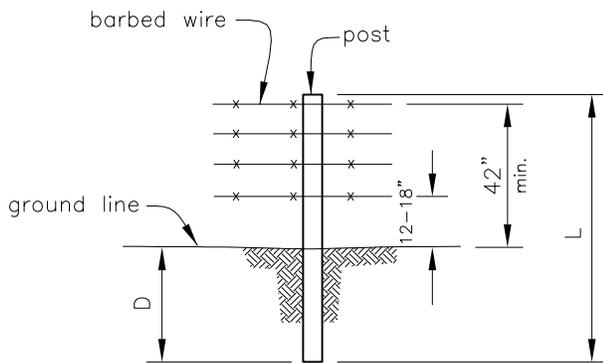


CODE 382 - FENCE
4 or 5 STRAND BARBED WIRE FENCE

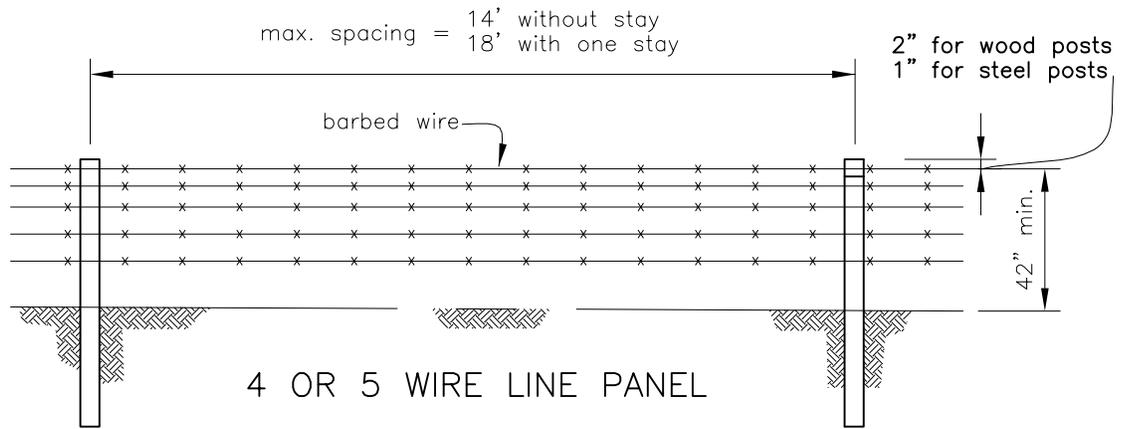

BARBED WIRE DETAIL

BARBED WIRE

12 1/2 gauge conventional or
15 1/2 gauge high-tensile non-electric

2 twisted strands with two-point barbs
on approx. 5 inch centers.

LINE	Wood: L = 6 ft. min. D = 24 in. min. Diameter = 3 in. min.	Steel: L = 5.5 ft. min. D = 18 in. min. Standard "T" > 1.25 lbs/ft
CORNER OR GATE	Wood: L = 7 ft. min. D = 3 ft. min./30" w/concrete Diameter = 6 in. min.	Steel: L = 7 ft. min. D = 30 in. min. (set in concrete) Diameter = Round 2-1/2 in. O.D. (capped) or Angle iron 2.5" x 2.5" x 0.25"
FASTENERS:	Porcelain or UV stabilized plastic insulators	
STAPLES:	9 gauge (min), 1 1/2" w/barbs for softwoods and 1" for hardwoods	
STAYS:	5/8" min. fiberglass, 9.5 gauge wire twist or 1"x1.5" high density wood	

EXCEPTIONS:

1. Live trees with 6" diameter (min.) may be used for corners, bracing and line posts.
2. Treated 2x4 shall be nailed to tree for separation.
3. See construction specification (382) for further details and options.