



CODE 382 - FENCE
NON-ELECTRIC HIGH TENSILE FENCE

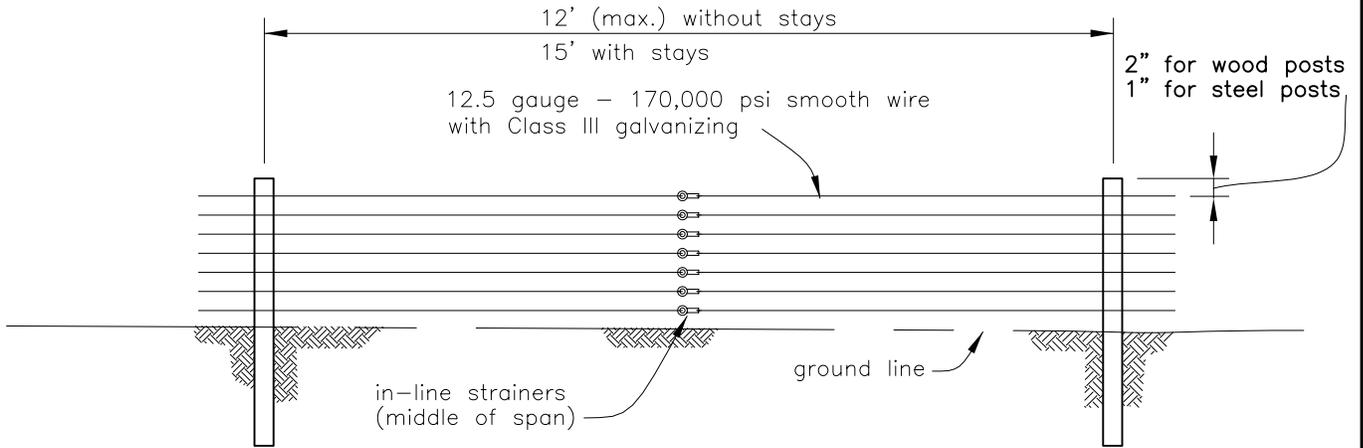

TYPICAL BOUNDARY LINE PANEL

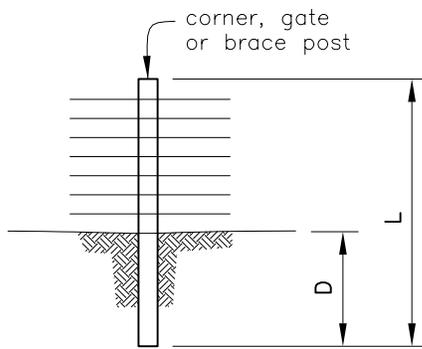

DETAIL

Recommended Wire Spacing

Wires	Purpose	Spacing from ground (inches)
6+	Cross Fencing	12,18,24,30,36,42
7+	Boundary Fencing	6,12,18,24,30,36,42

LINE POSTS: Steel (> 1.25 lb/ft)
Wood (3 in. dia. min.)
*Do not use landscape timbers

L = 5.5 ft. min. D=18 in. min.
L = 6 ft. min. D=24 in. min.

CORNER, GATE,
BRACE POSTS: Steel (2.5" dia. min. w/cap)
Wood (6" dia. min.)

L = 6.5 ft. min. D=30 in. with concrete
L = 7 ft. min. D=36 in. min.

STAPLES: 9 gauge (min), 1 1/2" w/barbs for softwoods and 1" for hardwoods

STAYS: 5/8" min. fiberglass or 1"x1.5" high density wood

EXCEPTIONS:

1. Live trees may be used for corners, bracing and line posts.
2. For corners, do not tie wire around tree, instead thread wire(s) through 6" lag eye bolt(s) in tree. For line posts, use treated 2x4 to separate wire from tree.
3. See construction specification (382) for further details and options.

Drawing not to scale. Standardized drawing must be adapted to the specific site.