



- NOTES FOR COUPLING BANDS:**
1. Materials and coatings of watertight couplings bands, sleeve joint and helical metal bands shall be the same as that specified for the pipe.
 2. All tank lugs, rods and nuts shall be galvanized steel. Where aluminum bands are used, the rods and lugs shall be separated from the aluminum bands by at least two layers of 2" wide plastic tape with a total thickness of 24 mils or more.
 3. Corrugated metal coupling bands may be fabricated from one or two pieces with equal minimum lap lengths.

ELEVATION SECTION B-B

DETAILS OF WATERTIGHT COUPLING BAND FOR ANNULAR PIPE

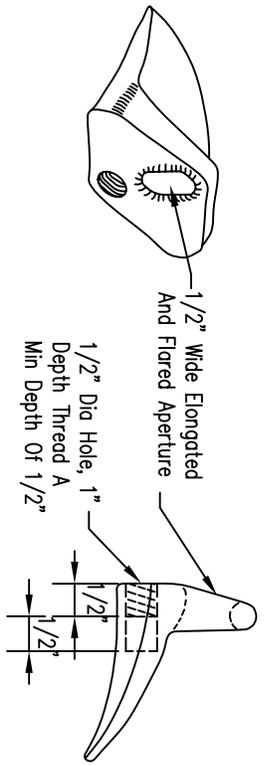

ISOMETRIC VIEW

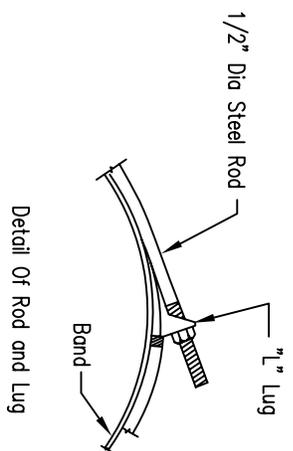

ELEVATION

ALTERNATE "L" LUG

ALTERNATE "L" LUG

Landowner	Location
Drawing adapted from Illinois	

 <p>NRCS Natural Resources Conservation Service</p>	<p>APPURTENANCES FOR CORRUGATED METAL PIPE STRUCTURES</p>		<p>Designed _____</p> <p>Drawn <u>M. QUINONES</u> 9/19/01</p> <p>Checked _____</p> <p>Approved _____</p>	<p>Date</p>
	<p>File No. TN-ENG-200A</p> <p>Drawing No.</p>	<p>Sheet 1 of 3</p>		