


# Waste Storage Facility Flow Chart

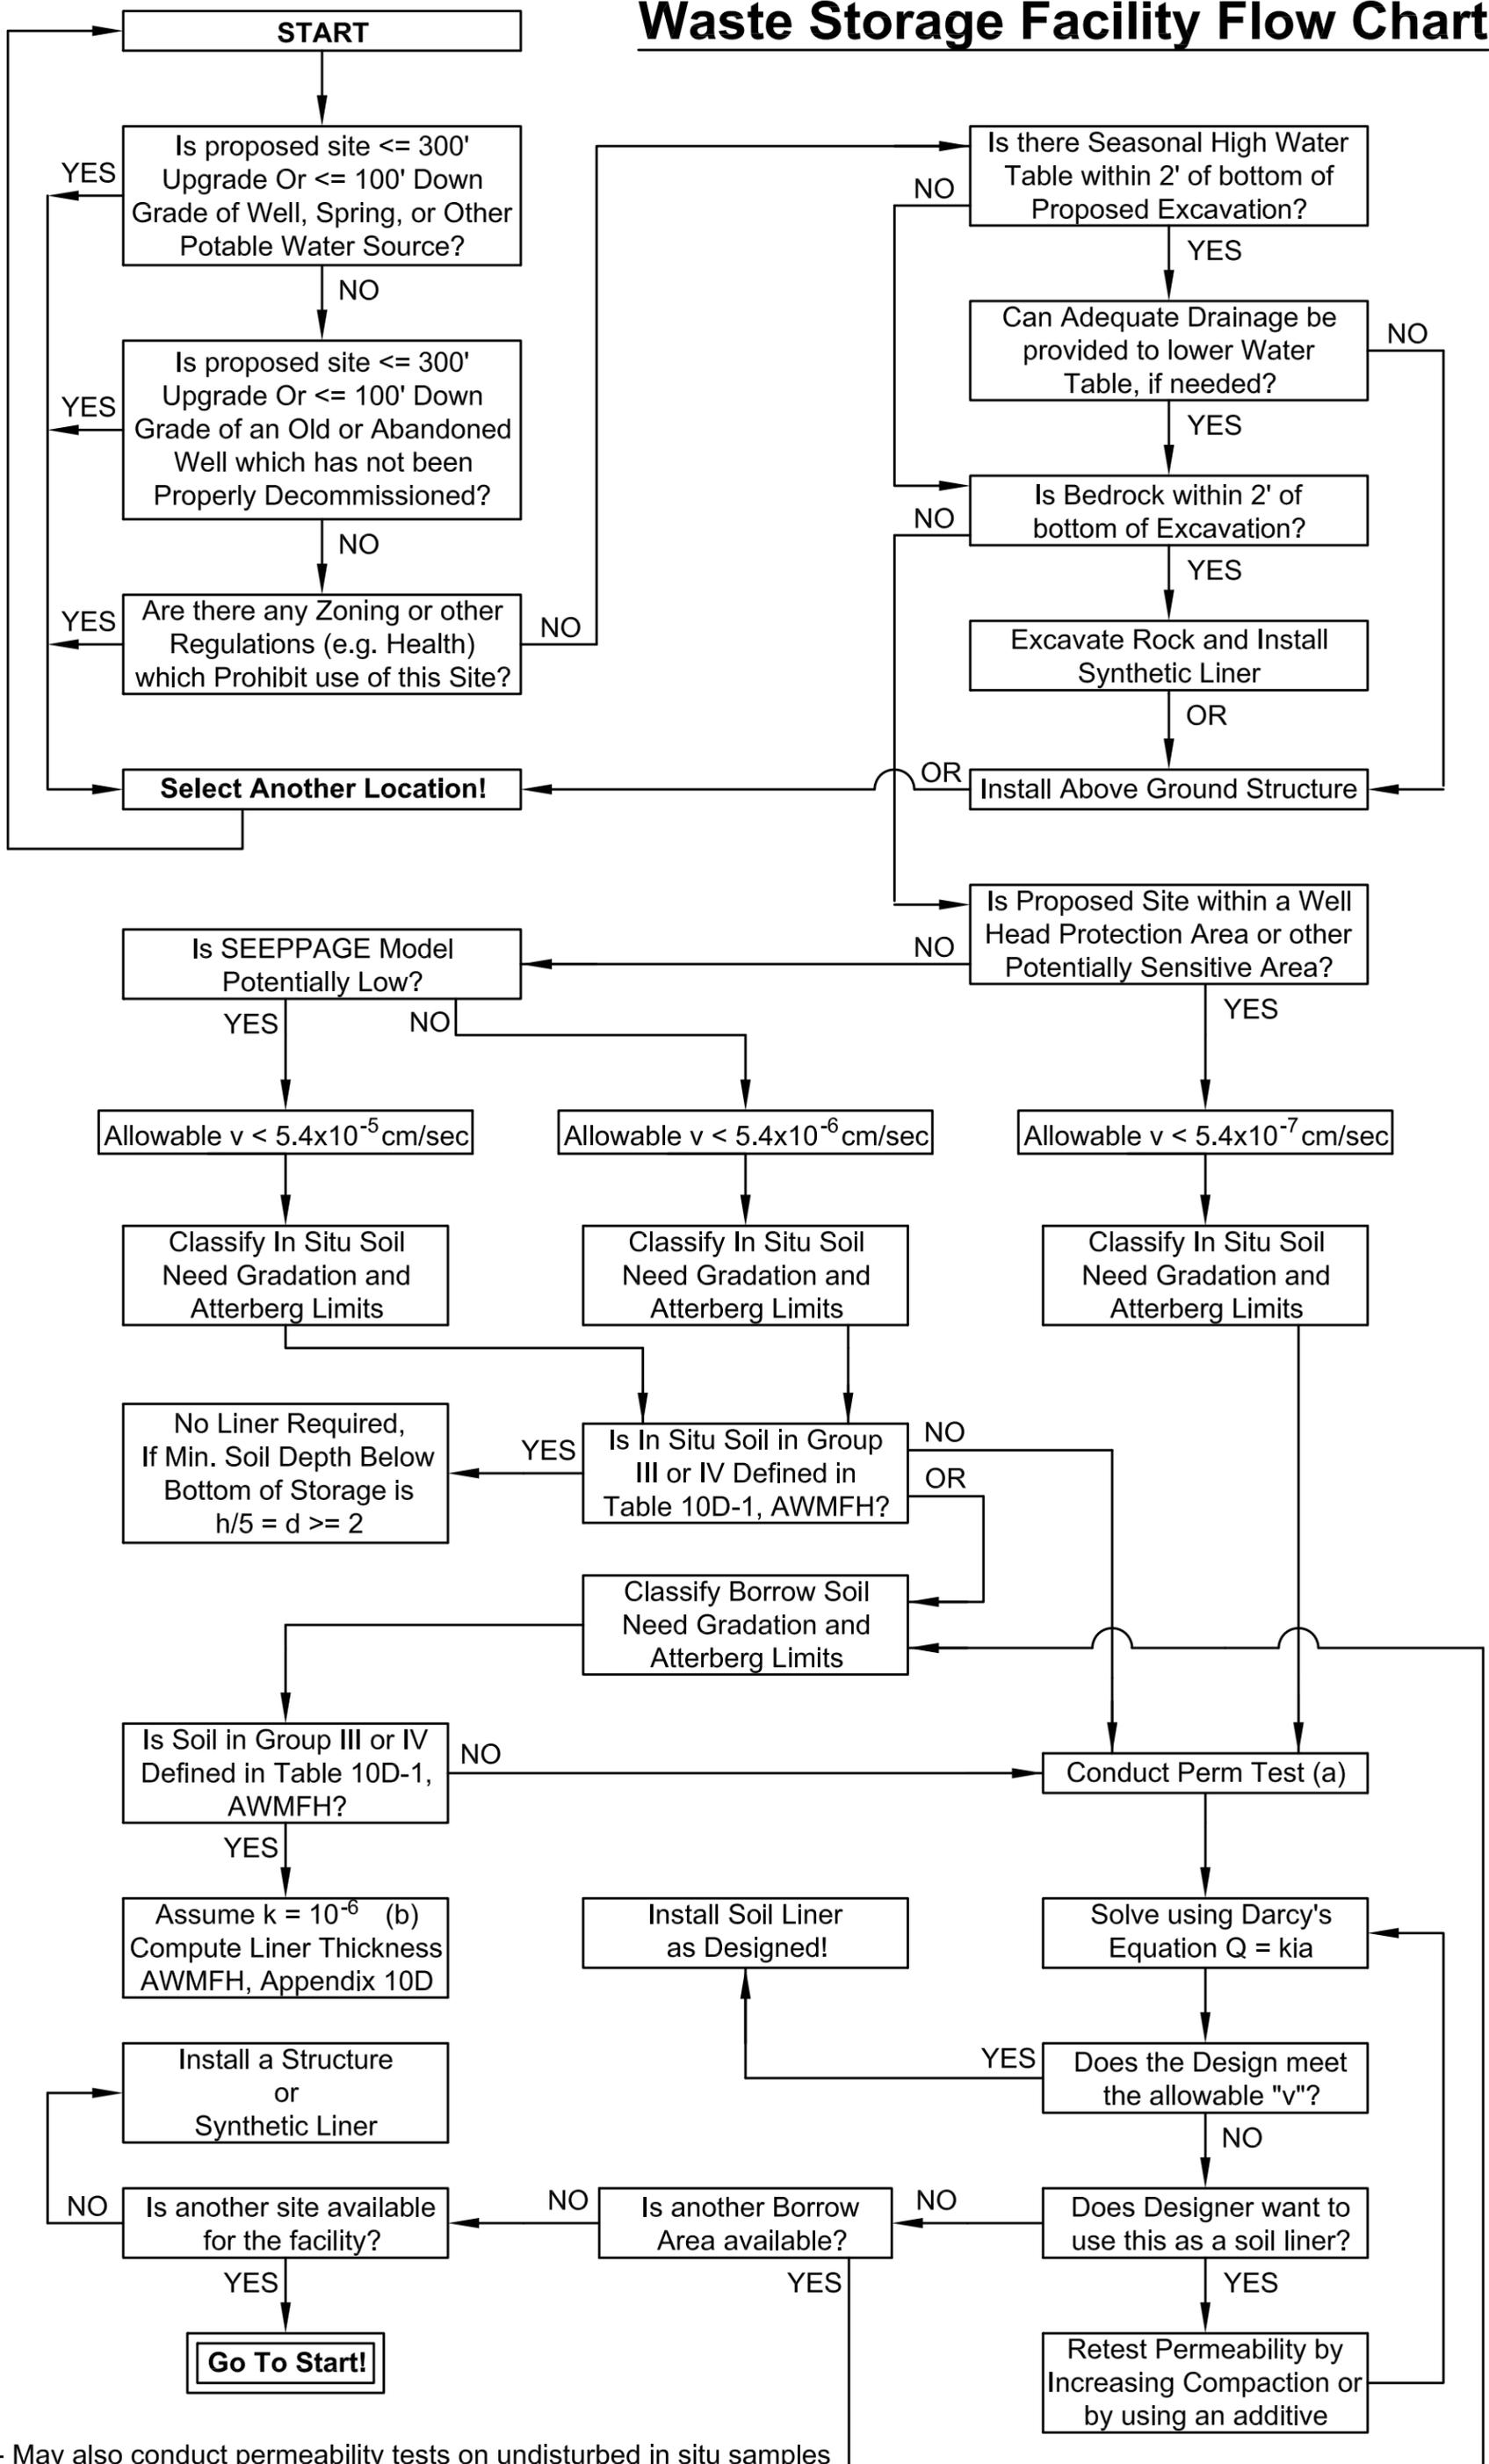

(a) - May also conduct permeability tests on undisturbed in situ samples  
 (b) - 95% Proctor at 0 to +3% of Optimum Moisture  
 v - Specific Discharge (cm/sec)  
 k - Coefficient of Permeability (cm/sec) - Obtained through Lab Test  
 d - Depth of Soil Liner (Feet)  
 h - Total Storage Depth (Feet)