



TYPICAL CONCRETE COMPOST PAD DETAIL

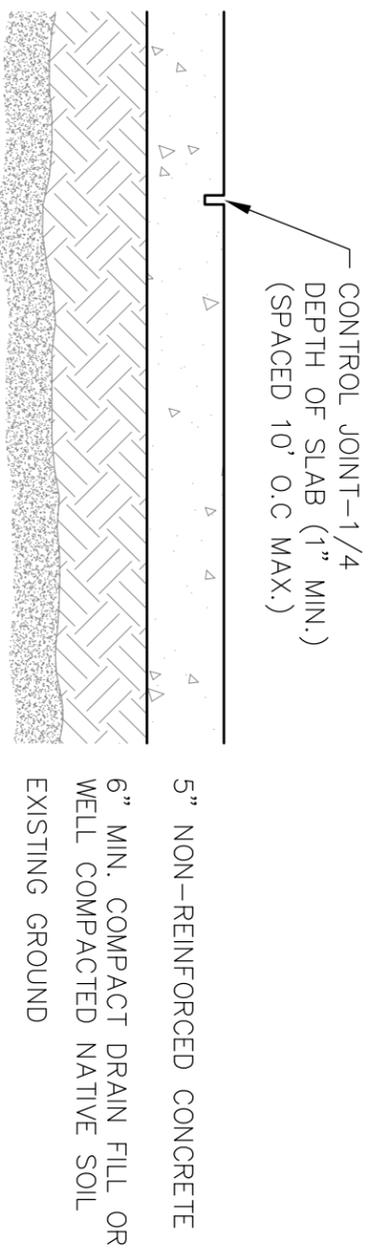

TYPICAL COMPOST PAD SECTION

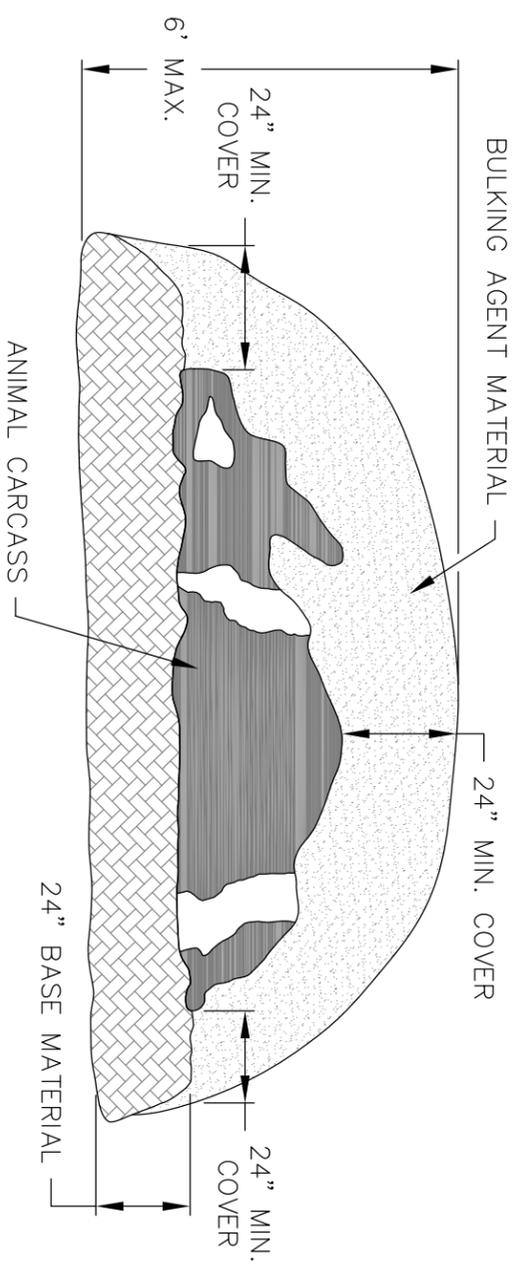


CONSTRUCTION NOTES

1. ALL ITEMS SHALL BE CONSTRUCTED TO THE DIMENSIONS AND ELEVATIONS SHOWN ON THE DRAWINGS. ANY CHANGES SHALL BE APPROVED BY THE NRCS REPRESENTATIVE ON SITE.
2. NRCS SHALL BE NOTIFIED AT LEAST 2 DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION OF THE COMPOST PAD.
3. STRIP ALL TOPSOIL AND ORGANIC MATTER PRIOR TO CONSTRUCTION OF THE PAD.
4. INSTALL SURFACE DRAINAGE IF DETERMINED BY NRCS THAT IT IS NEEDED.
5. CONCRETE SLAB SHALL BE PLACED AT A 3-5" SLUMP WHEN THAT DAY'S MAXIMUM TEMPERATURE WILL BE LESS THAN 85°F. FOR TEMPERATURES GREATER THAN 85°F, THE CONTRACTOR SHALL CONTACT NRCS FOR GUIDANCE. A WATER REDUCER CAN BE USED TO INCREASE THE SLUMP.
6. CURING COMPOUND SHALL BE APPLIED TO CONCRETE IN ACCORDANCE WITH CONSTRUCTION SPECIFICATION #31.

BULKING AGENT MATERIAL: _____
 BASE MATERIAL: _____

PLAN VIEW

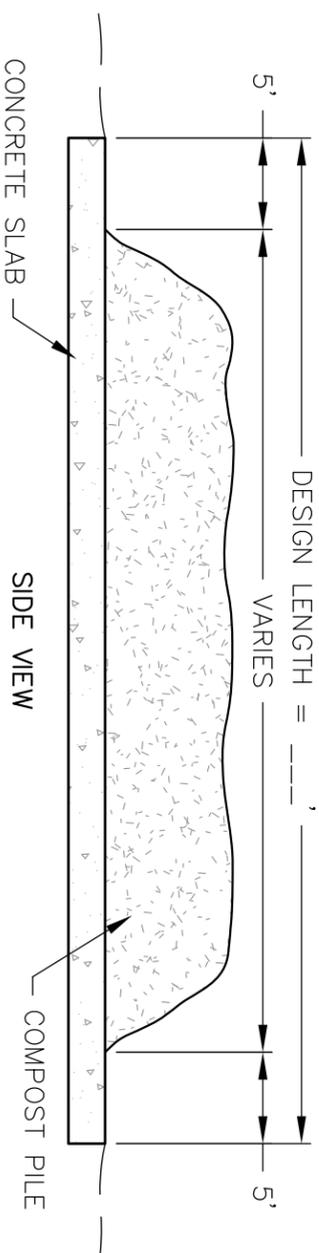


BILL OF MATERIALS

ITEM #	ITEM	QUANTITY	UNIT	CONSTRUCTION SPECIFICATIONS
1.	EARTHWORK		C.Y.	11
2.	CONCRETE		C.Y.	31
3.	SEED & MULCH		AC.	52



Dig Safe System, Inc.
It's Smart, It's Easy, It's the Law.
1-888-DIG-SAFE
 (888) 344-7233
 digsafe.com

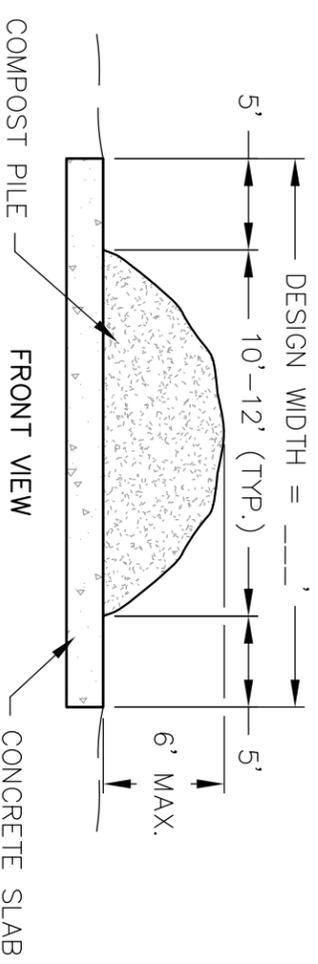

ANIMAL MORTALITY COMPOSTING FACILITY
 TYPICAL DESIGN & NOTES

HAZARD CLASS
 LOW

JOB CLASS



Date _____
 Designed _____
 Drawn JRC _____
 Checked _____
 Approved by _____

VERMONT