



TYPICAL GRAVEL COMPOST PAD DETAIL

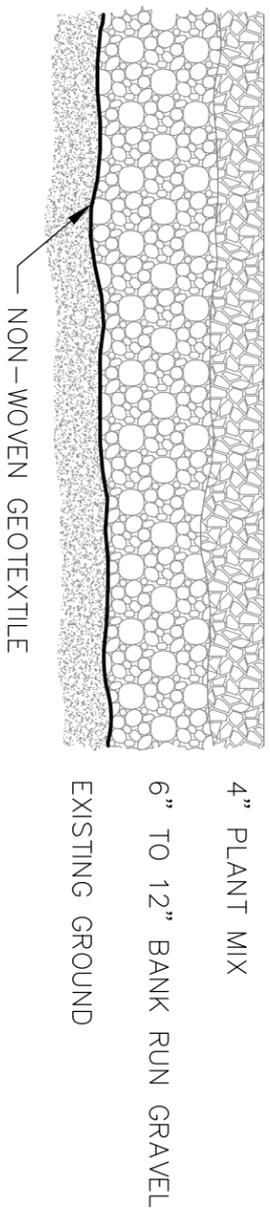

TYPICAL COMPOST PAD SECTION


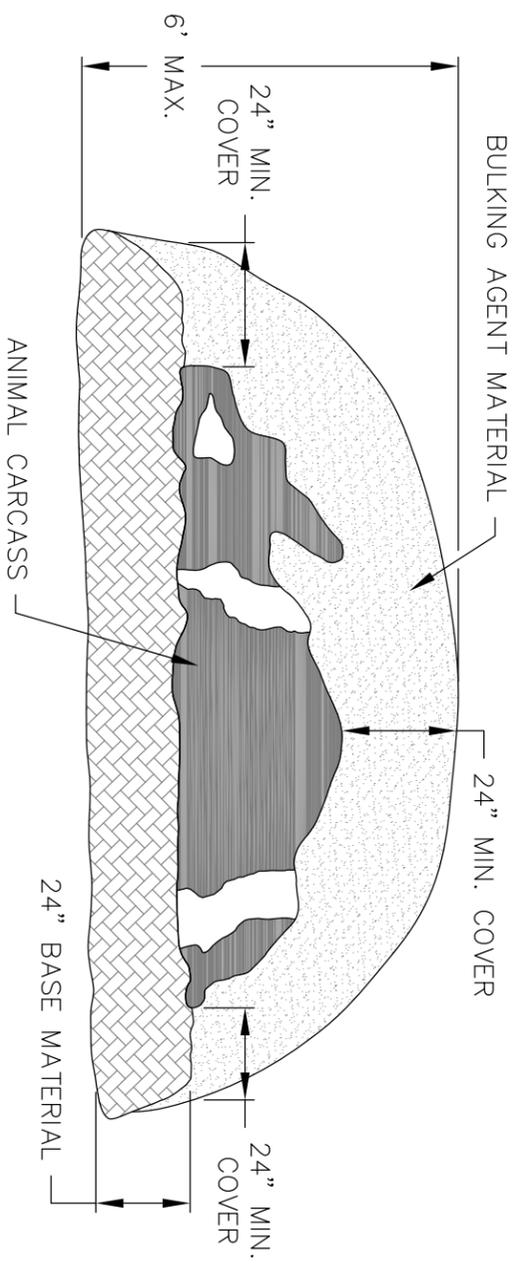


CONSTRUCTION NOTES

1. ALL ITEMS SHALL BE CONSTRUCTED TO THE DIMENSIONS AND ELEVATIONS SHOWN ON THE DRAWINGS. ANY CHANGES SHALL BE APPROVED BY THE NRCS REPRESENTATIVE ON SITE.
2. NRCS SHALL BE NOTIFIED AT LEAST 2 DAYS PRIOR TO THE BEGINNING OF CONSTRUCTION OF THE COMPOST PAD.
3. STRIP ALL TOPSOIL AND ORGANIC MATTER PRIOR TO CONSTRUCTION OF THE PAD.
4. INSTALL SURFACE DRAINAGE IF DETERMINED BY NRCS THAT IT IS NEEDED.
5. INSTALL GEOTEXTILE FABRIC BETWEEN GRAVEL BASE AND EXISTING GROUND AS DESCRIBED IN VERMONT CONSTRUCTION SPECIFICATION 54.
6. COMPACT GRAVEL AND PLANT MIX WITH CONTROLLED MOVEMENT OF THE HAULING EQUIPMENT SO THAT THE ENTIRE SURFACE IS TRAVERSED BY NOT LESS THAN ONE TREAD TRACK OF THE LOADED EQUIPMENT.

BULKING AGENT MATERIAL: _____
BASE MATERIAL: _____

PLAN VIEW

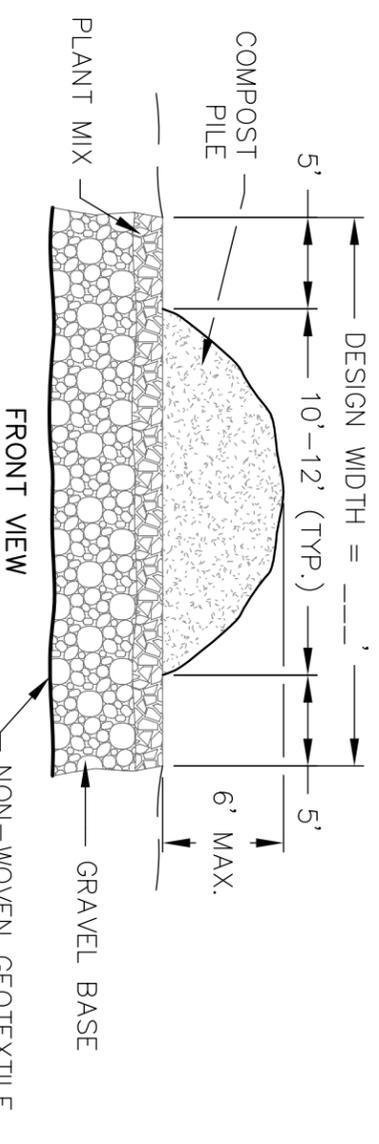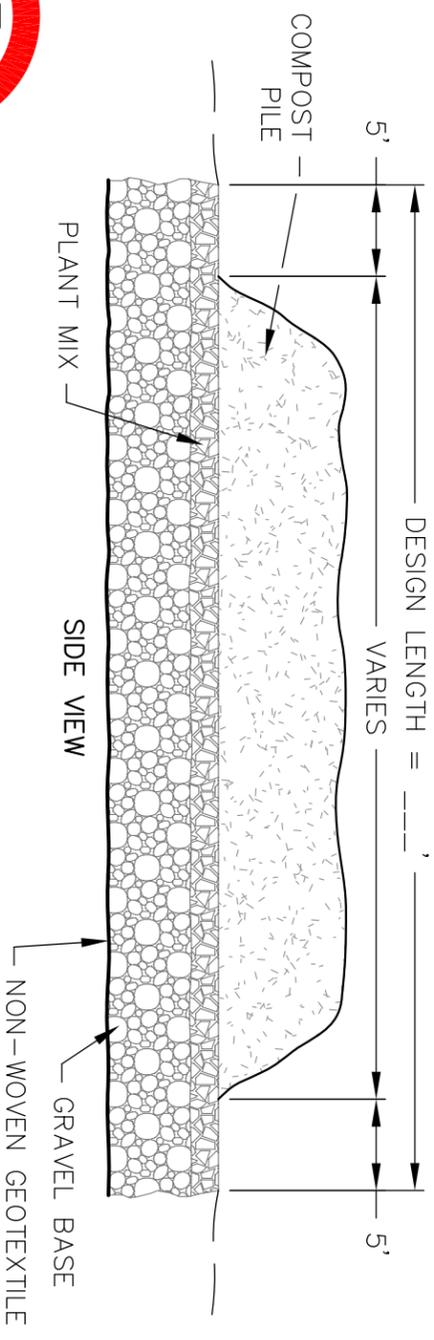

BILL OF MATERIALS

ITEM #	ITEM	QUANTITY	UNIT	CONSTRUCTION SPECIFICATIONS
1.	EARTHWORK		C.Y.	11
2.	GEOTEXTILE		S.Y	54
3.	GRAVEL		C.Y.	5, 11
4.	PLANT MIX		C.Y.	5, 11
6.	SEED & MULCH		AC.	52



Dig Safe System, Inc.
It's Smart, It's Easy, It's the Law.
1-888-DIG-SAFE
(888) 344-7233
digsafe.com

Date

4-11

Designed _____

Drawn JRC

Checked _____

Approved by _____



Natural Resources Conservation Service
United States Department of Agriculture

HAZARD CLASS
LOW

JOB CLASS

ANIMAL MORTALITY COMPOSTING FACILITY
TYPICAL DESIGN & NOTES

VERMONT

File Name

Drawing Name

Sheet 1 of 1

