

VERMONT CONSTRUCTION SPECIFICATION

50BW – FENCE, STANDARD BARBED WIRE

1. Scope

The work shall consist of furnishing and installing standard barbed wire fence and related essential components.

2. Materials

Waste Storage Facilities: Barbed wire fence installed around waste storage facilities and other high hazard areas shall have a minimum of five strands of barbed wire with the top strand 48 inches above the ground line.

Pasture/Grazing/Use Exclusion: For all other uses the height, number of strands and wire spacing of barbed wire fence will be determined by the on site NRCS representative with the proper design approval authority.

A. Wire

All wire shall be new and consist of 2 twisted strands of 12.5 gauge steel wire with class 3 galvanizing or 2 twisted strands of 15.5 gauge high tensile wire with class 3 galvanizing. Barbs shall be 4 point on 5 inch centers.

B. Fasteners

Staples shall be of 9 gauge class 3 galvanized steel or heavier with a minimum length of 1-3/4 inches for soft wood post or 1 inch for close grain hardwood posts.

Manufacturer's clips or 14 gauge class 3 galvanized wire may be used to fasten wires to steel posts.

C. Posts

Wood. All wooden posts and brace members shall be red cedar, black locust, or pressure treated. Pressure treated posts shall be treated with a minimum of 0.40 lbs/cubic foot of chromated copper arsenate (CCA) Type A, B, or C; or ammoniated copper quat (ACQ) preservative by a method to ensure that complete penetration of the sap wood is obtained. Quality of treated wood shall provide sufficient strength and last the expected life of the fence. All bark shall be removed from red cedar and black locust posts. At least half of the diameter of the red cedar shall be heartwood.

All corner, end, pull and gate assembly posts shall be wooden with a minimum diameter of 6 inches. Assembly post shall be a minimum of 9 feet long for single H-brace assemblies and 8 feet long for double H-brace assemblies.

Line posts shall be at least 4 inches in diameter. Wood line posts shall be a minimum length of 7 feet.

Plastic. Plastic line post shall be at least 4 inches in diameter, able to accept and hold staples, and be durable for the life of the fence. Plastic line post shall be a minimum length of 7 feet.

Steel. Steel line post shall have the standard "T" section, nominal dimensions of 1-3/8" x 1-3/8" x 1/8" with anchor plate. The post shall weigh at least 1.25 pounds per length and painted with weather resistant paint. The post shall be studded to aid in wire attachment. Steel line posts shall be a minimum length of 6 feet.

VERMONT CONSTRUCTION SPECIFICATION

Other. Other materials may be used for line and assembly posts if they are equal or greater in strength and quality of above. Other materials must be approved by the engineer.

3. Construction

A. Post Installation and Spacing.

Live trees used for corner, bracing, and line posts shall have a diameter breast height (DBH) equal to or greater than what is required for normal wooden posts. Some alignment variations shall be allowed, but caution should be taken to minimize offsets and prevent excess fence needs. Wire or insulators will not be fastened directly to trees. A board or boards will be placed on the tree to keep the wire from contacting the bark. Wire shall not be wrapped around the tree. A CCA treated 2"x6" board, fiberglass strip, plastic strip, or an untreated red cedar or white oak board with a minimum size of 1"x4" must be securely fastened to the tree with at least three 40 lbs pole barn nails. The board must be long enough to accommodate the wire. The fence will be fastened to the board with staples

B. Corner, End, Pull and Gate Assemblies.

If the posts are to be set or driven to four feet below the ground line, a single H-brace assembly shall be used.

If the posts are to be set or driven to three feet below the ground line, a double H-brace assembly shall be used.

Bracing is required at all corner, gates, pull, and end assemblies.

All brace members shall be wood and the member centerline shall be 4 to 9 inches below the top of the post. Other brace materials maybe used as approved by the engineer.

The brace member shall be 4 inches in diameter and a minimum of 7 feet in length. A tension member composed of 2 complete loops of 9 gauge smooth wire, 12 gauge double strand wire, or a single loop of 12.5 gauge high tensile strength smooth wire shall be used. One end of the tension member shall be at the height of the horizontal brace member and the other end shall be 4 inches above the ground line on the other posts.

A corner assembly shall be used when the horizontal alignment changes more than 15 degrees and when the vertical alignment changes more than 15 degrees.

Pull assemblies shall be installed at intervals not to exceed 660 feet. The continuity of the wire shall be interrupted at the pull assembly.

C. Line Post.

Wooden and plastic line post shall be set or driven 34 inches below the ground line. If soil depth is less than 28 inches, use standard "T" section posts.

Steel line posts shall be set or drive 23 inches below the ground line.

Post spacing for line posts shall be a maximum of 16 feet.

If posts are not driven, the backfill around the post shall be thoroughly compacted.

In areas where soil depth restricts the required embedment depth, additional anchors or deadman applied against the direction of pull, shall be used.

VERMONT CONSTRUCTION SPECIFICATION

D. Wire Spacing and Fasteners.

The spacing of barbed wire shall be 12, 9, 9, 9, and 9 inches, starting at the ground line.

The top wire shall be at least 2 inches below the top of wooden posts and 1 inch below the top of steel posts

The tension on the high tensile barbed wire should be 200 to 250 lbs. on each strand. Tension will be applied with an in-line stretcher on each strand. To gauge tension, install a tension spring on at least one strand of wire.



Staples shall be driven diagonally to the wood's grain and at a slight downward angle, (upward if pull is up) to avoid splitting the post and loosening of the staple. Space should be left between the inside crown of the staple and the post to permit free movement of wire. Barbed staples shall be used for pressure treated posts.

Wires may be attached to steel posts by manufacturer's clips or by two turns of 14 gauge galvanized wire.

Wire shall be spliced by means of "Western Union" splice or by suitable splice sleeves applied with a tool design for the purpose. The "Western Union" splice shall have not less than 8 wraps at each end about the other. All wraps shall be tightly wound and closely spaced.

E. Grounding.

Non-electric wire fences using wood posts shall be grounded at least every 1000 feet. Ground rods should be driven not less than 4 feet into the ground. The rods shall be galvanized steel and a minimum of ½ inch in diameter. All line wires of the fence must be grounded. Alternate grounding materials may be used with the approval of the engineer.

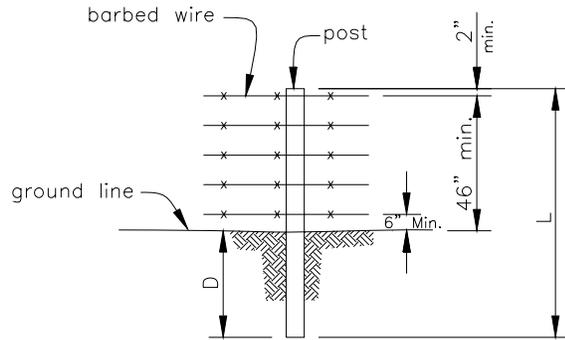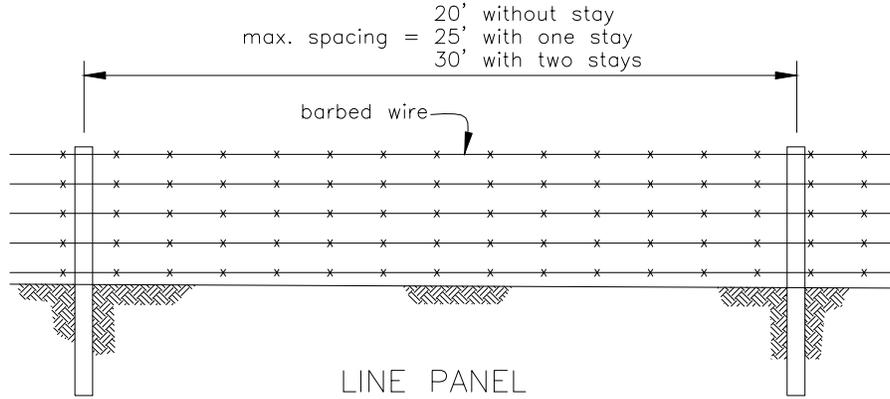

BARBED WIRE 12 1/2 gauge conventional or 15 1/2 gauge high-tension

2 twisted strands with 14 gauge or heavier two-point barbs on approx. 5 inch centers.

Class 1 (min. or equiv.) zinc-coating as per ASTM A-121.

LINE Wood: L = 6 ft. min.
D = 24 in. min.
Dia. = 3 in. min.

CORNER OR GATE Wood: L = 7 ft. min.
D = 3 ft. min.
Dia. = 6 in. min.


STAYS Wood: 1-1/2 in. dia. min. of durable wood
Fiberglass: Any manufactured for this purpose
Wire: 9 1/2 gauge, zinc coated, twisted, manufactured for this purpose

SPECIES for all wood: White Cedar, Black Locust, or Any Pressure Treated Species

SPECIAL INSTRUCTIONS


Drawing not to scale. Standardized drawing must be adapted to the specific site.

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS	Date
	CAD FILE NO.	Designed _____
	SHEET OF	Drawn _____
		Checked _____
		Approved _____

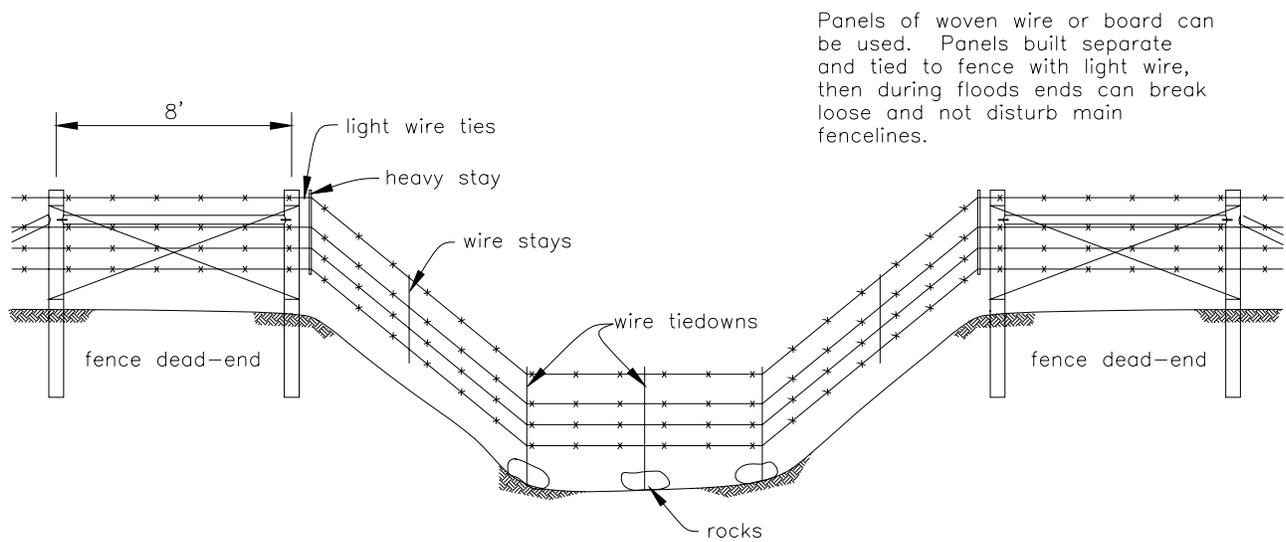


Panels of woven wire or board can be used. Panels built separate and tied to fence with light wire, then during floods ends can break loose and not disturb main fencelines.

DETACHABLE WIRE PANEL W/ROCK ANCHORS
FOR DEEP WASHES AND LIVE STREAMS

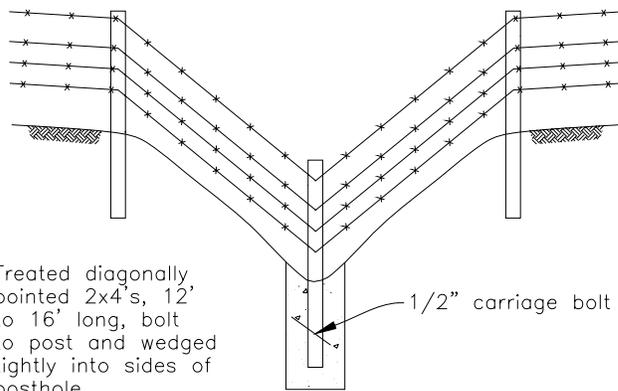


FENCE POST ANCHOR

1. All corner and brace posts shall be 7' long and 3' embedment.
2. Line posts shall have a minimum length of 6'-6" and 2'-6" embedment.

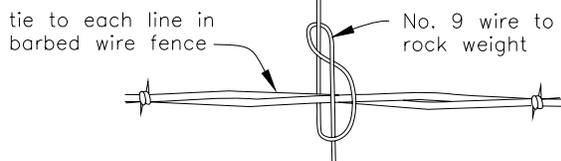

TIEDOWN DETAIL

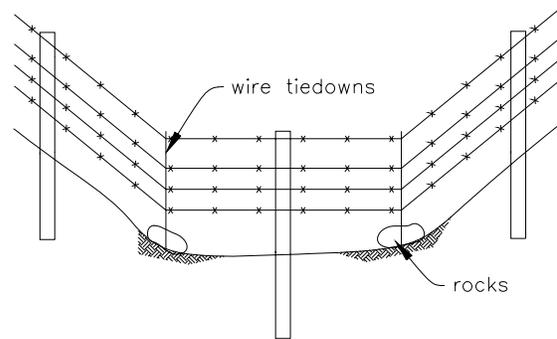


ROCK ANCHORS IN DRY DRAWS
SQUARE ROCK CRIBS ALSO USEFUL


Drawing not to scale. Standardized drawing must be adapted to the specific site.

JOB CLASS		CLASS	Date
CAD FILE NO.		FILE	Designed _____
SHEET OF			Drawn _____
			Checked _____
			Approved _____


U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE

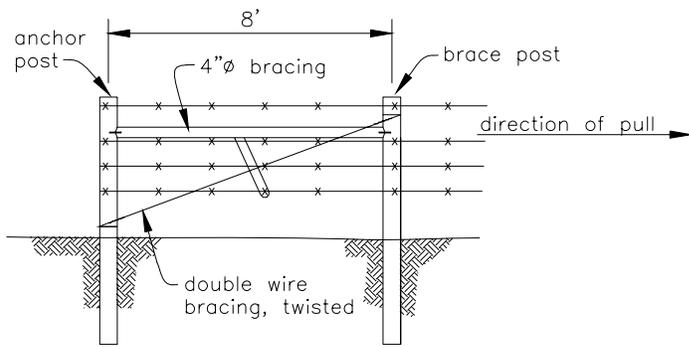

1-SPAN END

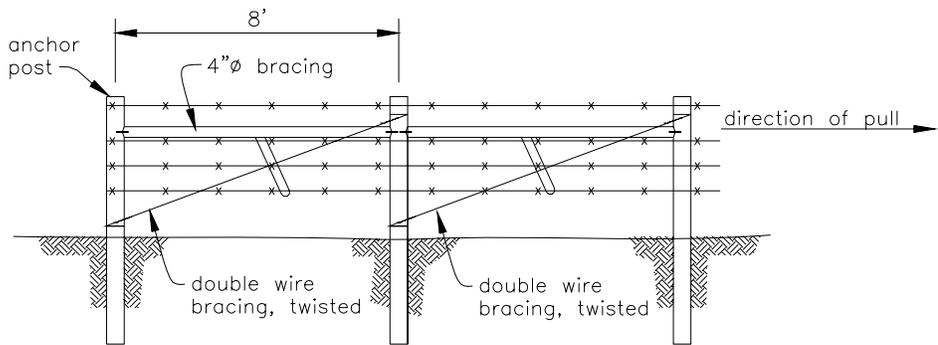

2-SPAN END

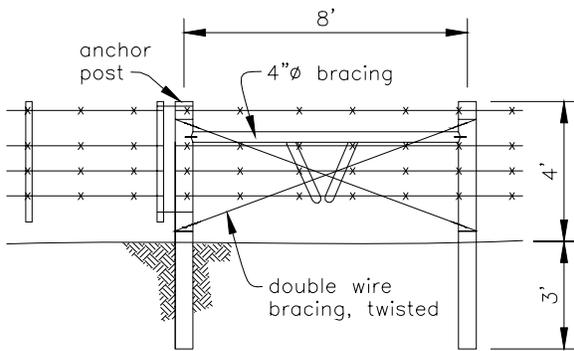


GATE BRACE


1. Double wrap all bracing.
2. All brace posts to be 7' long, 3' embedment.
3. Dap braces into posts.
4. Spike braces to posts.

Drawing not to scale. Standardized drawing must be adapted to the specific site.


JOB CLASS	CLASS	Date
CAD FILE NO.	FILE	Designed _____
SHEET	OF	Drawn _____
U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE		Checked _____
		Approved _____

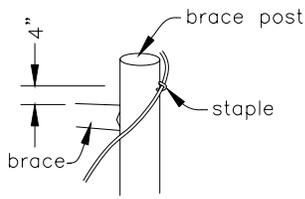


Drive staple about half its length into brace post about 4 inches above brace member on opposite side from brace.

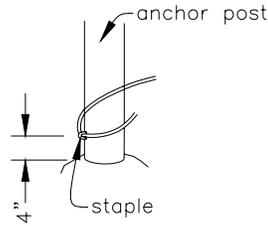


Drive staple in similar manner on anchor post about 4 inches from ground line opposite side of brace.

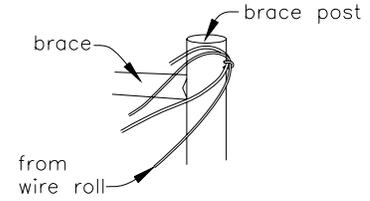


Unroll enough brace wire for two complete loops around anchor and brace post.





Thread end of brace wire through one staple and then through the other. Repeat to from three wire strands.

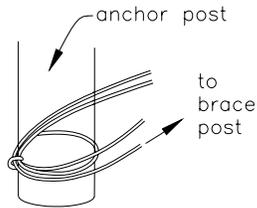

Wrap wire around anchor post and return toward brace post.

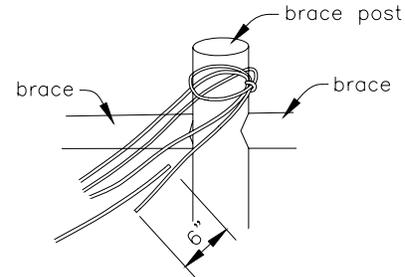


Cut brace wire from roll allowing enough wire to wrap around brace post and extend 6 to 12 inches past other wire end. Make splice.

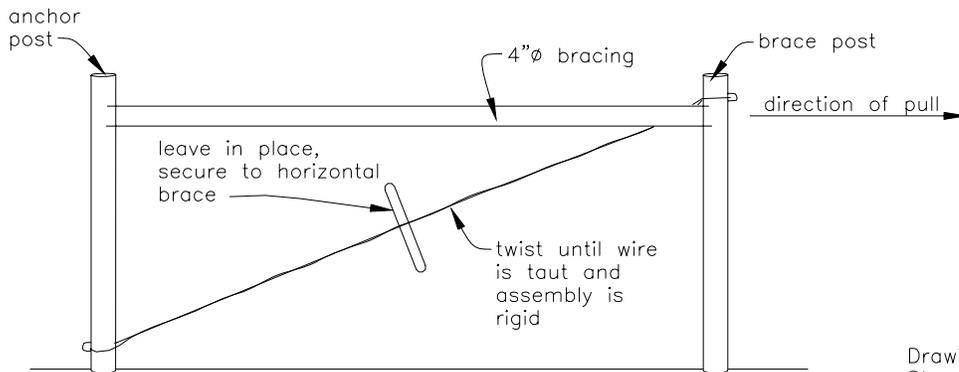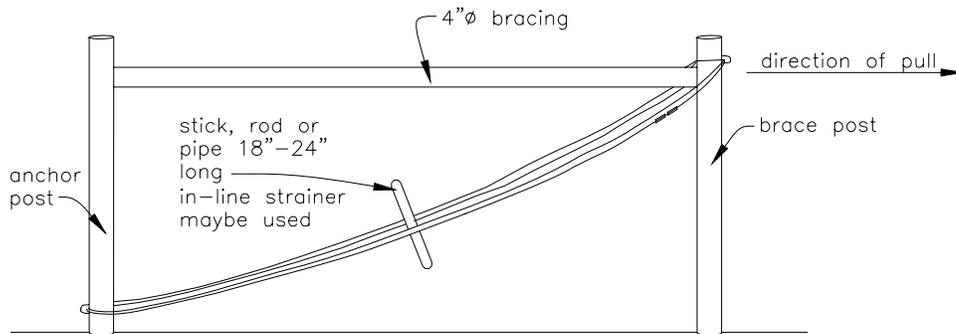

BRACE


Drawing not to scale. Standardized drawing must be adapted to the specific site.

JOB CLASS	CLASS	Date
CAD FILE NO.	FILE	Designed _____
SHEET	OF	Drawn _____
U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE		Checked _____
		Approved _____

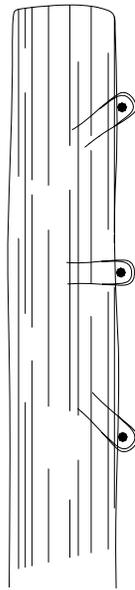


(WIRE PULL IS DOWN)


DRIVE
STAPLES
AT ANGLE

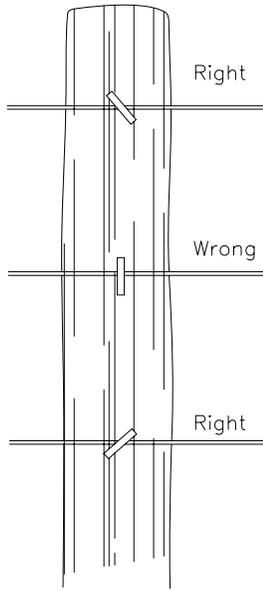


DO NOT DRIVE
STAPLES PARALLEL
TO SIDE OF POST

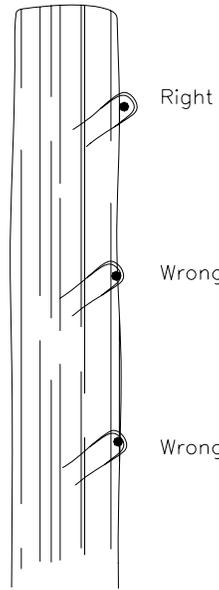

LEAVE
WIRE LOOSE
IN STAPLE






a) No. 9 gauge bright
U-shaped staple,
1-3/4"

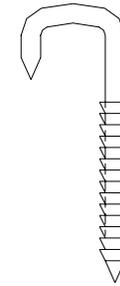

b) No. 9 gauge bright
L-shaped deformed
shank staple, 1-1/2"

ATTACHMENT

STAPLES

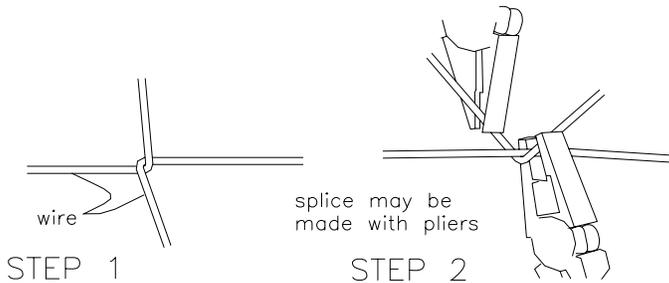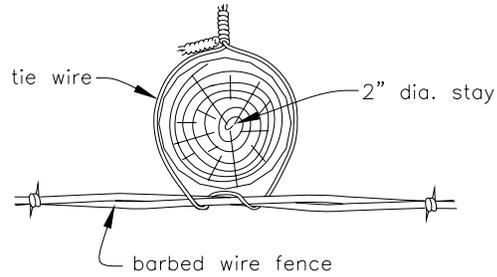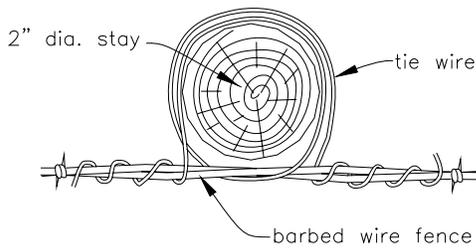

"WESTERN UNION" SPLICE

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS	CLASS	Date
	CAD FILE NO.	FILE	Designed _____
	SHEET	OF	Drawn _____
			Checked _____
		Approved _____	