PLAN VIEW

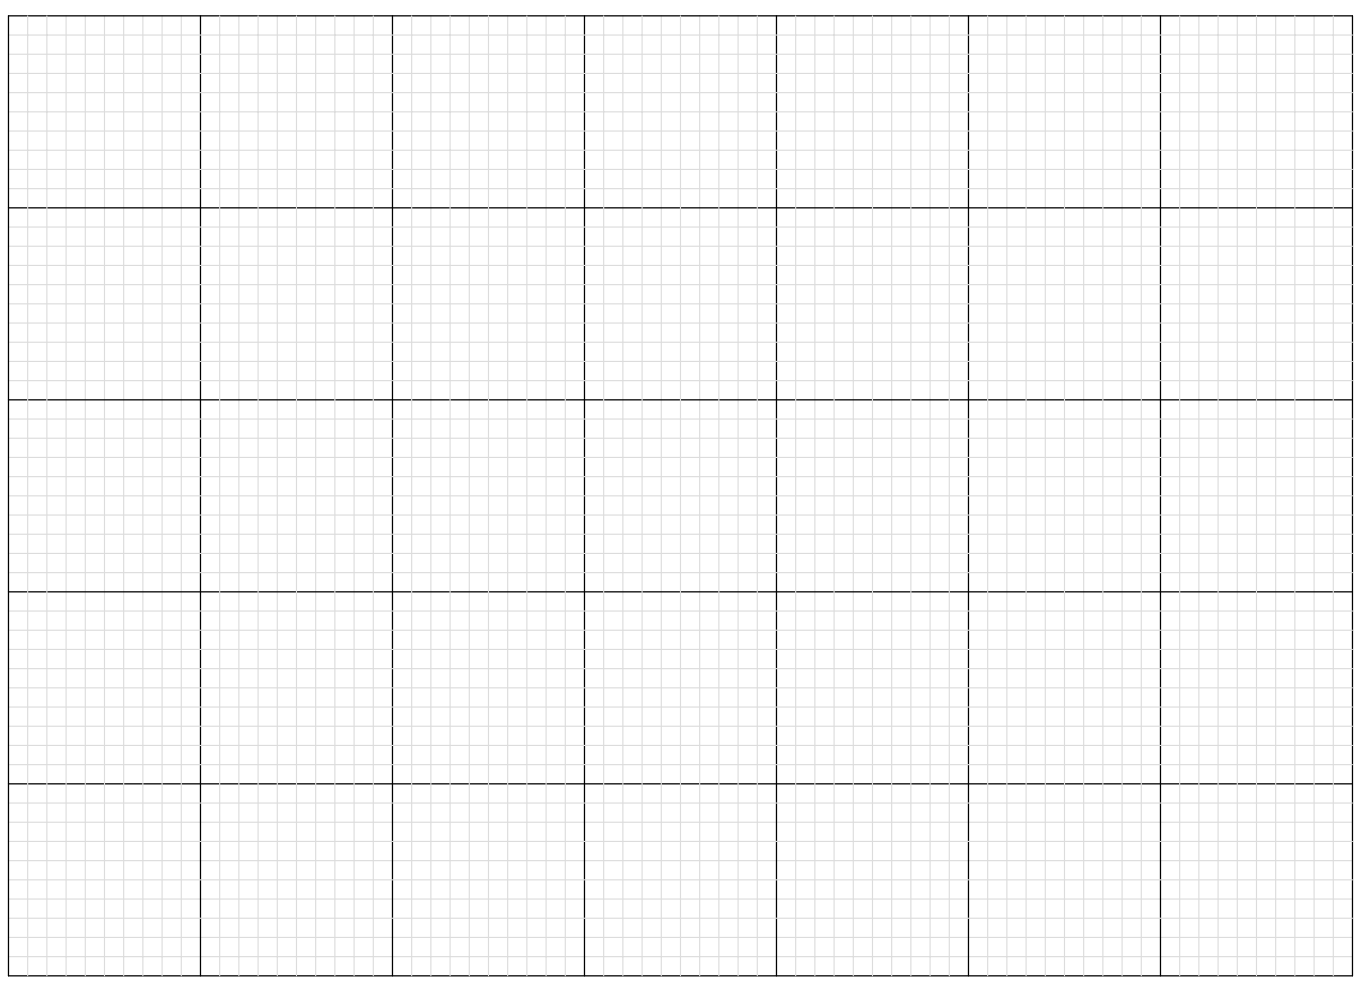

ACCESS ROAD TYPICAL

LENGTH OF ACCESS: ____

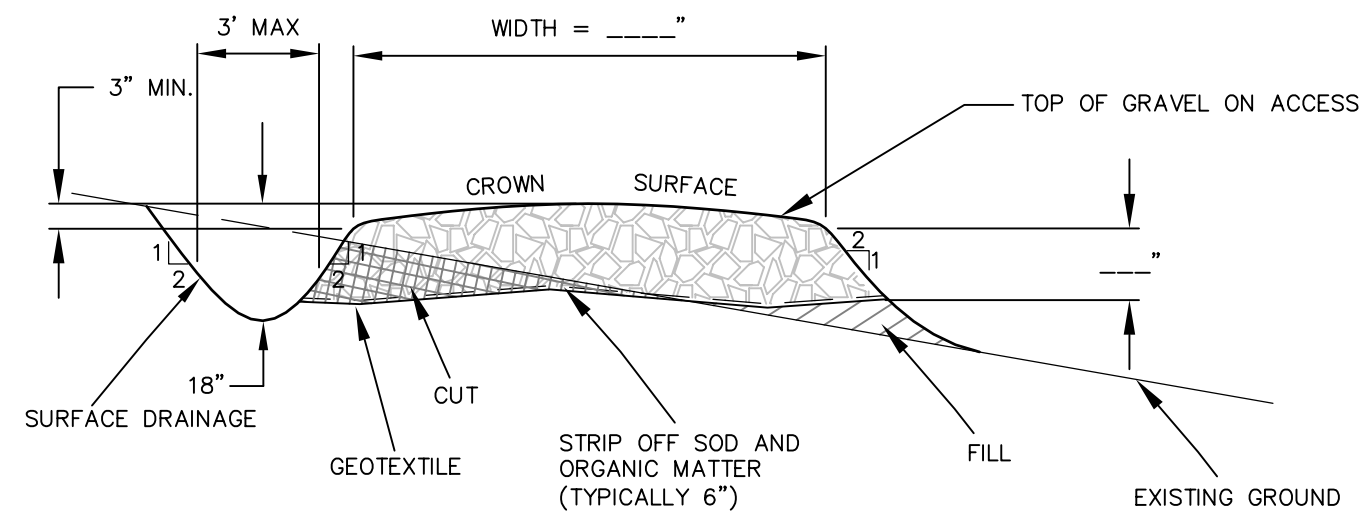

NOTES:

1. FOR AGRICULTURAL ACCESS ROADS, MINIMUM WIDTHS OF 12' ARE ACCEPTABLE ON TANGENTS WITH FAIRLY LEVEL SECTIONS WITHOUT APPRECIABLE DEPTH OF CUT OR FILL. MINIMUM WIDTHS OF 14' SHALL BE USED ON ALL CURVES, SIDE HILL SECTIONS OR AREAS OF SUBSTANTIAL CUT OR FILL.
2. GRADES NORMALLY SHOULD NOT EXCEED 10 % EXCEPT FOR SHORT LENGTHS OF UP TO 50'.
3. STRIP OFF SOD AND ORGANIC MATTER PRIOR TO GRADING ACCESS.
4. INSTALL SURFACE DRAINAGE ON ACCESS IF DETERMINED BY NRCS THAT IT IS NEEDED. INSTALL GEOTEXTILE FABRIC BETWEEN GRAVEL BASE AND EXISTING GROUND AS DESCRIBED IN VERMONT CONSTRUCTION SPECIFICATION 54. USE A GEOTEXTILE FABRIC THAT MEETS THE MATERIAL REQUIREMENTS FOR CLASS IV INSTALLATIONS AS DESCRIBED IN VERMONT MATERIAL SPECIFICATION 219.
5. USE 12" GRAVEL ON ACCESS CROWN TO CENTER OF ACCESS ROAD TO IMPROVE RUNOFF. GRAVEL SHALL BE <5% FINES (PASSING #200 SIEVE) WITH A MAXIMUM SIZE OF 3" NOT TO EXCEED 10% BY VOLUME. COMPACT GRAVEL WITH CONTROLLED MOVEMENT OF THE HAULING EQUIPMENT SO THAT THE ENTIRE SURFACE IS TRAVERSED BY NOT LESS THAN ONE TREAD TRACK OF THE LOADED EQUIPMENT.
6. APPROVE ALL DESIGN CHANGES WITH NRCS.
7. NOTIFY NRCS 2 DAYS PRIOR TO CONSTRUCTION OF ACCESS.

BILL OF MATERIALS

ITEM #	ITEM	QUANTITY	UNIT	CONSTRUCTION SPECIFICATIONS
1.	EARTHWORK		C.Y.	11
2.	GEOTEXTILE		S.Y.	54
3.	GRAVEL		C.Y.	5, 11

Date
Designed
Drawn
Checked
Approved by

NRCS
Natural Resources Conservation Service
United States Department of Agriculture

HAZARD CLASS
LOW

JOB CLASS

AGRICULTURAL ACCESS ROAD

VERMONT

File Name

Drawing Name

Sheet 1 of 1