

**NATURAL RESOURCES CONSERVATION SERVICE
CONSERVATION PRACTICE STANDARD**

LINED WATERWAY OR OUTLET

(feet)
CODE 468

DEFINITION

A waterway or outlet having an erosion-resistant lining of concrete, stone, synthetic turf reinforcement fabrics, or other permanent material.

PURPOSE

This practice may be applied as part of a resource management system to support one or more of the following purposes:

- Provide for safe conveyance of runoff from conservation structures or other water concentrations without causing erosion or flooding
- Stabilize existing and prevent future gully erosion
- Protect and improve water quality

CONDITIONS WHERE PRACTICE APPLIES

This practice applies if the following or similar conditions exist:

1. Concentrated runoff, steep grades, wetness, prolonged base flow, seepage, or piping is such that a lining is needed to control erosion.
2. Use by people or animals precludes vegetation as suitable cover.
3. Limited space is available for design width, which requires higher velocities and lining.
4. Soils are highly erosive or other soil or climatic conditions preclude using vegetation only.

CRITERIA

GENERAL CRITERIA APPLICABLE TO ALL PURPOSES

Capacity. The maximum capacity of the waterway flowing at designed depth shall not exceed 200 ft³/s. The minimum capacity shall be adequate to carry the peak rate of runoff from a 10-year, 24-hour frequency storm. Velocity shall be computed by using Manning’s Formula with a coefficient of roughness “n” as follows:

Lining	“n” Value
Concrete	
Trowel finish.....	0.012 – 0.014
Float finish.....	0.013 – 0.017
Shotcrete.....	0.016 – 0.022
Flagstone.....	0.020 – 0.025
¹ / ₂ Riprap-(Angular Rock)	n=0.047(D ₅₀ S) ^{0.147}
Synthetic Turf Reinforcement Fabrics and Grid Pavers	Manufacturer’s recommendations

¹/₂ Applies on slopes between 2 and 40% with a rock mantle thickness of 2 x D₅₀ where:

D₅₀ = median rock diameter (in.),
S = lined section slope (ft./ft.)
(0.02 ≤ S ≤ 0.4)

Velocity. Maximum design velocity and rock gradation limits for rock riprap-lined channel sections shall be determined using Appendix 16A, *National Engineering Series, Part 650*, Engineering Field Handbook unless a detailed design analysis

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

appropriate to the specific slope, flow depth and hydraulic conditions indicate that a higher velocity is acceptable.

Maximum design velocity for concrete-lined sections should not exceed those using Figure 2.

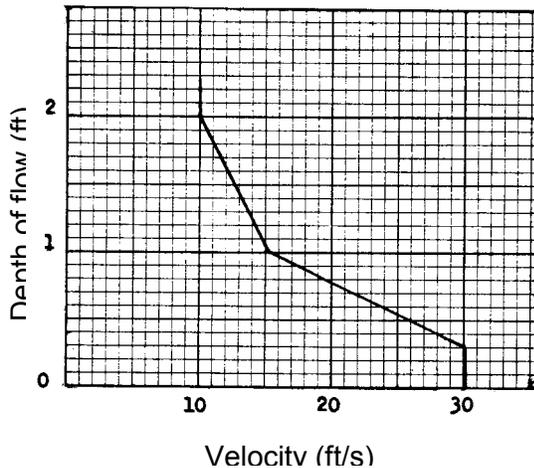


Figure 2. Maximum velocity versus depth of flow for concrete-lined channels

Maximum design velocity for synthetic turf reinforcement fabrics and grid pavers shall not exceed manufacturer's recommendations.

Stable rock sizes and flow depths for rock-lined channels having gradients between 2 percent and 40 percent may be determined using the following detailed design process. This design process is from **Design of Rock Chutes** by Robinson, Rice, and Kadavy.

For channel slopes between 2% and 10%:

$$D_{50} = [q(S)^{1.5}/4.75(10)^{-3}]^{1/1.89}$$

For channel slopes between 10% and 40%:

$$D_{50} = [q(S)^{0.58}/3.93(10)^{-2}]^{1/1.89}$$

$$z = [n(q)/1.486(S)^{0.50}]^{3/5}$$

D_{50} = Particle size for which 50% of the sample is finer, in.

S = Bed slope, ft./ft.

z = Flow depth, ft.

q = Unit discharge, ft³/s/ft

(Total discharge ÷ Bottom width)

Except for short transition sections, flow in the range of 0.7 to 1.3 of the critical slope must be avoided unless the channel is straight. Velocities exceeding critical velocity shall be restricted to straight reaches.

Waterways or outlets with velocities exceeding critical velocity shall discharge into an energy dissipator to reduce discharge velocity to less than critical.

Side slope. The steepest permissible side slopes, horizontal to vertical, shall be:

Nonreinforced concrete:

Hand-placed, formed concrete

Height of lining, 1.5 ft or less 1 to 1

Hand-placed screeded concrete or mortared in place flagstone

Height of lining, less than 2 ft 1 to 1

Height of lining, more than 2 ft 2 to 1

Slip form concrete:

Height of lining, less than 3 ft 1 to 1

Rock riprap 2 to 1

Synthetic Turf Reinforcement Fabrics.. 2 to 1

Grid Pavers..... 1 to 1

Cross section. The cross section shall be triangular, parabolic, or trapezoidal. Cross section made of monolithic concrete may be rectangular.

Freeboard. The minimum freeboard for lined waterways or outlets shall be 0.25 ft above design high water in areas where erosion-resistant vegetation cannot be grown adjacent to the paved or reinforced side slopes. No freeboard is required if vegetation can be grown and maintained.

Lining thickness. Minimum lining thickness shall be:

- Concrete.....4 in. (In most problem areas, minimum thickness shall be 5 in. with welded wire fabric reinforcing.)
- Rock riprap.....Maximum stone size plus thickness of filter or bedding
- Flagstone.....4 in., including mortar bed
- Synthetic Turf
Reinforcement Fabrics
and Grid Pavers.....Manufacturer's Recommendations

Lining Durability. Use of non-reinforced concrete or mortared flagstone linings shall be made only on low shrink-swell soils that are well drained or where subgrade drainage facilities are installed.

Related structures. Side inlets, drop structures, and energy dissipators shall meet the hydraulic and structural requirements for the site.

Outlets. All lined waterways and outlets shall have a stable outlet with adequate capacity to prevent erosion and flooding damages.

Geotextiles. Geotextiles shall be used where appropriate as a separator between rock, flagstone, or concrete linings and soil to prevent migration of soil particles from the subgrade, through the lining material. Geotextiles shall be designed according to AASHTO M288, Section 7.3.

Filters or bedding. Filters or bedding shall be used where appropriate to prevent piping. Drains shall be used to reduce uplift pressure and to collect water, as required. Filters, bedding, and drains shall be designed according to NRCS standards. Weep holes may be used with drains if needed.

Concrete. Concrete used for lining shall be proportioned so that it is plastic enough for thorough consolidation and stiff enough to stay in place on side slopes. A dense durable product shall be required. Specify a mix that can be certified as suitable to produce a minimum strength of 3,000 pounds per square inch.

Contraction joints. Contraction joints in concrete linings, if required, shall be formed transversely to a depth of about one-third the thickness of the lining at a uniform spacing in the range of 10 to 15 feet. Provide welded wire fabric or other uniform support to the joint to prevent unequal settlement.

CONSIDERATIONS

Cultural resources need to be considered when planning this practice. Where appropriate, local cultural values need to be incorporated into practice design in a technically sound manner.

Consider adding widths of appropriate vegetation to the sides of the waterway for wildlife habitat.

Important wildlife habitat, such as woody cover or wetlands, should be avoided or protected if possible when siting the lined waterway. If trees and shrubs are incorporated, they should be retained or planted in the periphery of the grassed portion of the lined waterways so they do not interfere with hydraulic functions and roots do not damage the lined portion of the waterway. Mid- or tall bunch grasses and perennial forbs may also be planted along waterway margins to improve wildlife habitat. Waterways with these wildlife features are more beneficial when connecting other habitat types; e.g., riparian areas, wooded tracts and wetlands.

Provide livestock and vehicular crossings as necessary to prevent damage to the waterway. Crossing design shall not interfere with design flow capacity.

Establish filter strips on each side of the waterway to improve water quality.

When designing riprap linings and specifying rock gradations, consider that rock delivered to the site is often segregated by size or does not conform exactly to the specified gradation. Adequate safety factor should be incorporated.

PLANS AND SPECIFICATIONS

Plans and specifications for lined waterways or outlets shall be in keeping with this standard and shall describe the requirements for applying the practice to achieve its intended purpose(s).

Plans (design drawings) shall include the waterway or outlet:

- a. type of lining material*
- b. lining thickness*
- c. quantity of material required*
- d. length*
- e. channel slope*
- f. alignment*
- g. top and bottom width*
- h. side slopes*
- i. depth*
- j. type of geotextile material*

OPERATION AND MAINTENANCE

The operation and maintenance guide for lined waterway or outlet shall be provided to and reviewed with the landowner.

REFERENCES

National Engineering Handbook, Part 650, Engineering Field Handbook: Chapter 16, Streambank and Shoreline Protection.

Robinson, K.M., C.E. Rice, and K.C. Kadavy. 1998. Design of Rock Chutes. Transactions of ASAE, Vol. 41(3): 621-626.