

NATURAL RESOURCES CONSERVATION SERVICE
CONSERVATION PRACTICE STANDARD

LINED WATERWAY OR OUTLET

(feet)
CODE 468

DEFINITION

A waterway or outlet having an erosion-resistant lining of concrete, stone, synthetic turf reinforcement fabrics, or other permanent material. The earth above the permanent lining may be vegetated or otherwise protected.

Scope

This standard applies to waterways or outlets having linings of non-reinforced, cast-in-place concrete; flagstone mortared in place; rock riprap; or similar permanent linings. It does not apply to irrigation water conveyance, grassed waterways with stone centers or small lined sections to carry prolonged flows.

PURPOSE

This practice may be applied as part of a resource management system to support one or more of the following purposes:

- Provide for safe conveyance of runoff from conservation structures or other water concentrations without causing erosion or flooding
- Stabilize existing and prevent future gully erosion
- Protect and improve water quality

Properly designed linings may also control seepage, piping, and sloughing or slides.

CONDITIONS WHERE PRACTICE APPLIES

This practice applies if the following or similar conditions exist:

1. Concentrated runoff, steep grades, wetness, prolonged base flow, seepage, or piping is such that a lining is needed to control erosion.
2. Use by people or animals precludes use of

vegetation waterways or outlets.

3. Limited space is available for design width, which requires higher velocities and lining.
4. Soils are highly erosive or other soil or climatic conditions preclude using vegetation only.
5. Steep grades, wetness, prolonged base flow, seepage, or piping would cause erosion.
6. Installation of non-reinforced concrete or mortared flagstone linings, shall be made only on low shrink-swell soils that are well-drained or where subgrade facilities are installed.

CRITERIA

General Criteria Applicable To All Purposes

Capacity. The maximum capacity of the waterway flowing at designed depth shall not exceed 200 ft³/s. The minimum capacity shall be adequate to carry the peak rate of runoff from a 10-year, 24-hour frequency storm. Velocity shall be computed by using Manning’s Formula with a coefficient of roughness “n” as follows:

Lining	“n” Value
Concrete	
Trowel finish.....	0.012 – 0.014
Float finish.....	0.013 – 0.017
Shotcrete.....	0.016 – 0.022
Flagstone.....	0.020 – 0.025
^{1/} Riprap - (Angular Rock)	$n = 0.047(D_{50} S)^{0.147}$
Synthetic Turf Reinforcement Fabrics and Grid Pavers	Manufacturer’s recommendations

^{1/} Applies on slopes between 2 and 40% with a rock mantle thickness of 2 x D₅₀ where:


D₅₀ = median rock diameter (in.),
S = lined section slope (ft./ft.) (.02 ≤ S ≤ .4)

Conservation practice standards are reviewed periodically, and updated if needed. To obtain the current version of this standard, contact the Natural Resources Conservation Service.

Velocity. Maximum design velocity and rock gradation limits for rock riprap-lined channel sections shall be determined using Appendix 16A, Engineering Field Handbook unless a detailed design analysis appropriate to the specific slope, flow depth and hydraulic conditions indicate that a higher velocity is acceptable.

Maximum design velocity for concrete-lined sections should not exceed those using Figure 2.

Figure 2. Maximum velocity versus depth of flow for

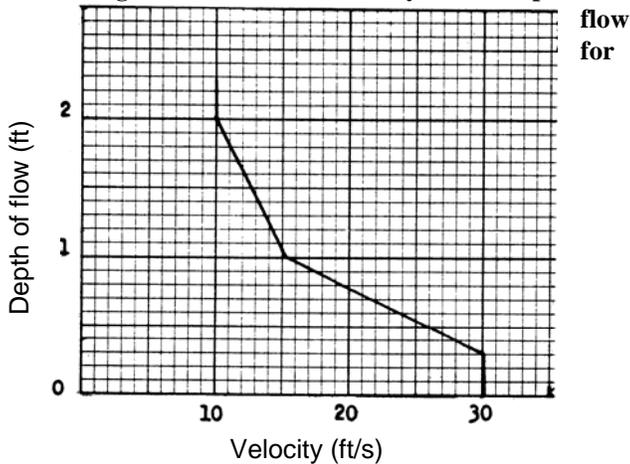

concrete-lined channels

Maximum design velocity for synthetic turf reinforcement fabrics and grid pavers shall not exceed manufacturer’s recommendations.

Stable rock sizes and flow depths for rock-lined channels having gradients between 2 percent and 40 percent may be determined using the following detailed design process. This design process is from **Design of Rock Chutes** by Robinson, Rice, and Kadavy.

For channel slopes between 2% and 10%:

$$D_{50} = [q(S)^{1.5}/4.75(10)^{-3}]^{1/1.89}$$

For channel slopes between 10% and 40%:

$$D_{50} = [q(S)^{0.58}/3.93(10)^{-2}]^{1/1.89}$$

$$z = [n(q)/1.486(S)^{0.50}]^{3/5}$$

D_{50} = Particle size for which 50% of the sample is finer, in.

S = Bed slope, ft./ft.

z = Flow depth, ft.

q = Unit discharge, ft³/s/ft

(Total discharge÷Bottom width)

Except for short transition sections, flow in the range of 0.7 to 1.3 of the critical slope must be avoided unless the channel is straight. Velocities exceeding critical velocity shall be restricted to straight reaches.

Waterways or outlets with velocities exceeding critical velocity shall discharge into an energy dissipator to reduce discharge velocity to less than critical.

Side slope. The steepest permissible side slopes, horizontal to vertical, shall be:

Nonreinforced concrete:

Hand-placed, formed concrete

Height of lining, 1.5 ft or less Vertical

Hand-placed screeded concrete or mortared in place flagstone

Height of lining, less than 2 ft 1 to 1

Height of lining, more than 2 ft 2 to 1

Slip form concrete:

Height of lining, less than 3 ft 1 to 1

Rock riprap 2 to 1

Synthetic Turf Reinforcement Fabrics ..2 to 1

Grid Pavers.....1 to 1

Cross section. The cross section shall be triangular, parabolic, or trapezoidal. Cross section made of monolithic concrete may be rectangular.

Freeboard. The minimum freeboard for lined waterways or outlets shall be 0.25 ft above design high water in areas where erosion-resistant vegetation cannot be grown adjacent to the paved or reinforced side slopes. No freeboard is required if vegetation can be grown and maintained.

Lining thickness. Minimum lining thickness shall be:

Concrete.....4 in. (In most problem areas, minimum thickness shall be 5 in. with welded wire fabric reinforcing.)

Rock riprap.....Maximum stone size plus thickness of filter or bedding

Flagstone.....4 in., including mortar bed

Synthetic Turf

Reinforcement Fabrics

and Grid Pavers.....Manufacturer’s Recommendations

Lining Durability. Use of non-reinforced concrete or mortared flagstone linings shall be made only on low shrink-swell soils that are well drained or where subgrade drainage facilities are installed.

Related structures. Side inlets, drop structures, and energy dissipaters shall meet the hydraulic and structural requirements for the site.

Outlets. All lined waterways and outlets shall have a stable outlet with adequate capacity to prevent erosion and flooding damages.

Geotextiles. Geotextiles shall be used where appropriate as a separator between rock, flagstone, or concrete linings and soil to prevent migration of soil particles from the subgrade, through the lining material. Geotextiles shall be designed according to AASHTO M288, Section 7.3.

Filters or bedding. Filters or bedding shall be used where appropriate to prevent piping. Drains shall be used to reduce uplift pressure and to collect water, as required. Filters, bedding, and drains shall be designed according to NRCS standards. Weep holes may be used with drains if needed.

Concrete. Concrete used for lining shall be proportioned so that it is plastic enough for thorough consolidation and stiff enough to stay in place on side slopes. A dense durable product shall be required.

Specify a mix that can be certified as suitable to produce a minimum strength of 3,000 pounds per square inch. Cement used shall be Portland cement, Types I, II, or if required, Types IV or V. Aggregate shall have a maximum size of 1-1/2 inch.

Contraction joints. Contraction joints in concrete linings, if required, shall be formed transversely to a depth of about one-third the thickness of the lining at a uniform spacing in the range of 10 to 15 feet. Provide welded wire fabric or other uniform support to the joint to prevent unequal settlement.

Rock riprap of flagstone

Stone used for riprap shall be dense and hard enough to withstand exposure to air, water, freezing, and thawing. Flagstone shall be flat for ease of placement and have the strength to resist exposure and breaking.

Mortar

Mortar used for mortared in-place flagstone shall consist of a workable mix of cement, sand, and water with a water-cement ratio of not more than 6 gallons of water per bag of cement.

CONSIDERATIONS

Cultural resources need to be considered when planning this practice. Where appropriate, local cultural values need to be incorporated into practice design in a technically sound manner.

Consider adding widths of appropriate vegetation to the sides of the waterway for wildlife habitat.

Important wildlife habitat, such as woody cover or wetlands, should be avoided or protected if possible when siting the lined waterway. If trees and shrubs are incorporated, they should be retained or planted in the periphery of the grassed portion of the lined waterways so they do not interfere with hydraulic functions and roots do not damage the lined portion of the waterway. Mid- or tall bunch grasses and perennial forbs may also be planted along waterway margins to improve wildlife habitat. Waterways with these wildlife features are more beneficial when connecting other habitat types; e.g., riparian areas, wooded tracts and wetlands.

Provide livestock and vehicular crossings as necessary to prevent damage to the waterway. Crossing design shall not interfere with design flow capacity.

Establish filter strips on each side of the waterway to improve water quality.

When designing riprap linings and specifying rock gradations, consider that rock delivered to the site is often segregated by size or does not conform exactly to the specified gradation. Adequate safety factor should be incorporated.

Cultural Resources Considerations

NRCS's objective is to avoid any effect to cultural resources and protect them in their original location. Determine if installation of this practice will have any effect on any cultural resources.

Document any specific considerations for cultural resources in the design docket and the Practice Requirements worksheet.

GM 420, Part 401, the California Environmental Handbook and the California Environmental Assessment Worksheet provide guidance on how the NRCS must account for cultural resources. The Field Office Technical Guide, Section II contains general information, with Web sites for additional information.

Endangered Species Considerations

Determine if installation of this practice with any others proposed will have any effect on any federal or state listed Rare, Threatened or Endangered species of their habitat. NRCS's objective is to benefit these species and others of concern or at least not have any adverse effect on a listed species. If the Environmental Evaluation indicates the action may adversely affect a listed species which has been determined to be critical habitat, NRCS will advise the land user of the requirements of the Endangered Species Act and recommend alternative conservation treatments that avoid the adverse effects. Further assistance will be provided only if the landowner selects one of the alternative conservation treatments for installation; or at the request of the landowners, NRCS may initiate consultation with the Fish and Wildlife Service, National Marine Fisheries Service and/or California Department of Fish and Game. If the Environmental Evaluation indicates the action will not affect a listed species or result in adverse modification of critical habitat, consultation generally will not apply and usually would not be initiated. Document any special considerations for endangered species in the Practice Requirements Worksheet.

Water Quantity

1. Effects upon components of the water budget, especially effects on volumes and rates of runoff, infiltration, evaporation transpiration, deep percolation, and ground water recharge.
2. Variability of the practice's effect caused by seasonal and climatic changes.

Water Quality

1. Filtering effects of vegetation on the movement of sediment and dissolved and sediment attached substances will be evaluated.
2. Effects on the visual quality of the water resources.
3. Short-term and construction effects on the quality of water resources.

PLANS AND SPECIFICATIONS

Plans and specifications for lined waterways or outlets shall be in keeping with this standard and shall describe the requirements for applying the practice to achieve its intended purpose(s).

OPERATION AND MAINTENANCE

An operation and maintenance plan shall be provided to and reviewed with the landowner. The plan shall include the following items and others as appropriate.

A maintenance program shall be established to maintain waterway capacity and outlet stability. Lining damaged by machinery or erosion must be repaired promptly.

Inspect lined waterways regularly, especially following heavy rains. Damaged areas shall be repaired immediately. Remove sediment deposits to maintain capacity of lined waterways.

Landowners should be advised to avoid areas where forbs have been established when applying herbicides. Avoid using waterways as turn-rows during tillage and cultivation operations. Prescribed burning and mowing may be appropriate to enhance wildlife values, but must be conducted to avoid peak nesting seasons and reduced winter cover. Control noxious weeds. Do not use as a field road. Avoid crossing with heavy equipment.

REFERENCES

- National Engineering Handbook, Part 650, Engineering Field Handbook: Chapter 16, Streambank and Shoreline Protection.
- Robinson, K.M., C.E. Rice, and K.C. Kadavy. 1998. Design of Rock Chutes. Transactions of ASAE, Vol. 41(3): 621-626.